

Highlights

- Wide temperature range: 550 to 3200 °C (1022 to 5792 °F)
- Sighting options:
 - Laser through the lens and Visible through the lens - Manual Variable focus
 - Video Camera through the lens and Visible through the lens - Manual Variable focus
 - LED through the lens and Visible through the lens - Manual Variable focus
- Superior optical resolution to 150:1
- Ethernet interface option (Provides access to PoE ASCII, Ethernet, Video, and Webserver)
- Profinet Interface option
- Programmable relay output
- Fail safe alarm
- Isolated analog output
- Ambient temperatures to 315 °C (600 °F) with ThermoJacket enclosure
- Rugged stainless steel housing, IP65 (NEMA 4) rated
- Unique "dirty window" alarm
- Endurance software for remote configuration and monitoring
- Endurance field calibration software
- One or two color operation


Electrical Specifications

Outputs	Ethernet, Profinet 0/4-20 mA, max. load: 500 Ω RS485 full duplex, networkable Relay, 48 V, 300 mA, response time < 2 ms
Power Supply	18 to 48 VDC, 500 mA Power over Ethernet (PoE)

General Specifications

Environmental Rating	IP65 (IEC529) / NEMA-4
Ambient Temperature	without cooling 0 to 65 °C (32 to 149 °F) with air cooling 0 to 120 °C (32 to 250 °F) with water cooling 0 to 175 °C (32 to 350 °F) with ThermoJacket 0 to 315 °C (32 to 600 °F)
Storage Temperature	-20 to 70 °C (68 to 158 °F)
Relative Humidity	10 to 95%, non-condensing
Shock	IEC 68-2-27
Vibration	IEC 68-2-6
Weight	Optical head 1200 g (42 oz) With air/water cooled housing 2460 g (87 oz)

Dimensions

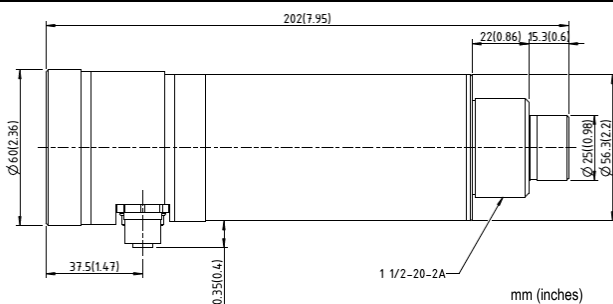


ENDURANCE™ Datasheet



Measurement Specifications

Temperature Range	E1RL 600 to 1800 °C (1112 to 3272 °F) (2 color mode) 550 to 1800 °C (1022 to 3272 °F) (single color mode) E1RH 1000 to 3200 °C (1832 to 5792 °F)
Spectral Response	1.0 μm nominal (Si/Si layered detector)
System Accuracy	± (0.5% T _{measured} + 2°C), T _{meas} in °C
Repeatability	±0.3% of temperature span
Temperature Resolution	0.1°C
Response Time	10 ms (95%)
Emissivity	0.10 to 1.10 in 0.01 increments (one-color)
Slope	0.850 to 1.150 in 0.001 increments (two-color)
Signal Processing	Peak hold, averaging

User Interface

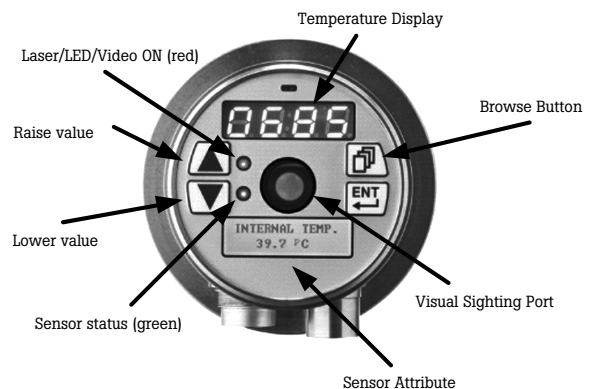


**CAUTION !
LASER LIGHT
DO NOT STARE
INTO BEAM
1 mW at 650 nm
CLASS II
LASER PRODUCT**

Accessories


The model includes a mounting nut, fixed bracket, end cap for display, operator's manual and Endurance software. Additional accessories are available:

- Adjustable bracket (E-AB)
- Air purge collar (E-AP)
- SpotScan™ Accessory (SSA or SSB) to allow Endurance sensors to scan over a line
- ThermoJacket enclosure for ambient temperatures to 315 °C (600 °F) (E-TJ1M metric version), see ThermoJacket documentation
- Polarizing filter end cap (E-PFEC)
- Terminal strip (E-TS)
- Switching power supply 100 / 240 VAC to 24 VDC, 1.25 A (E-PS)
- Power over Ethernet (PoE) Injector provides power and also acts as a single Ethernet hub (1 10/220 VAC input) (E-PoE)
- USB/RS485 Converter (E-USB485)
- Focus adjustment tool when the sensor is installed in a ThermoJacket (E-2CFT)
- Replacement front window incl. O-ring (E-PW)


Air/Water-Cooled Housing (Option)

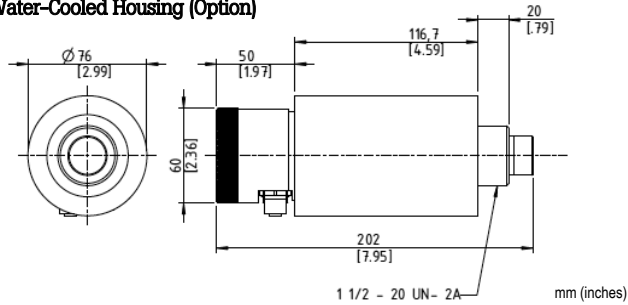


Adjustable Bracket (E-AB)

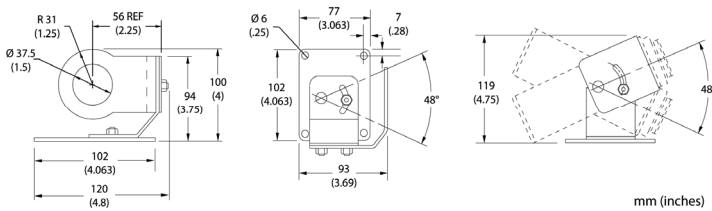

Fixed Bracket (E-FB)

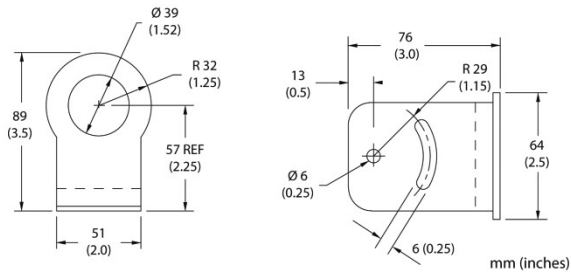

Air Purge Collar (E-AP)

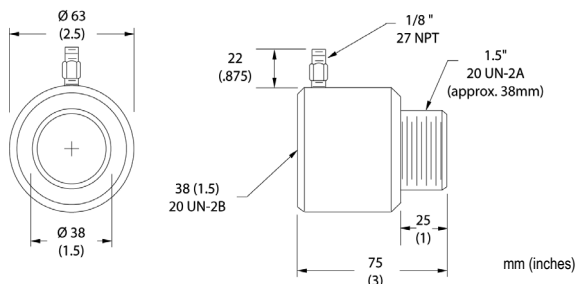

Optical Specifications

Optical Resolution D : S¹

E1RLF1	100 : 1
E1RHF1	150 : 1

Focus Distance

Close Focus F1	300 – 600 mm (12 – 24") – Manual Variable Focus
Standard Focus F2	600 mm – ∞ (24" – ∞) Manual Variable Focus

Smallest Spot Size²

E1RLF1	3 mm (.12")
E1RLF2	6 mm (.24")
E1RHF1	2 mm (.08")
E1RHF2	4 mm (.16")


¹ at 95% energy, D: Distance between sensor and object, S: diameter of spot size
² typical values at minimum focus distance, SF = Standard Focus, CF = Close Focus

Options

Options must be specified at time of order.

- Water-cooled housing, including air purge collar
- Profinet communications

SpotScan Accessory (SPA or SPB)

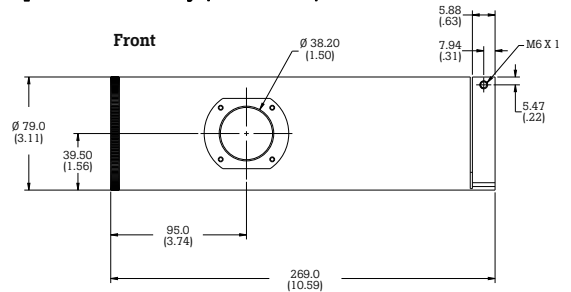

The Fluke Process Instruments Guarantee
 The Endurance Series is supported by a 4 year warranty. With a network of trained representatives and agents in over one hundred (100) countries and offices located in the U.S., Germany and China, we provide local service and support you can rely on time after time.

Fluke Process Instruments

Fluke Process Instruments North America

Santa Cruz, CA USA
 Tel: 1 800 227 8074 (USA and Canada, only)
 1 831 458 3900

solutions@flukeprocessinstruments.com

Fluke Process Instruments Europe

Berlin, Germany
 Tel: 49 30 4 78 00 80
info@flukeprocessinstruments.de

Fluke Process Instruments China

Beijing, China
 Tel: 8610 6438 4691
info@flukeprocessinstruments.cn

Worldwide Service

Fluke Process Instruments offers services, including repair and calibration. For more information, contact your local office or e-mail support@flukeprocessinstruments.com

www.flukeprocessinstruments.com

© 2015 Fluke Process Instruments
 Specifications subject to change without notice.
 9/2015 Rev. B