

GEORGE NELSON BUBBLE WALL SCONCE

FOR HERMAN MILLER, AVAILABLE FROM HAY



Designed by pioneering American designer George Nelson in 1947, and first produced in 1952, the Bubble Lamp signaled a revolution in the Modernist lighting industry. Available in an assortment of organic sizes and shapes, these elegant orbs were inspired by a set of silk-covered Swedish pendant lamps Nelson wanted for his office, but found to be too expensive. Employing the resourcefulness that characterized his working process, he decided to use a self-webbing plastic spray developed by the U.S. military, and applied it over a lightweight, rounded-steel frame to produce these soft, glowing fixtures.

PRODUCT DETAILS

- / Part of a progressive and technologically advanced lighting collection.
- / A family of refined wall sconces.
- / CE approved.
- / Suitable for both private and office environments.

MATERIAL

All Bubble Lamp models have a steel-wire skeleton on the interior which is spray coated with the translucent plastic polymer resulting in a lamp that is both opaque and transparent as it glows.

SHADE / Webbing polymer.

FRAME TOP & BOTTOM RING / Coated and brushed metal and nickel.

WALL BRACKET / A walnut wall-mount and steel arm, with a swivel hinge.

CABLE / White PVC insulation.

COLOUR

Available in 1 colour.

/ Off white

DIMENSIONS

NELSON BALL WALL SCONCE CABLED / SMALL

DIAMETER SHADE / 32,5 cm / 12.8"

DEPTH / 53,5 cm / 21.1"

HEIGHT SHADE / 30,5 cm / 12"

HEIGHT TOTAL / 42,5 cm / 16.7"

NELSON CIGAR WALL SCONCE CABLED / SMALL

DIAMETER SHADE / 26,5 cm / 10.5"

DEPTH / 50,5 cm / 19.9"

HEIGHT SHADE / 35,5 cm / 14"

HEIGHT TOTAL / 42,5 cm / 16.7"

NELSON PEAR WALL SCONCE CABLED / SMALL

DIAMETER SHADE / 33 cm / 13"

DEPTH / 53 cm / 20.9"

HEIGHT SHADE / 32 cm / 12.6"

HEIGHT TOTAL / 42,5 cm / 16.7"


NELSON SAUCER WALL SCONCE CABLED / SMALL

DIAMETER SHADE / 44,5 cm / 17.5"

DEPTH / 59 cm / 23.2"

HEIGHT SHADE / 18 cm / 7.1"

HEIGHT TOTAL / 42,5 cm / 16.7"

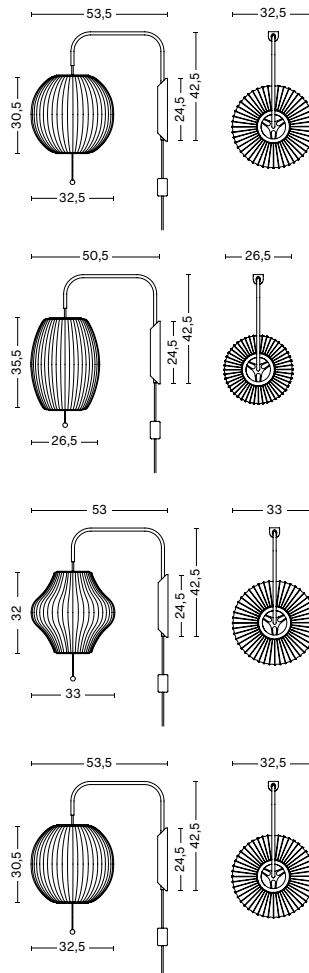

TECHNICAL SPECIFICATIONS

SMALL

- / RECOMMENDED LIGHT SOURCE / LED E27 (A15)*
- / POWER* (watts) / 5-8W
- / FLUX* (lumens) / 500-800lm
- / CCT & CRI / The levels will vary depending on the type of bulb used in the lamp.
- / DIMMABLE / No
- / POWER SUPPLY / 220-240V AC at 50/60Hz polarized plug and cable included.**
- / CORD LENGTH / 366 cm
- / SWITCH / Pull switch
- / RECOMMENDED LIGHT SOURCE / LED E27 (A15), 5-8W, 500-800lm, 2700-3000K, warm white.

* Bulb not included.

**EU/UK adaptors not included.

CERTIFICATIONS

- / CE approved: this product has been assessed and complies with the essential requirements of the relevant European directives.

LED  02  IP20  

Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including:

- / EN 60598-2-4:1997 (portable luminaires)
- / EN 60598-1:2015 (general requirements)

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance instructions, CE attestation of conformity certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

[Link to downloads.](#)

HAY