


FIVE PENDANT

tala®

SKU: CP-WHT-FIV-BP-01-US

FINISH: BRASS

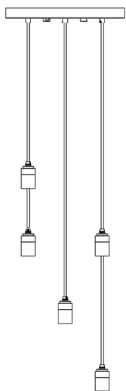

PHYSICAL

Pendant dimension:	L1 5/8in x W1 5/8in x H3 1/8in
Ceiling rose dimension:	L13 6/8in x W13 6/8in x H11 6/8in
Cable length:	10'
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	White/brass
Weight:	8.27 lbs
IP rating:	IP20 - Dry location
Base:	E26

ELECTRICAL

Power:	5 x Max 8 W
Voltage:	110-120 Vac
Frequency:	50/60 Hz



DIMMING

Dimmable 0-100%
Recommended dimmer Lutron Diva DVELV-300P

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala North America, Inc., 2 Research Place,
Suite 300, Rockville, MD 20850

EAN

5060915715944

tala.co.uk | hello@tala.co.uk | +44 7700 170343



Specification subject to change without
notice. Refer to our website for the most
recent product documentation. Tala
designs in the EU/UK are protected by
registered and or unregistered design rights

FIVE PENDANT

tala®

SKU: CP-BLK-FIV-GP-01-US

FINISH: GRAPHITE

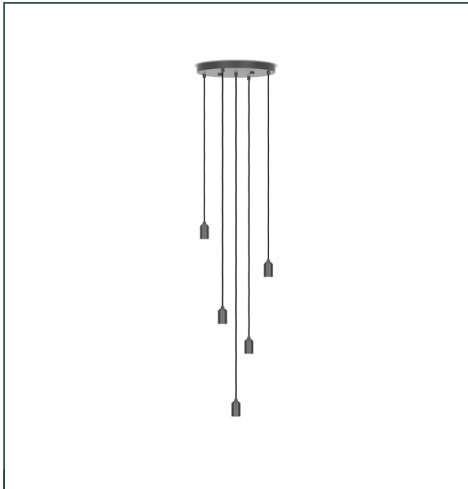

PHYSICAL

Pendant dimension:	L1 5/8in x W1 5/8in x H3 1/8in
Ceiling rose dimension:	L13 6/8in x W13 6/8in x H11 6/8in
Cable length:	10'
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	Black/graphite
Weight:	8.27 lbs
IP rating:	IP20 - Dry location
Base:	E26

ELECTRICAL

Power:	5 x Max 8 W
Voltage:	110-120 Vac
Frequency:	50/60 Hz



DIMMING

Dimmable 0-100%
Recommended dimmer Lutron Diva DVELV-300P

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala North America, Inc., 2 Research Place,
Suite 300, Rockville, MD 20850

EAN

5060915715951

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without
notice. Refer to our website for the most
recent product documentation. Tala
designs in the EU/UK are protected by
registered and or unregistered design rights

VORONOI II

3W | 150 lm | 2200K

VORN-II-3W-2200K-E26-T-120V

Voronoi II 3W 2200K E26 Tinted US LED Bulb


tala®

The Voronoi II is Tala's most recognised and best-selling light bulb, revered for its striking shape and subtle light output. With its elongated form and droplet shape, the lamp captures the beauty of the Fibonacci sequence as its singular filament wraps around a central glass column. Best paired with Tala's Brass pendant. Fitted with E26 base cap.




PHYSICAL

Bulb diameter:	6 4/8in
Bulb length:	10 6/8in
Glass shape:	A52*
Base:	E26
Materials:	Glass & nickel
Glass finish:	Tinted
Weight:	250g
Max. working temp.:	-5°C to 40°C
IP rating:	IP54



— C0/C80
— C0/C20

IES/LDT photometry files
and product photography
available on request



ELECTRICAL

Power:	3W
Current:	0.03A
Voltage:	110-120V~
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	50 lm/W
Lifetime:	15,000 hrs

ILLUMINATION

CCT:	2200K
Lumens:	150 lm
Incandescent equiv.:	16W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	80
TM30 - Rg	100
TM30 - Rf	94



DIMMING

Dimmable 0-100%
Recommended dimmer: Lutron Diva DVELV-300P
(For a full list of recommended and compatible dimmers see website)

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

LOGISTICAL

Unit Packaging	Outer Carton
PC/Ctn: 1	PC/Ctn: 3
Gross weight: 500	Gross weight: 1.9
L 8 1/8 x W 7 4/8 x H 13 6/8in	L 25 5/8 x W 9 x H 13 2/8in

us.tala.co.uk | hello@tala.co.uk | +1 (240) 724-8111

WARRANTY

2 years

EAN

5060400152131

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights