
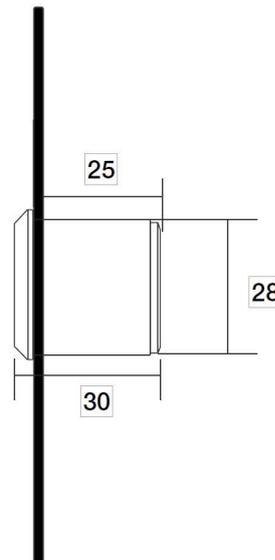


Specification

Model	NENMCLSDB
Dimensions	115L x 40W x 25H (mm)
Contact Rating	3A/12-24V
Power	12VDC or 24VDC
Output Contact	NO/NC/COM
Mechanical Life	500,000 Tests
Weight	0.112kg

Operating Temperature	-20°C ~ +55°C
Suitable Humidity	0-95% (relative humidity)
Detection Range	3 -15cm (adjustable)
LED Indicator	Blue LED Indicator (standby) Green LED Indicator (sensation)
Surface mount	Optional NEMSMB Back Box
Panel	1.7mm thick 304 stainless steel (wire drawing)
Installation Mode	Hollow Door

Diagram

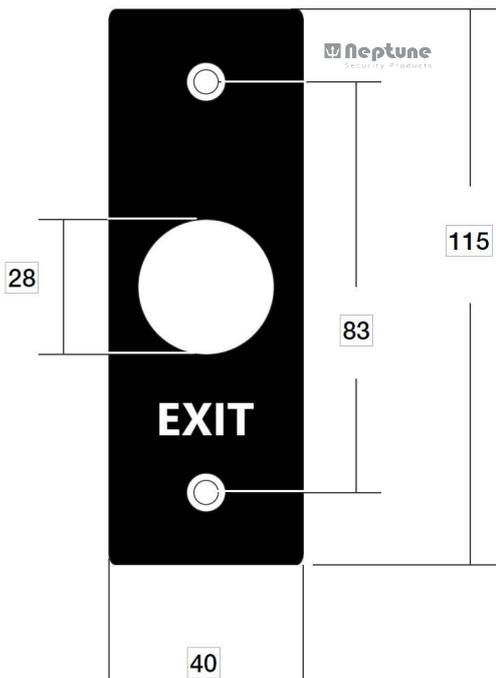

Detection Range Adjustment Screw

- Turn to the right to reduce the detection range
- Turn to the left to increase the detection range

Warranty

Neptune Security Products warrants that this product to be free from defects in materials and workmanship for a period of one (1) year from date of purchase. In the event of failure, Neptune Security Products will replace or repair the product at its sole discretion, and will not be responsible for any loss or damages in association with uses of its products. This warranty does not apply in the event of accidental damage and improper use, abuse, misuse, non approved purpose or act of God.