


Spirax Sarco 1/2" Brass BSP Steam Trap Valve BPT13S

Features:

- 1/2" BSP Female connection
- Balanced pressure thermostatic steam trap
- 16 bar pressure rating
- Brass body

Operating range

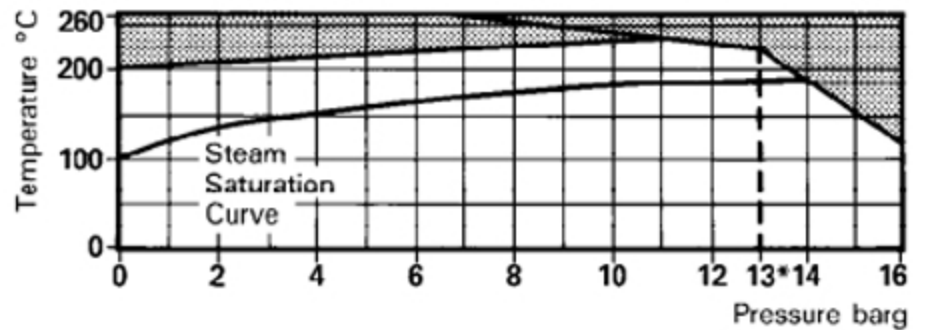

* PMO — Max. Operating pressure, recommended 13 barg.
□ — The product must not be used in this region.

Sizes and pipe connections

1/2 and 3/4 Screwed BSP (BS 21 parallel) or NPT.

Materials

No	Part	Material	
1	Body	Brass	BS 2872 CZ 122
2	Cap	Brass	BS 2872 CZ 122
3	'O' Ring	Synthetic Rubber High Fluorine Fluorocarbon	
4	Capsule	Stainless Steel	
5	Spring	Stainless Steel	BS 2056 302 S26
6	Spacer Plate	Stainless Steel	BS 1449 304 S16
7	Seat	Stainless Steel	BS 970 431 S29
8	Seat Gasket	Stainless Steel	BS 1449 304 S11
9	Union Nut and Tailpiece	Brass	BS 2872 CZ 122

Dimensions (approximate) in millimetres

BPT 13A

Size	A	B	C	D	E	Weight
1/2	20	38	53	25	55	0.4 kg
3/4	27	40	62	25	55	0.45 kg

BPT 13S

1/2	14	76	47	38	55	0.45 kg
3/4	20	80	53	40	55	0.5 kg

BPT13UA


1/2	20	67	53	25	55	0.5kg
3/4	27	75	62	25	55	0.55kg

BPT13US


1/2	19	105	52	38	55	0.55kg
3/4	22	115	57	40	55	0.6kg



BPT13S

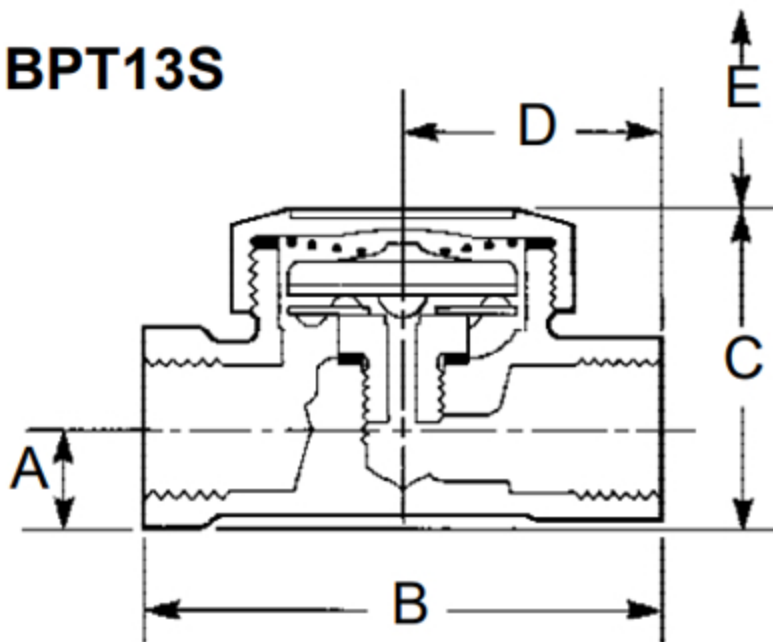

Capacities

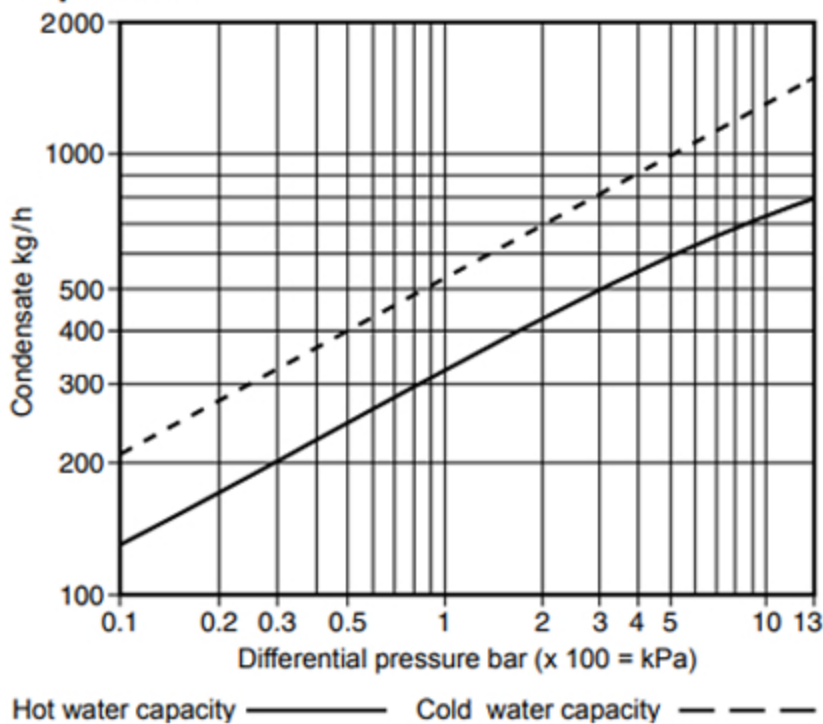

Hot water capacity ——— Cold water capacity - - - - -