

Louey

Designed by Jardan, Louey takes an elegant approach to the linear luminaire. Its sleek shade personifies a mix of sophistication and refinement. The solid diffuser emits a seamless, warm and ethereal glow. Louey is available in brass pendant or powder coated table and floor lamp.

Finishes

Brushed Brass

Lacquered Finish

Powdercoat Rivergum Beige Powdercoat Bronze

Powdercoat Moss

Powdercoat Reef

Features

Warm white LED

Dimmable

Rotational head for directional light


Solid frosted acrylic diffuser

Pendant



LUY138

request)

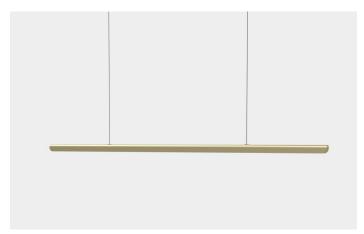

LUY178

Measurements	Weight	3kg
	Dimension	1790L x 29D x 43H mm
Fitting	Туре	LED Strip
	Dimmable	Yes
	Wattage	36W
	Voltage	24V
	Temp	2700K
	Lumens	4,275lm (Bulb)
	CRI	>80
Power	Avg Lifetime	50,000 hrs
	Driver	Phase-Cut (Standard), DALI (upon request)
	Input	230-240v 50Hz
	Cable Length	3m / 118"

Floor Light



LUY22

Weight	4.3kg
Dimension	225D x 1495H mm
Туре	LED Strip
Dimmable	Yes
Wattage	28W
Voltage	24VDC
Temp	2700K
Lumens (Bulb)	3,275lm (Bulb)
CRI	>80
Avg Lifetime	50,000 hrs
Switch	Floor Push Dimmer
Input	230-240v 50Hz
Cable Length	3m
	Dimension Type Dimmable Wattage Voltage Temp Lumens (Bulb) CRI Avg Lifetime Switch Input

Table Light



LUY40

Measurements	Weight	1.9kg
	Dimension	347L x 180D x 372H mm
Fitting	Туре	Integrated LED
	Dimmable	Yes
	Wattage	9W
	Voltage	24VDC
	Temp	2700K
	Lumens (Bulb)	1500lm (Bulb)
	CRI	>90
	Avg Lifetime	35,000 hrs
Power	Switch	In-Line Rotary Dimmer
	Input	230-240v 50Hz
	Cable Length	2.3m

Specifications

Crafted

Australian made since 1987, our furniture takes shape at our Design + Manufacturing HQ in Melbourne.

Warranty

Made to last, our lighting is covered by a 1 year structural warranty.

Certification



Fitting

Installation

Pendants must be wired, fitted and installed by a licensed electritian exclusively using the Jardan components.

Suspension

The standard pendant drop is 300cm/118" of cable provided which can be trimmed as required during installation.

FD Driver

Supplied with external LED driver. Driver must be installed remotely i.e. in wall/ceiling cavity.

Care

Brass Finish

Due to the process of finishing of brass process used in the manufacture of this product, variation in colour is to be expected. This product has been lacquered to protect the brass during

Cleaning

Wipe with a dry micro-fibre cloth only, ensuring light is turned off.