

# Resinex™ NR-1

## Nitrate removal from potable water

**Resinex™ NR-1** is a high purity, premium grade, strongly basic macroporous-type anion exchange resin, specially developed for selective nitrate removal from potable water in presence of high levels of sulphate. **Resinex™ NR-1** offers a superior operating capacity and an excellent selectivity to nitrate for economical treatment in co-flow and counter-flow systems.

### Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	macroporous, milky white, spherical beads
Functional group	Quaternary Ammonium
Whole bead count	95% min.
Ionic form, as shipped	Cl <sup>-</sup>
Bead size	(≥ 95%) 0.40 - 1.25 mm
Uniformity coefficient	1.60 max.
Bulk density, as shipped	700 kg/m <sup>3</sup>
Real density	1.07 g/cm <sup>3</sup>
Water retention	50 - 60%
Total capacity (Cl <sup>-</sup> form)	0.80 eq/l min.
Stability, temperature	100°C (Cl <sup>-</sup> Form) max.
Stability, pH	0 - 14

### Standard Design Conditions

Bed depth	> 750 mm
Service flow rate	8 - 30 BV/h
Backwash expansion	50 - 75%

### Key Features and Benefits

- **High Integrity Beads**  
Excellent resistance to mechanical degradation ensures low pressure drop
- **High Selectivity To Nitrate**  
To comply with local legislation
- **High Operating Capacity**  
Economical advantage
- **Pretreated - Direct Usage In Cartridges**  
Point-of-entry and Point-of-use
- **WRAS BS 6920 Approved**  
BS 6920 for cold water

### Typical Applications

- Nitrate removal from drinking water

### Standard Packaging

- 25 lit. PE valve bag
- 1000 litre big bag




TRADEMARK OF JACOBI CARBONS. WWW.JACOBI.NET


## Resinex™ NR-1

Nitrate removal from potable water

### Pressure Drop

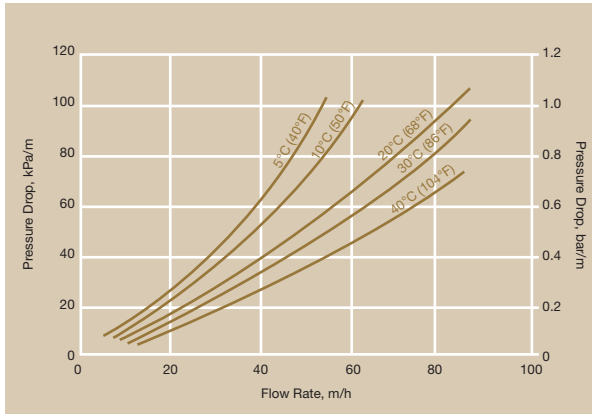

### Backwash Expansion

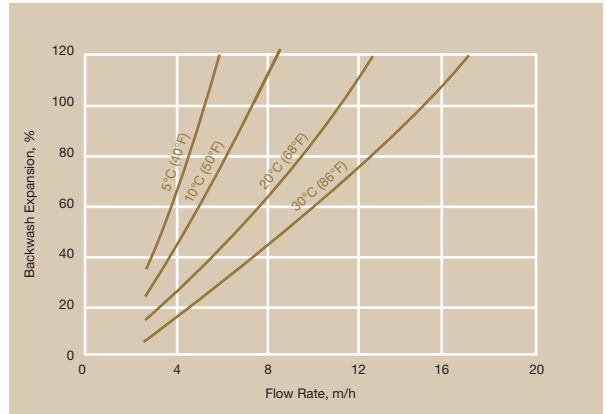

### Standard Regeneration Parameters

Regeneration	Co-Flow
Concentration	5-10% NaCl
Level	150-200 g/l
Flow rate regenerant	4-6 BV/h
Contact time regenerant	30-60 min.
Flow rate rinse	2-6 BV/h
Rinse water required	2 BV

### Product Packing



25 lit. polyethylene valve bag  
48 bags per pallet



Polypropylene FIBCs  
(big bag), 1.000 lit.



**CAUTION** Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



For more information or to contact Jacobi visit: [www.resinex.jacobi.net](http://www.resinex.jacobi.net)

**NOTICE** Due to the progressive nature of the Jacobi Carbons Group and the continually improving design and performance of our products, we reserve the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for customer's use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

© Copyright 2016 Jacobi, Jacobi Carbons, Resinex, the Resinex and the Jacobi logos are trademarks of Jacobi Carbons, all of which may or may not be used in certain jurisdictions.

RX-NR1\_e\_Rev14\_20160512

**Jacobi Corporate Headquarters**  
Slöjdaregatan 1  
SE-39353 Kalmar | Sweden  
Tel: +46 480 417550 | Fax: +46 480 417559  
info@jacobi.net | www.jacobi.net

