



JARDAN

SPECIFICATIONS

ATL40



# Atlas

Atlas pendant combines a classic form with modern functionality. The minimal silhouette is defined by a delicate arched link rising from the conical form. Both eye-catching yet unobtrusive, the thin woven cable combined with the lightweight construction gives the pendant a weightlessness in any space. Radiating long-lasting bright luminescence from a hand-blown opal glass dome, the Atlas pendant has a brushed finish with integrated LED light source.

Atlas comes in a range of configurations, please visit the Jordan website for more details.

### Finishes

- Black Anodised
- Champagne Gold Anodised


### Features

- Soft White Temp
- Dimmable
- Phase-Cut, 1-10V, DALI and Casambi Bluetooth available

## Pendant



Black Anodised

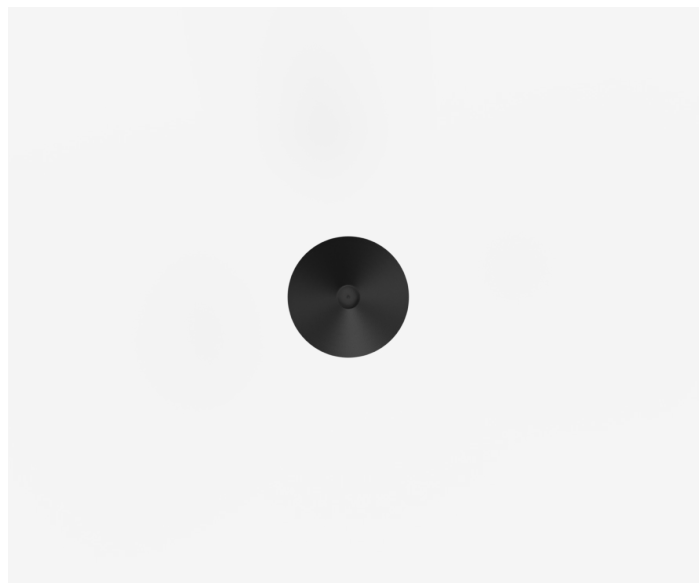

Top View

ATL40		
Measurements	Weight	1.2kg
	Dimension	400 x 270mm/16 x 11"
	Canopy	80 x 25mm/3 x 1"
Fitting	Type	Integrated LED
	Dimmable	Yes
	Wattage	15W LED
	Temp	3000K Soft White
	Lumens	670lm
	CRI	>80
Power	Avg Lifetime	50,000H
	Driver	Phase-cut (Standard), DALI, Casambi Bluetooth (upon Request)
	Input	230-240v 50Hz
	Cable Length	3m/118"



**Specifications**

**Crafted**

Australian made since 1987, our lighting takes shape at our Design + Manufacturing HQ in Melbourne.

**Warranty**

Made to last, our lighting is covered by a 1 year structural warranty.

**Certification**



**Fitting**

**Installation**

Pendants must be wired, fitted and installed by a licensed electrician exclusively using the jardan components.

**Suspension**

The standard pendant drop is 300cm/118" of cable provided which can be trimmed as required during installation.

**LED Driver**


Supplied with external LED driver. Driver must be installed remotely i.e. in wall/ ceiling cavity.

**Care**

**Cleaning**

Wipe with a dry micro-fibre cloth only, ensuring pendant is turned off.

**Photometrics**



**Beam Angle**

110

**Downloads**

Data and ies files available to download through the Jardan website.