Baya

Outdoor Hammock Lounge

KAMMOK


Setup Instructions

Table of Contents

Baya Frame Assembly	Page 2
Baya Table Assembly	Page 3
Baya Final Assembly	Page 4

Parts Included


Upper arm with brace joints x3



Lower arms x3



Table Section x3




Base joint x1



Baya Straps x6



Legs x3



Hardware Pack x1




WARNING: Max weight capacity is 350 lb per side. USE HAMMOCK STAND WITH CAUTION. INHERENT RISKS EXIST. Do not modify the stand or hammock in any way; modification may result in failure or injury and will void your lifetime warranty.


Baya Assembly

Baya Frame Assembly


- 1 Carefully remove and unpack all parts from the crate.
- 2 Insert the male end of the tear drop legs into the female end of the "Shepherds Crook" (upper arm). Secure tube in place using a 60mm M8 bolts. Repeat 3 times.

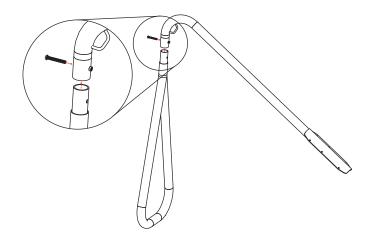

3 Slide the female end of the Lower arm tube onto the leg assembly. Insert and tighten 2 bolts into the lower set of holes on the reinforcement bracket. Repeat 3 times.

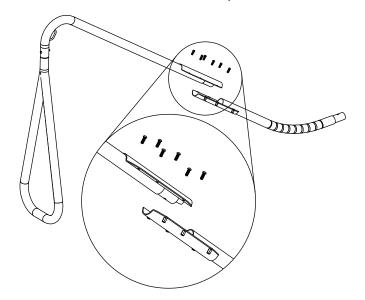


4 Insert the male end of all three leg assemblies into the 3 way center joint. Secure in place with the 60mm M8 Bolts.

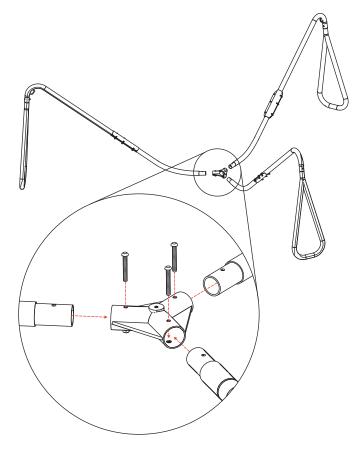


WARNING: Max weight capacity is 350 lb per side. USE HAMMOCK STAND WITH CAUTION. INHERENT RISKS EXIST. Do not modify the stand or hammock in any way; modification may result in failure or injury and will void your lifetime warranty.

Baya Table Assembly


1 Align all three table components in a triangular formation.




3 Secure the table to the welded support tubes with six 18mm M8 screws.

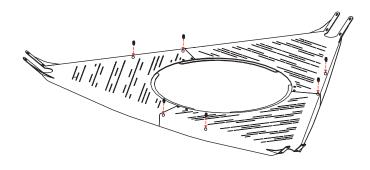

2 Carefully slide all 3 parts together, ensuring that the support tube and tabs nest properly.

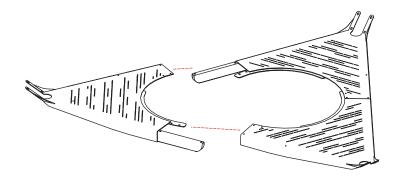


4 Tie the table pieces and the center hole support wings with six more 18mm M8 screws.

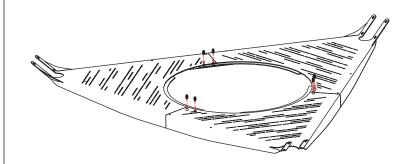

WARNING: Max weight capacity is 350 lb per side. USE HAMMOCK STAND WITH CAUTION. INHERENT RISKS EXIST. Do not modify the stand or hammock in any way; modification may result in failure or injury and will void your lifetime warranty.


Final Assembly

1 With two people, lift the full table assembly, and place it onto the frame assembly, as shown.

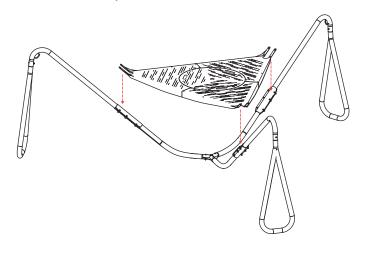

Carefully place the center circle over the hole, aligning the tabs with the gaps in the center hole supports. Rotate to secure in place.

2 Secure the table in place with twelve 25mm M8 screws. Four at each corner, securely connecting the table to the legs.

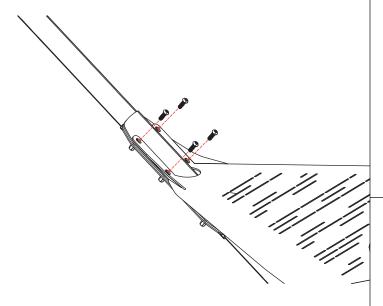

4 Connect two nano-weave straps to each leg loop.

