
## SKIPPER SMALL - TILOW WALL LIGHT LARGE

## Tom Raffield

**Product Specification** 

Skipper Small - Tilow Wall Light Large

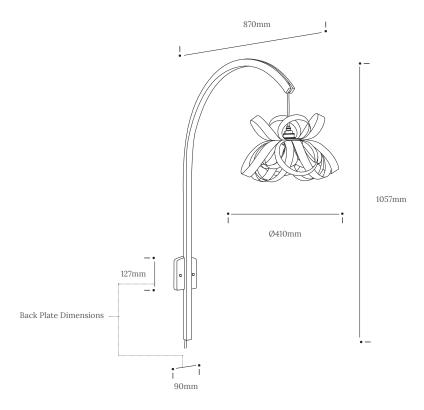

Representing the first strong branch that is born from a mighty oak tree, the Tilow Lighting Range allows nature's forms to enhance your interior's personality. A big sister to our Hanter design, the Tilow can suspend a simple exposed bulb, or showcase a selection of our iconic lampshades.

An arc of sustainably sourced oak grows up and out from a solid base, suspending the Skipper Pendant Small at perfect height to display a unique spectacle of light and shadow across your space. The Tilow's steam bent design will divide and balance your interior with ease as it illuminates with a warm, welcoming glow. Whether invited into your home to enhance your hallways energetic atmosphere or as living space radiance, this Large Tilow and Small Skipper duo extends unique, striking design to your walls.

Take your interior into a new chapter.

Product Type : Wall Light	OVI	747 1.	Dimensions I	Dimensions L x W x H (mm)		Weight (kg)	
	SKU	Wood types	Unboxed	Boxed	Unboxed	Boxed	
Skipper Small - Tilow Wall Light Large :	TR-TILO-WL-LRG-SKIP-O-SML	Oak	410 x 870 x 1057	1350 x 200 x 655 + 457 x 457 x 305	1.220		
Materials					Other m	naterials	
	Oak					Birch ply hanging disk	
Finish	Finished with a blend of natural wax oils to give a protective, hardwearing and beautiful finish.						
Wiring	Brass bulb holder with black inline switch and plug	Wiring kit	Flex		Reccomended light bulb		
		Plastic inline switch	Flex colour: grey fabric		Max 25W LED		
		E27 (240v)	Cable length: 328cm from	Cable length: 328cm from plug to bulb holder		Max 25W LED	
Care information	Dusting your light regularly and with a light feather duster should keep your light looking clean, otherwise wipe with a damp cloth and remove any moisture with a dry cloth. Gentle furniture polishes can also be used.						
Additional information	<ul> <li>Suitable for use on 240v circuits.</li> <li>Installation instructions and fixings included. This product can be plugged straight into a 240v outlet.</li> <li>If hardwiring into the main supply, this product must be installed by a qualified electrician.</li> </ul>						