FWH09A

2.4GPM Tankless Gas Water Heater

Tankless Gas Water Heater With Door

Wall Controller

* Sold Separately

Main Features

HOT WATER CAPACITY | CONSISTENT TEMPERATURE | ELECTRONIC IGNITION | OVER TEMP. PROTECTION | AUTO TURN OFF | BLOWER BLOCK PROTECTION | REMOTE CONTROLLER | LOW PRESSURE ALARM | PRESSURE RELIEF VALVE

FURRION

Gas Water Heater

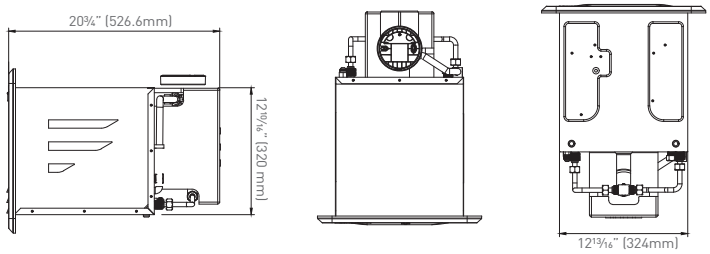

Remote Control

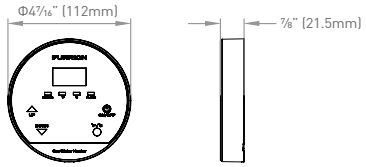

Door

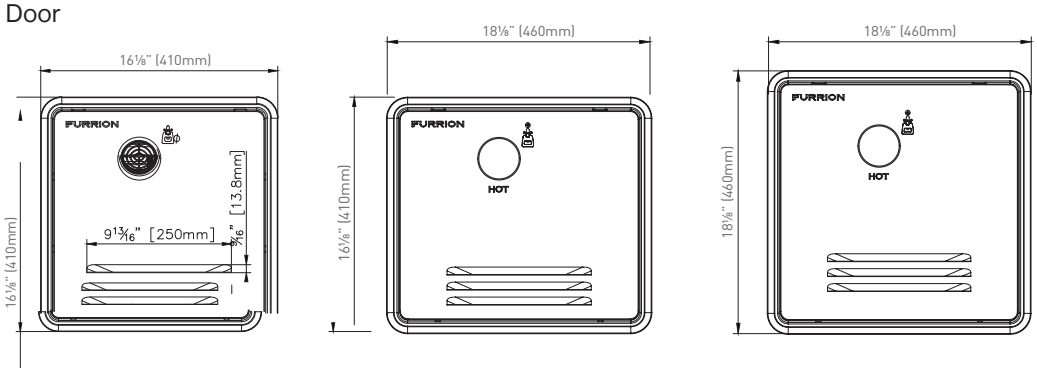

Functions

Temperature Setting Range	95 -124 ˚F (35 - 51 ˚C)
Default setting temperature	115 ˚F (46 ˚C)
Temperature Stability	Temperature Stabilizer Technology (±1.8-2.6 ˚F (1-2 ˚C))
Operating Water Flow	≤0.32 GAL (1.2L)/min
Low Water Flow Protection	Auto Cut-off <0.32GAL (1.2L)/min
Over Current Protection	10amp Fuse
High Water Pressure Protection	≥87psi (6bar)Auto Release Pressure Valve
Over Temperature Protection	Software Protection - 136 ˚F, ±1.8 ˚F (76 ˚C, ±1 ˚C) Thermal Sensor - 135 ˚F, ±14.4 ˚F (75 ˚C, ±8 ˚C)
Automatic ignition	√
Exhaust Blocking Protection	√

Specifications

Input BTU	13,000 ~ 60,000BTU
Heating Elements	Copper Heat Exchanger
Thermal Efficiency	≥81%
Gas Supply	LP (Propane) Only
Gas Inlet Pressure	11" - 14" inch WC
Electric Power Supply	DC 12V 3A
Working Pressure (Water Inlet)	10 - 65 PSI (0.68 - 4.5bar)
Water Flow	0.32 GAL/min (1.2 L) – 2.4 GAL/min (9L).
Gas Line Connector	UNF 5/8" – 18
Water Inlet Connector	1/2" NPT
Water Outlet Connector	1/2" NPT
Operating Noise	≤65db

Dimensions/Weight

Product Dimensions (WxHxD)	29 15/16 x 15 12/16 x 15 1/16"
	324 x 320 x 526.6mm
Gross Weight (lbs/kg)	30.86 / 14
Net Weight (lbs/kg)	27.6 / 12.5

Customer Service & Technical Support: Email: support@furrion.com Tel: (888) 354 5792 www.furrion.com

Furrion® and the Furrion logo are trademarks licensed for use by Furrion Ltd. and registered in the U.S. and other countries. © 2007-2019 Furrion Ltd.