



# FIVE PENDANT

tala®

SKU: CP-WHT-FIV-BP-01-US

FINISH: BRASS

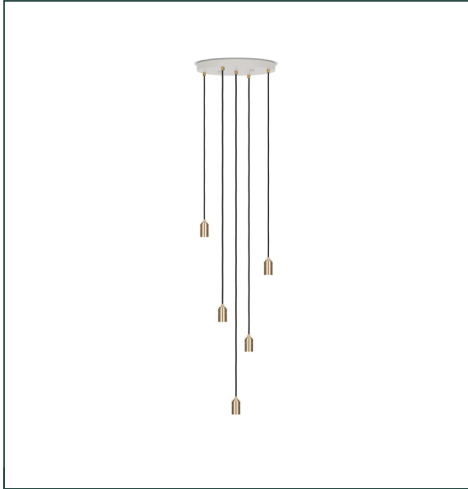

## PHYSICAL

Pendant dimension:	L1 5/8in x W1 5/8in x H3 1/8in
Ceiling rose dimension:	L13 6/8in x W13 6/8in x H11 6/8in
Cable length:	10'
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	White/brass
Weight:	8.27 lbs
IP rating:	IP20 - Dry location
Base:	E26

## ELECTRICAL

Power:	5 x Max 8 W
Voltage:	110-120 Vac
Frequency:	50/60 Hz



## DIMMING

Dimmable 0-100%  
Recommended dimmer Lutron Diva DVELV-300P

Tala Energy Ltd. 25b Vyner Street,  
London, E2 9DG, United Kingdom

## WARRANTY

2 years

Tala North America, Inc., 2 Research Place,  
Suite 300, Rockville, MD 20850

## EAN

5060915715944

tala.co.uk | hello@tala.co.uk | +44 7700 170343



Specification subject to change without  
notice. Refer to our website for the most  
recent product documentation. Tala  
designs in the EU/UK are protected by  
registered and or unregistered design rights

# FIVE PENDANT

tala®

SKU: CP-BLK-FIV-GP-01-US

FINISH: GRAPHITE

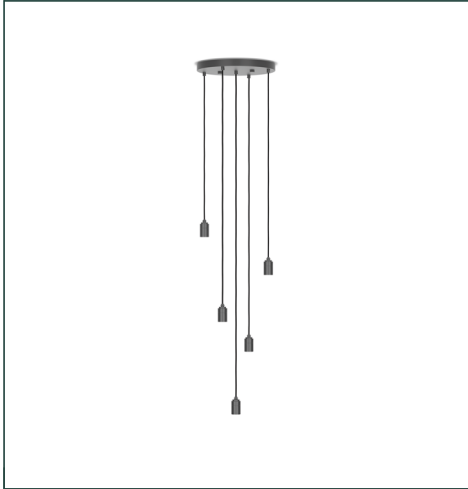

## PHYSICAL

Pendant dimension:	L1 5/8in x W1 5/8in x H3 1/8in
Ceiling rose dimension:	L13 6/8in x W13 6/8in x H11 6/8in
Cable length:	10'
Materials:	Powdercoated Steel/Anodised Aluminium
Finish:	Black/graphite
Weight:	8.27 lbs
IP rating:	IP20 - Dry location
Base:	E26

## ELECTRICAL

Power:	5 x Max 8 W
Voltage:	110-120 Vac
Frequency:	50/60 Hz



## DIMMING

Dimmable 0-100%  
Recommended dimmer Lutron Diva DVELV-300P

Tala Energy Ltd. 25b Vyner Street,  
London, E2 9DG, United Kingdom

## WARRANTY

2 years

Tala North America, Inc., 2 Research Place,  
Suite 300, Rockville, MD 20850

## EAN

5060915715951

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without  
notice. Refer to our website for the most  
recent product documentation. Tala  
designs in the EU/UK are protected by  
registered and or unregistered design rights

# VORONOI III

5W | 250 lm | 2200K

VORN-III-5W-2200K-E26-T-120V-02

Voronoi III 5W 2200K E26 Tinted US LED Bulb, V.2


tala®

The Voronoi III bulb by Tala is noted for its oversized form and dramatic light output. The exposed internal filament mirrors the Fibonacci sequence, wrapping around a central glass column, and the unique glass shape catches the eye and the imagination. Fitted with E26 base cap.



## PHYSICAL

Bulb diameter:	7 5/8in
Bulb length:	13 3/8in
Glass shape:	A52*
Base:	E26
Materials:	Glass & nickel
Glass finish:	Tinted
Weight:	355g
Max. working temp.:	-5°C to 40°C
IP rating:	IP54




## ELECTRICAL

Power:	5W
Current:	0.04A
Voltage:	110-120V~
Frequency:	50/60Hz
Power factor:	0.9
Efficiency:	50 lm/W
Lifetime:	15,000 hrs

## ILLUMINATION

CCT:	2200K
Lumens:	250 lm
Incandescent equiv.:	25W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	80
TM30 - Rg	100
TM30 - Rf	94

IES/LDT photometry files and product photography available on request



## DIMMING

Dimmable 0-100%  
Recommended dimmer: Lutron Diva DVELV-300P  
(For a full list of recommended and compatible dimmers see website)

Tala Energy Ltd. 25b Vyner Street,  
London, E2 9DG, United Kingdom

Tala North America, Inc., 2 Research Place,  
Suite 300, Rockville, MD 20850

us.tala.co.uk | hello@tala.co.uk | +1 (240) 724-8111

## LOGISTICAL

Unit Packaging	Outer Carton
PC/Ctn: 1	PC/Ctn: 2
Gross weight: 580	Gross weight: TBC
L 9 7/8 x W 9 7/8 x H 15 6/8in	L TBC x W TBC x H TBCin

## WARRANTY

2 years

## EAN

5060400159673

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights