


US CORE RECESSED TRIM SPOTLIGHT WHITE WITH LIGHT ENGINE T50 2000-3000K LED

tala®

SKU: CORE-SL-WT-T50-2000-3000K-01-US

FINISH: WHITE

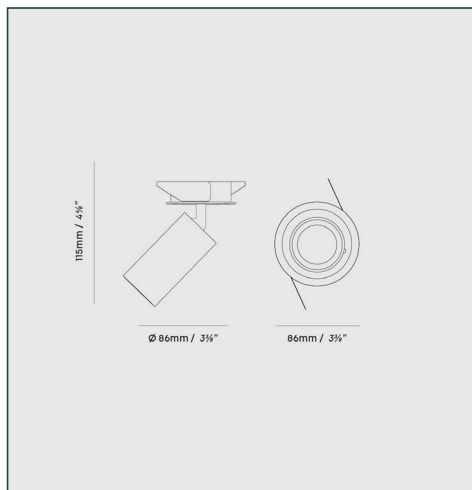

FIXTURE - PHYSICAL

Fixture dimension:

L 3 3/8in x W 3 3/8in x H 4 4/8in

Recessed Depth:

L 3 3/8in x W 3 3/8in x H 1in

Materials:

Aluminium

Finish:

White

Weight:

0.56 lbs

IP rating:

IP20 - Suitable for dry location

FIXTURE - ELECTRICAL

Power:

7W

Voltage:

110-120V~

Frequency:

50/60Hz

BULB

Bulb dimension:

L 2in x H 2in

Glass shape:

T16

Materials:

Glass and aluminium

Glass finish

Clear

Weight

0.28lbs

Max. working temp.:

40 °C

IP rating:

IP20

Power:

7W

Current:

0.06A

Voltage:

110-120V~

Frequency:

50/60Hz

ILLUMINATION PER BULB

CCT:

2000-3000K

Lumens:

530lm

Incand equiv:

44W

Flicker:

<5%

Beam angle:

36°

Light source:

LED

CRI:

95Ra

R9:

85

TM30-Rg:


100

TM30-Rf:

90



IES/LDT photometry files and product
photography available on request

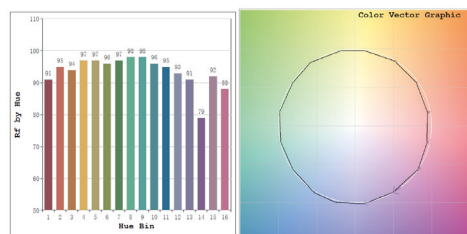

WARRANTY

2 years

EAN

5061046294063

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala North America Inc.
C/O LH Frishkoff & Company
546 5th Avenue, FL 9
New York NY 10036
United States

talalighting.com | hello@tala.co.uk | +1 (240) 724-8111