


PULL-OUT KITCHEN MIXER

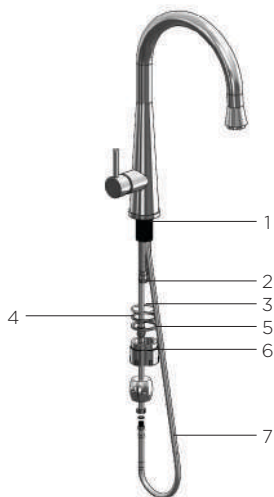

1. Threaded tube
2. Flexible hoses
3. O-ring
4. Rubber seal
5. Fixing plate
6. Fixing nut
7. Inlet hoses

INSTALLATION INSTRUCTIONS

1. Position the mixer over the center of the hole to be used for mounting. Ensuring the flexible hoses and threaded tube are pushed through first.
2. Place the rubber seal (part 2) over the flexible hoses and push up until it is firm against the surface being mounted on, then push (part 5 + part 6) the fixing plate and fixing nut over the flexible hoses and tighten firmly.



3. Attach the counter weight to the pull out flexible hose (part 2) DO NOT TIGHTEN (as the counter weight will need to be adjusted later on. Connect the flexible hoses and tighten (part 7) to the water outlet ensuring the rubber seal is not missed.
4. Adjust the counter weight now to ensure the hose will retract correctly, then tighten. Connect the flexible hoses to the isolating stop cocks (check that as the hoses are being tightened that they are not loosening on the mixer body). Test for leaks.

