



KILTER PENDANT

tala

SKU: KLT-640-2200K-SB-PD-01-US

FINISH: BRASS

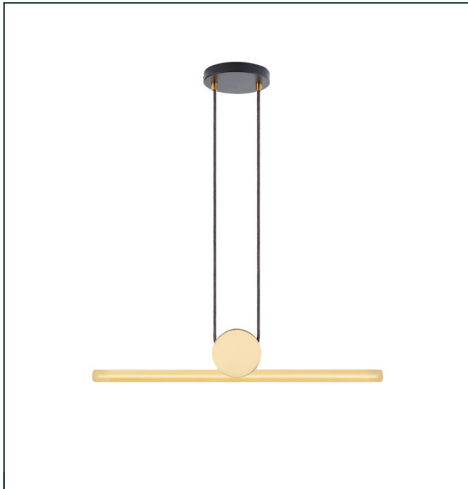

The light source can all be easily replaced.
For replacement parts, please visit our
website or contact us at customerservice@tala.co.uk.

FIXTURE - PHYSICAL

Pendant dimension:	L44mm x W640mm x H122mm L1 6/8in x W25 2/8in x H4 6/8in
Ceiling rose dimension:	L150mm x W150mm x H21mm L6in x W6in x H1in
Cable length:	3m
Materials:	Brass
Finish:	Polished brass
Weight:	1995g
IP rating:	IP44 - Suitable for wet locations

BULB - PHYSICAL

Bulb dimension:	L30mm x W640mm L1 1/8in x W25 2/8 in
Glass shape:	T30
Materials:	Glass and nickel
Glass finish	Frosted
Weight	195g
Max. working temp.:	-5 to 40 °C
IP rating:	IP54
Power:	6W
Current:	0.03A
Voltage:	110-120V~
Frequency:	50/60Hz
Base:	S14D

ILLUMINATION

CCT:	2200K
Lumens:	375lm
Incand equiv:	32W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	75
TM30-Rg:	95
TM30-Rf:	92

ELECTRICAL

Appliance class:	N/A
Power factor:	0.9
Efficiency:	63lm/W
Lifetime:	15,000 hrs



DIMMING

Dimmable 0-100%
Recommended dimmer Lutron Diva DVELV-300P

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

EAN

5060915715395

tala.co.uk | hello@tala.co.uk | +44 7700 170343



Specification subject to change without
notice. Refer to our website for the most
recent product documentation. Tala
designs in the EU/UK are protected by
registered and or unregistered design rights

KILTER PENDANT

tala.

SKU: KLT-640-2700K-SB-PD-01-US

FINISH: BRASS

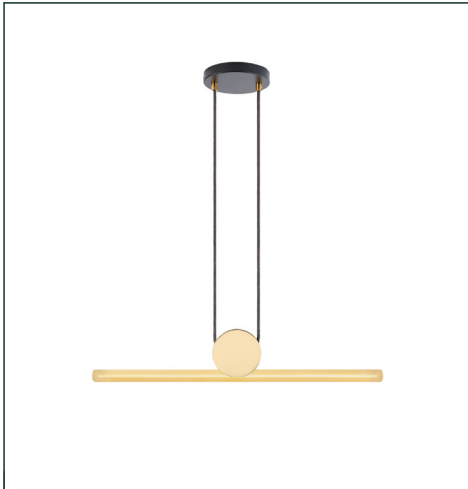

The light source can all be easily replaced. For replacement parts, please visit our website or contact us at customerservice@tala.co.uk.

FIXTURE - PHYSICAL

Pendant dimension:	L44mm x W640mm x H122mm L1 6/8in x W25 2/8in x H4 6/8in
Ceiling rose dim.:	L150mm x W150mm x H21mm L6in x W6in x H1in
Cable length:	3m
Materials:	Brass
Finish:	Polished brass
Weight:	1995g
IP rating:	IP44 - Suitable for wet locations

BULB - PHYSICAL

Bulb dimension:	L30mm x W640mm L1 1/8in x W25 2/8 in
Glass shape:	T30
Materials:	Glass and nickel
Glass finish	Frosted
Weight	195g
Max. working temp.:	-5 to 40 °C
IP rating:	IP54
Power:	6W
Current:	0.03A
Voltage:	110-120V~
Frequency:	50/60Hz
Base:	S14D

ILLUMINATION

CCT:	2700K
Lumens:	375lm
Incand equiv:	32W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	75
TM30-Rg:	97
TM30-Rf:	94

ELECTRICAL

Appliance class:	N/A
Power factor:	0.9
Efficiency:	63lm/W
Lifetime:	15,000 hrs



DIMMING

Dimmable 0-100%
Recommended dimmer Lutron Diva DVELV-300P

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

EAN

5060915715418

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without notice. Refer to our website for the most recent product documentation. Tala designs in the EU/UK are protected by registered and or unregistered design rights