
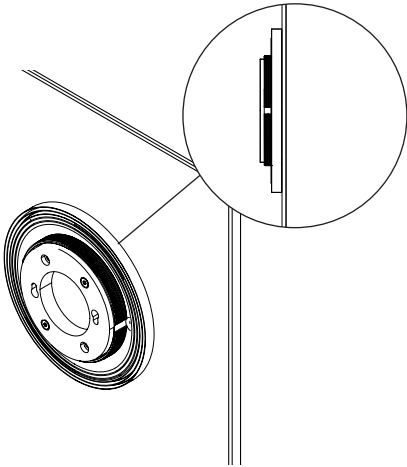


Firth Wall Light - Installation on a mirror

Mirror hole = Ø100mm (3.9in)

Ensure the mounting screws and powercable can be installed into a solid wall behind the mirror.

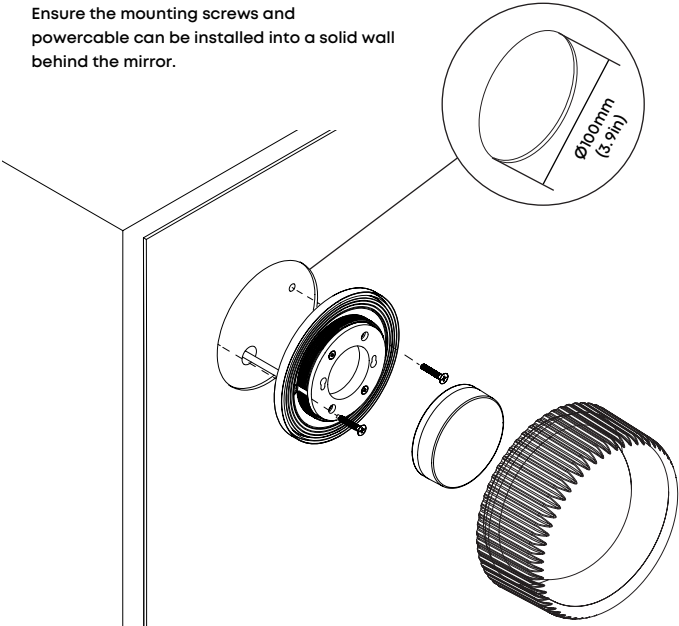

Ensure the silicone gasket is fully sealed flush against the mirror surface to prevent water and humidity ingress.

Gasket diameter = Ø120mm (4.7in)