

Minimal Track



reddot winner 2020
innovative product



reddot winner 2020
lighting design



archiproducts
DESIGN AWARDS



Bronze Delta
ADI Awards 2020





2020 HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARD



WINNER
2020




24V SYSTEM MINIMAL TRACK



MINIMAL TRACK 24V Profile 2m

A384-02-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24 V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded

A384-00-03- | N |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.




MINIMAL TRACK 24V End Cap

A384-00-05- | N |






MINIMAL TRACK 24V Connection Box

A384-00-06- | N |





			P	V	D (A x B x C)
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT	40W	24V	280 x 30 x 24mm
		A384-00-08- NT	100W	24V	280 x 30 x 24mm
220/240 V~ Included ON/OFF 24Vdc Power Supply.					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm
220/240 V~					
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm
		0433-01-33	CASAMBI	24V	172 x 42 x 20mm
		0434-01-64	WIFI	24V	105 x 44 x 23mm



24 V

DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm ²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X


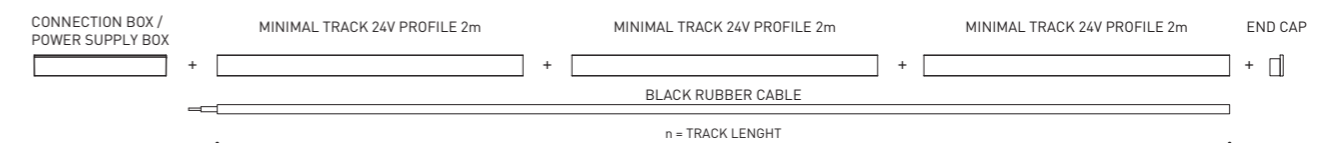
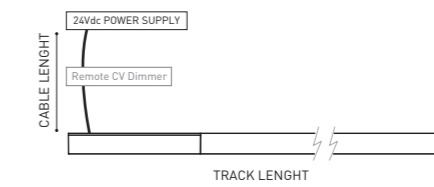


COLOUR | N ■ | NT ■ |

RAL ⓘ » 538

DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION



MINIMAL TRACK 24V Suspension

Profile 2m

A384-02-00- | N |

Profile 2m Initial feed kit

A400-02-10- | N |

Profile 2m Middle feed kit*



A400-02-20- | N |

* Unidirectional Middle Feed.

MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |

n = Total Length of System.

24 V | Max. 4A

MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02- | N |

MINIMAL TRACK 24V Suspension Kit


A400-02-04- | N |

Max distance between suspension kits = 100 cm.

MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included.



			P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07- NT	100W	24V	280 x 30 x 36mm


220 V~ | 240 V~ | Included ON/OFF 24Vdc Power Supply.

MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm

220 V~ | 240 V~


MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm
		0433-01-33	CASAMBI	24V	172 x 42 x 20mm
		0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V

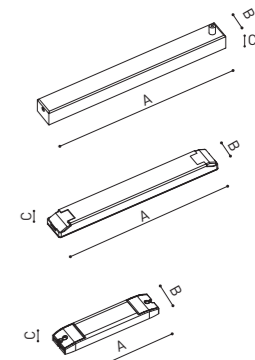

DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

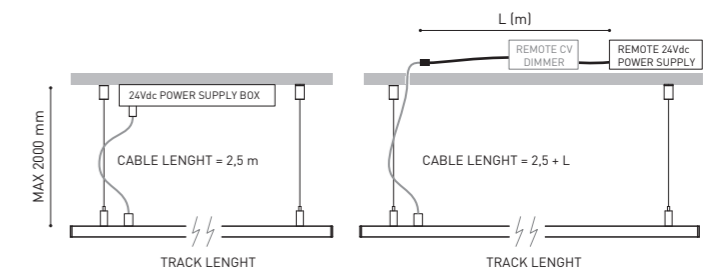


OPTIONAL ACCESSORIES



WIRE TRIMLESS Accessories

Coaxial Trimless A023-00-03- | W | N |

FASTENERS NOT AVAILABLE.



COAXIAL TRIMLESS

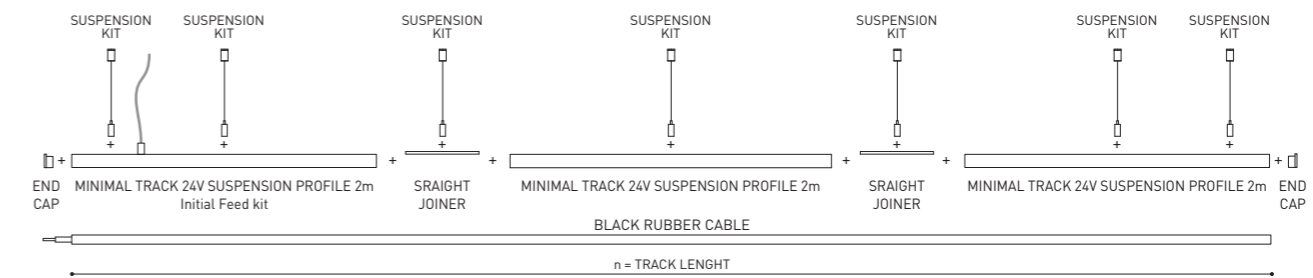

COLOUR | N ■ | NT ■ |

RAL ⓘ » 538


DIM OPTIONS PLEASE CONSULT



>> MORE INFO

		P	CCT	I	Flux	LOR
BLACK FOSTER Micro 24V 5	A415-20-10- N	7W	2700K	500mA	775 lm	87%
	A415-20-11- N	7W	3000K	500mA	800 lm	87%
	A415-20-12- N	7W	4000K	500mA	850 lm	87%

24 V | IP20 | CRI>90 | L90B10 >60.000h



COLOUR | N ■ |

MATERIAL | AL | ABS+PC |

RAL » 538


» PLEASE CONSULT



>> MORE INFO

		P	CCT	I	Flux	LOR
ALASKA 24V	A385-00-00- N	3,5W	2700K	400mA	390 lm	30%
	A385-00-01- N	3,5W	3000K	400mA	410 lm	30%


24 V | III | IP20 | CRI>90 | L80B10 >60.000h

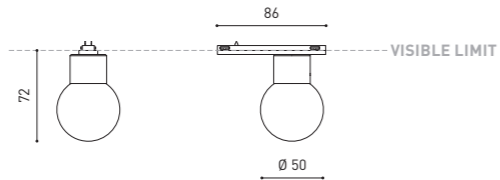

COLOUR | N ■ | MATERIAL | AL | OPTICAL GLASS |

RAL ⓘ » 538

ⓘ » PLEASE CONSULT

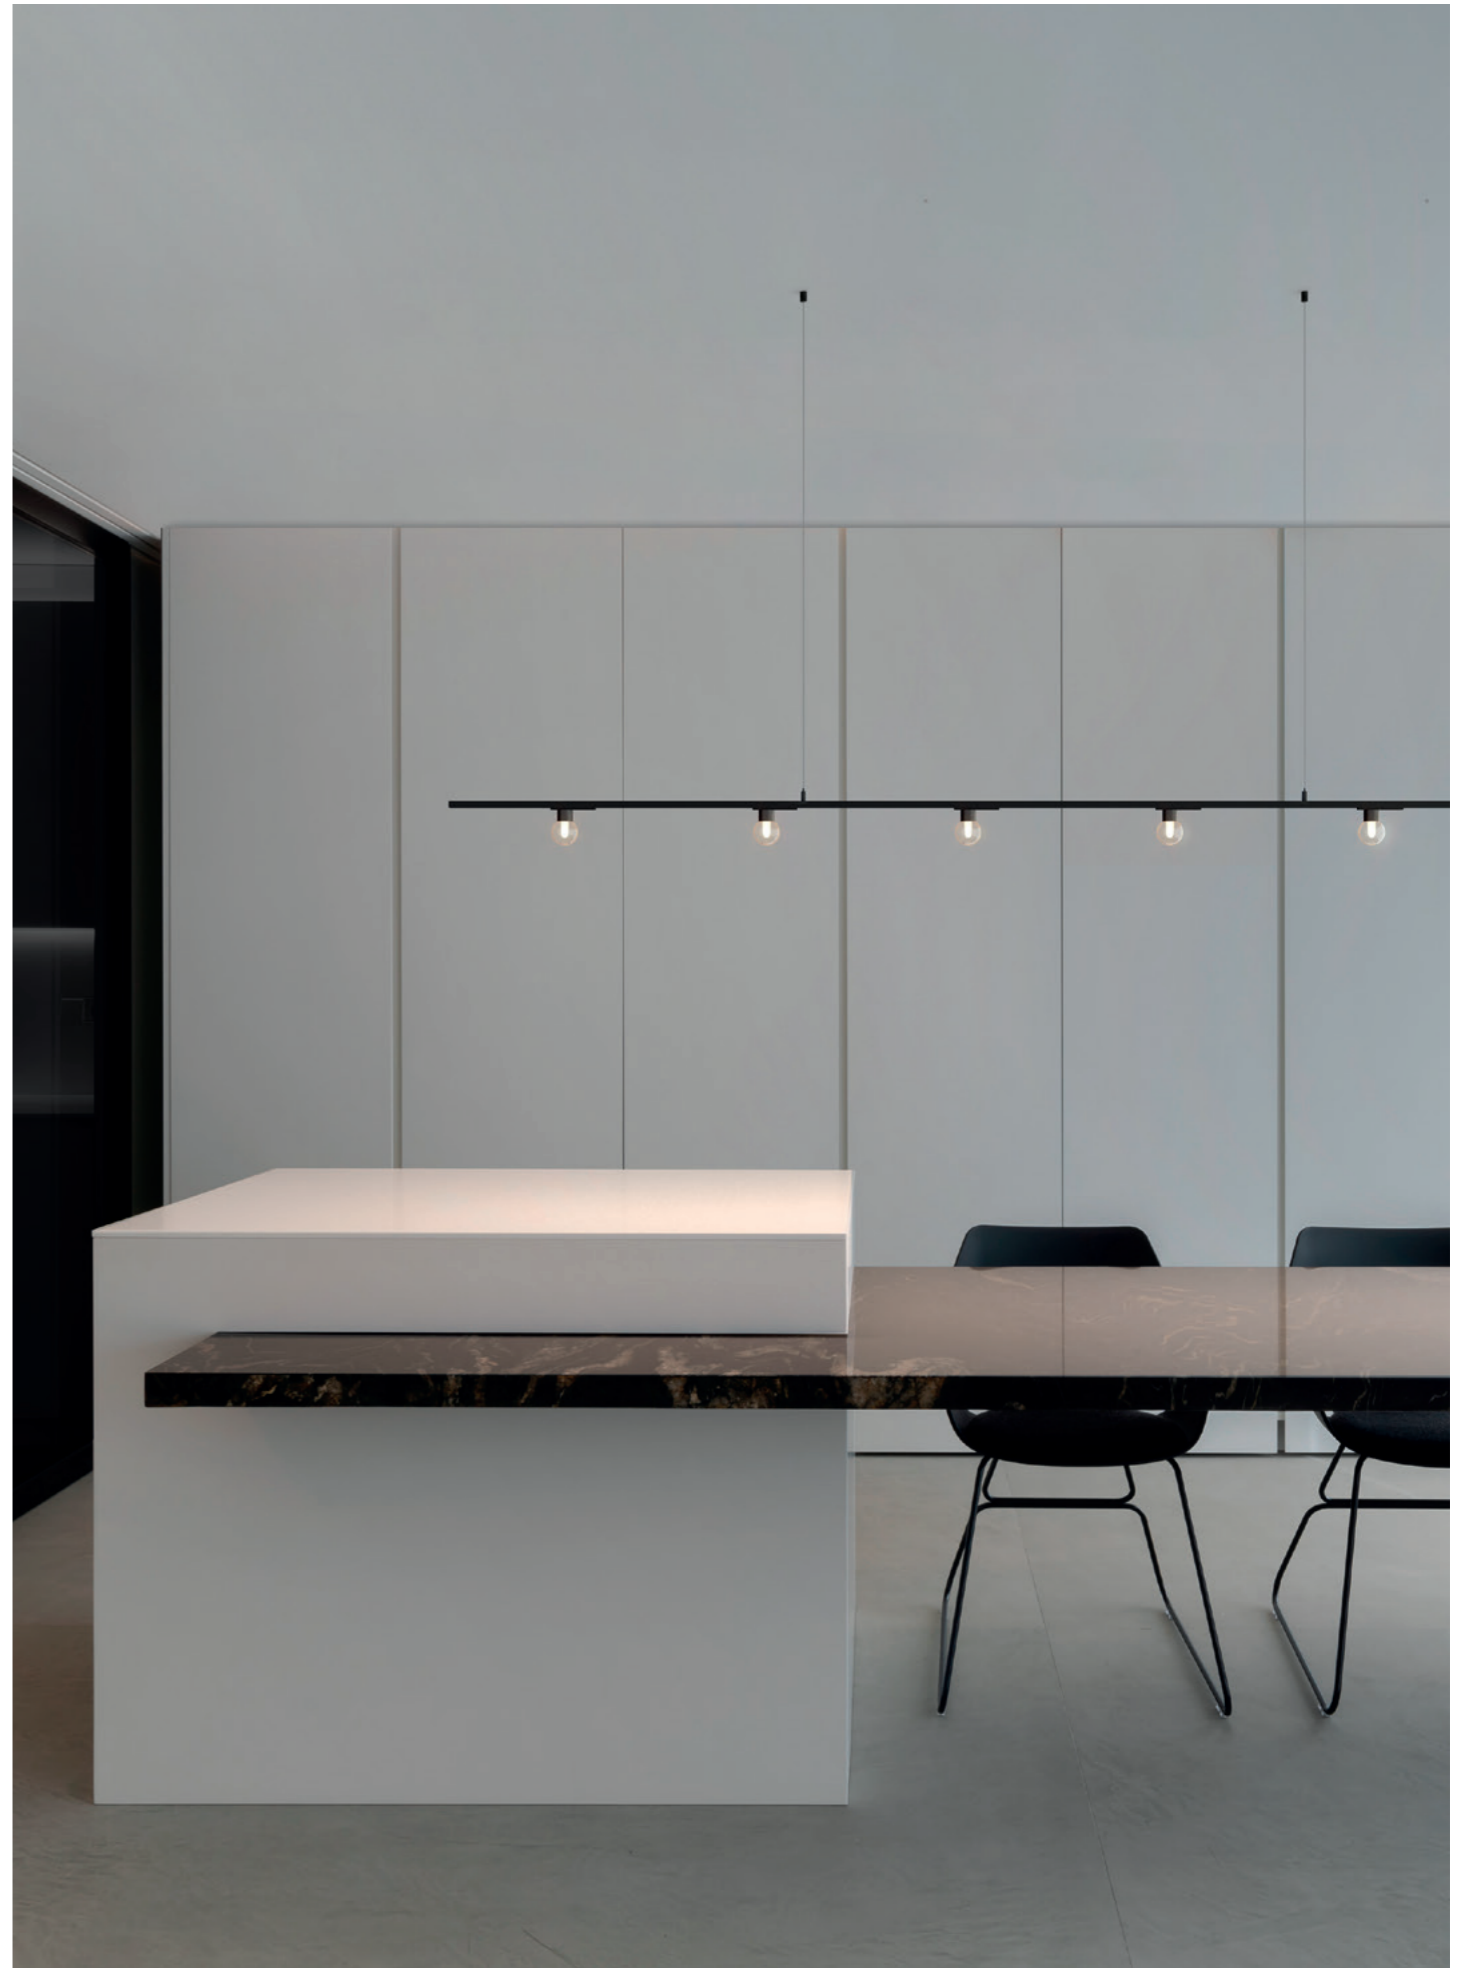

Rubén Muedra - Estudio de arquitectura | Photography: Adrián Mora Maroto




>> MORE INFO



>> MORE INFO


	P	CCT	BEAM	I	Flux	LOR		
PLUS Micro 24V	A388-00-00-	WT NT	4,7W	2700K	10°-35°	400mA	500 lm	10-17%
	A388-00-01-	WT NT	4,7W	3000K	10°-35°	400mA	520 lm	10-17%
	A388-00-02-	WT NT	4,7W	4000K	10°-35°	400mA	570 lm	10-17%

24 V | III | IP20 | CRI>90 | L80B10 >60.000h

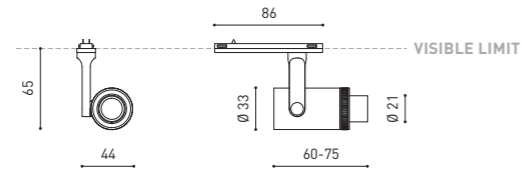

	P	CCT	BEAM	I	Flux	LOR		
SIX XS 24V	A389-00-10-	WT NT	3,5W	2700K	17°	400mA	400 lm	90%
	A389-00-11-	WT NT	3,5W	3000K	17°	400mA	420 lm	90%
	A389-00-12-	WT NT	3,5W	4000K	17°	400mA	450 lm	90%
	A389-00-20-	WT NT	3,5W	2700K	23°	400mA	400 lm	86%
	A389-00-21-	WT NT	3,5W	3000K	23°	400mA	420 lm	86%
	A389-00-22-	WT NT	3,5W	4000K	23°	400mA	450 lm	86%
	A389-00-30-	WT NT	3,5W	2700K	34°	400mA	400 lm	88%
	A389-00-31-	WT NT	3,5W	3000K	34°	400mA	420 lm	88%
	A389-00-32-	WT NT	3,5W	4000K	34°	400mA	450 lm	88%

24 V | III | IP20 | CRI>90 | L80B10 >60.000h

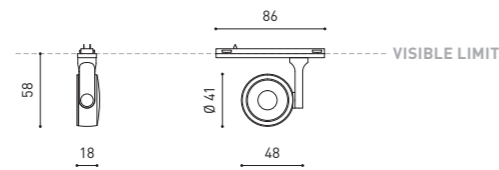

OPTIONAL

SIX High Chromatic LED ⓘ » 536
AFFECTS THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COLOUR | WT □ | NT ■ | MATERIAL | AL | OPTICAL PMMA | RAL ⓘ » 538

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC | ⓘ » PLEASE CONSULT



WALPOLE'S LEGACY

Horace Walpole's last years were lightened by the companionship of his neighbours Mary and Agnes Berry. After his death in 1797, Mary edited Walpole's complete works, including the first publication of some of his letters. His political memoirs and journals, a major source for future historians, were sealed at Walpole's request until 1810.

Strawberry Hill passed to Walpole's cousin's daughter, Anne Damer, and then to his great niece, Elizabeth Waldegrave, in whose family it remained until 1883. In 1842, the contents were dispersed in one of the most famous auctions of the century, and Walpole's name was added to the list of illustrious collectors, as he had always wished.

In the 20th century, the American scholar Wilmarth Sheldon Lewis devoted his life to researching Walpole and his times and collecting his letters, books and objects. His collection is now in the Lewis Walpole Library, Yale University. Walpole's villa is being restored by the Strawberry Hill Trust and will open to the public this year.



Informational text card for the first artwork.

Informational text card for the second artwork.

Informational text card for the third artwork.

Informational text card for the fourth artwork.


Informational text card for the fifth artwork.



>> MORE INFO

				P	CCT	BEAM	I	Flux	LOR
TOP Micro 24V	A383-00-10-	WT	NT	2,1W	2700K	19°	700mA	190 lm	90%
	A383-00-11-	WT	NT	2,1W	3000K	19°	700mA	210 lm	90%
	A383-00-20-	WT	NT	2,1W	2700K	38°	700mA	190 lm	92%
	A383-00-21-	WT	NT	2,1W	3000K	38°	700mA	210 lm	92%

24 V | IP20 | CRI>90 | L80B10 > 60.000h

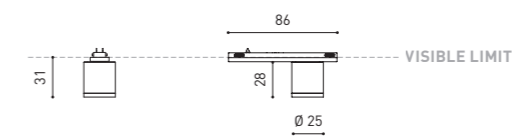


COLOUR | WT | NT |

MATERIAL | AL | PC |

RAL » 538

» PLEASE CONSULT

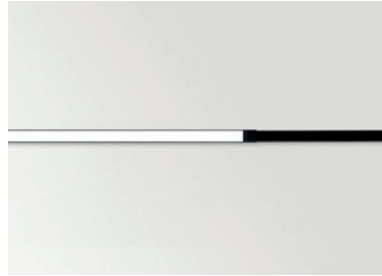


>> MORE INFO

		P	CCT	I	Flux	LOR
LINE Micro 250 24V	A395-00-00- N	2W	2700K	400mA	330 lm	52%
	A395-00-01- N	2W	3000K	400mA	340 lm	52%
LINE Micro 500 24V	A395-10-00- N	5W	2700K	400mA	820 lm	52%
	A395-10-01- N	5W	3000K	400mA	840 lm	52%
LINE Micro 1000 24V	A395-20-00- N	9W	2700K	700mA	1430 lm	52%
	A395-20-01- N	9W	3000K	700mA	1500 lm	52%

24 V | III | IP20 | CRI>90 | L80B10 >60.000h




LINE MICRO 250 24V



LINE MICRO 500 24V



LINE MICRO 1000 24V



COLOUR | N ■ | MATERIAL | AL | PC |

RAL ⓘ » 538

ⓘ » PLEASE CONSULT






Paloma Bau Studio | Photography: Germán Cabo



>> MORE INFO

		P	CCT	BEAM	I	Flux	LOR
iO Micro 24V	A387-00-10- WT NT	4,7W	2700K	20°	400mA	500 lm	88%
	A387-00-11- WT NT	4,7W	3000K	20°	400mA	520 lm	88%
	A387-00-12- WT NT	4,7W	4000K	20°	400mA	570 lm	88%
	A387-00-20- WT NT	4,7W	2700K	40°	400mA	500 lm	86%
	A387-00-21- WT NT	4,7W	3000K	40°	400mA	520 lm	86%
	A387-00-22- WT NT	4,7W	4000K	40°	400mA	570 lm	86%
	A387-00-30- WT NT	4,7W	2700K	54°	400mA	500 lm	86%
	A387-00-31- WT NT	4,7W	3000K	54°	400mA	520 lm	86%
	A387-00-32- WT NT	4,7W	4000K	54°	400mA	570 lm	86%

24 V | IP20 | CRI>90 | L80B10 >60.000h



OPTIONAL ACCESSORIES

ACCESSORIES AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY



iO Micro 24V Beam Mixer Diffuser

A387-00-00



iO Micro 24V Anti-glare Honeycomb Louver

A387-00-01- | WT | NT |

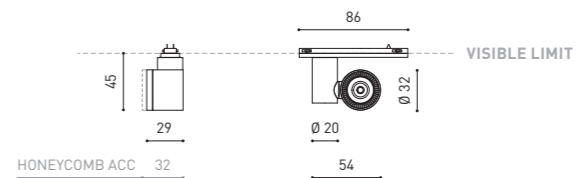

COLOUR | WT □ | NT ■ |

MATERIAL | AL | PC |

RAL ⓘ » 538

» PLEASE CONSULT




>> MORE INFO

		P	CCT	BEAM	I	Flux	LOR
FIT 20 24V	A386-00-10- WT NT G	2,1W	2700K	12°	700mA	127 lm	87%
	A386-00-11- WT NT G	2,1W	3000K	12°	700mA	150 lm	87%
	A386-00-20- WT NT G	2,1W	2700K	30°	700mA	127 lm	88%
	A386-00-21- WT NT G	2,1W	3000K	30°	700mA	150 lm	88%
	A386-00-30- WT NT G	2,1W	2700K	54°	700mA	127 lm	81%
	A386-00-31- WT NT G	2,1W	3000K	54°	700mA	150 lm	81%

24 V | III | IP20 | CRI>90 | L80B10 >50.000h



FIT 20 24V

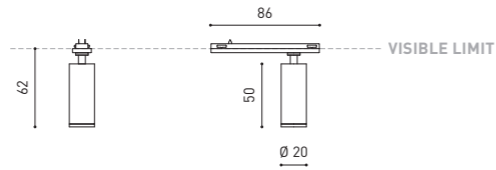


		P	CCT	BEAM	I	Flux	LOR
FIT 27 24V	A399-00-10- WT NT G	4,5W	2700K	22°	400mA	440 lm	84%
	A399-00-11- WT NT G	4,5W	3000K	22°	400mA	475 lm	84%
	A399-00-20- WT NT G	4,5W	2700K	37°	400mA	440 lm	82%
	A399-00-21- WT NT G	4,5W	3000K	37°	400mA	475 lm	82%
	A399-00-30- WT NT G	4,5W	2700K	46°	400mA	440 lm	81%
	A399-00-31- WT NT G	4,5W	3000K	46°	400mA	475 lm	81%

24 V | III | IP20 | CRI>90 | L80B10 >60.000h



FIT 27 24V

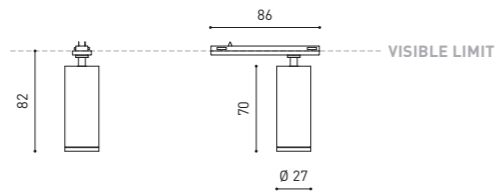

COLOUR | WT □ | NT ■ | G ■ | MATERIAL | AL | PC |

RAL ⓘ » 538

ⓘ » PLEASE CONSULT





Arkosight Showroom | Photography: Héctor Rubio - Images Positive



>> MORE INFO

					P	CCT	Beam	I	Flux	LOR
STICK 22 24V	A410-01-10-	WT	NT	MG	4,5W	2700K	22°	400mA	440 lm	84%
	A410-01-11-	WT	NT	MG	4,5W	3000K	22°	400mA	475 lm	84%
	A410-01-20-	WT	NT	MG	4,5W	2700K	37°	400mA	440 lm	82%
	A410-01-21-	WT	NT	MG	4,5W	3000K	37°	400mA	475 lm	82%
	A410-01-30-	WT	NT	MG	4,5W	2700K	46°	400mA	440 lm	81%
	A410-01-31-	WT	NT	MG	4,5W	3000K	46°	400mA	475 lm	81%


24 V | IP20 | CRI>90 | L80B10 > 60.000h



OPTIONAL ACCESSORY


CORD Accessory

0223-00-00- | N |



STICK 22 24V

STICK 22 24V + CORD ACCESSORY

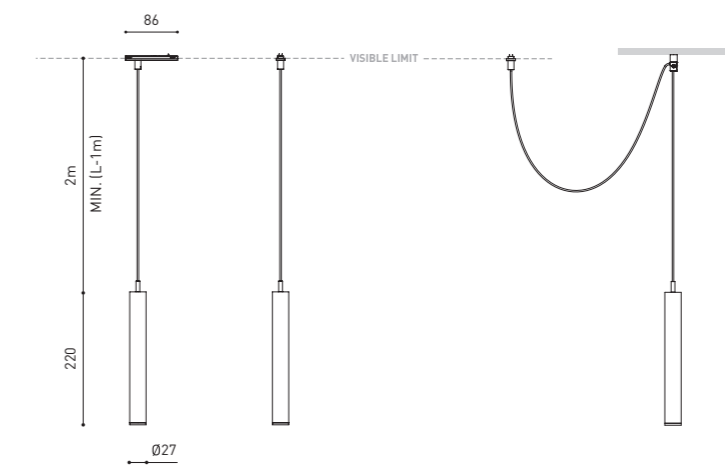

COLOUR | WT | NT | MG | N

MATERIAL | AL | ABS+PC

RAL » 538

» PLEASE CONSULT