




>> MORE INFO



>> MORE INFO


	P	CCT	BEAM	I	Flux	LOR		
PLUS Micro 24V	A388-00-00-	WT NT	4,7W	2700K	10°-35°	400mA	500 lm	10-17%
	A388-00-01-	WT NT	4,7W	3000K	10°-35°	400mA	520 lm	10-17%
	A388-00-02-	WT NT	4,7W	4000K	10°-35°	400mA	570 lm	10-17%

24 V | III | IP20 | CRI>90 | L80B10 >60.000h

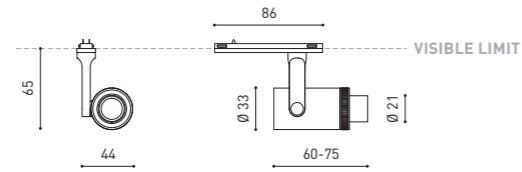

	P	CCT	BEAM	I	Flux	LOR		
SIX XS 24V	A389-00-10-	WT NT	3,5W	2700K	17°	400mA	400 lm	90%
	A389-00-11-	WT NT	3,5W	3000K	17°	400mA	420 lm	90%
	A389-00-12-	WT NT	3,5W	4000K	17°	400mA	450 lm	90%
	A389-00-20-	WT NT	3,5W	2700K	23°	400mA	400 lm	86%
	A389-00-21-	WT NT	3,5W	3000K	23°	400mA	420 lm	86%
	A389-00-22-	WT NT	3,5W	4000K	23°	400mA	450 lm	86%
	A389-00-30-	WT NT	3,5W	2700K	34°	400mA	400 lm	88%
	A389-00-31-	WT NT	3,5W	3000K	34°	400mA	420 lm	88%
	A389-00-32-	WT NT	3,5W	4000K	34°	400mA	450 lm	88%

24 V | III | IP20 | CRI>90 | L80B10 >60.000h

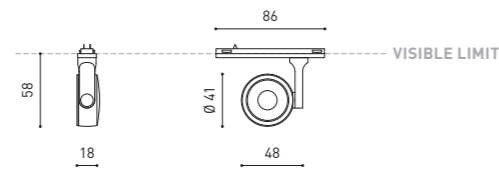

OPTIONAL

SIX High Chromatic LED ⓘ » 536
AFFECTS THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COLOUR | WT □ | NT ■ | MATERIAL | AL | OPTICAL PMMA | RAL ⓘ » 538

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC | ⓘ » PLEASE CONSULT

