




>> MORE INFO

		P	CCT	BEAM	I	Flux	LOR
FIT 20 24V	A386-00-10-   WT   NT   G	2,1W	2700K	12°	700mA	127 lm	87%
	A386-00-11-   WT   NT   G	2,1W	3000K	12°	700mA	150 lm	87%
	A386-00-20-   WT   NT   G	2,1W	2700K	30°	700mA	127 lm	88%
	A386-00-21-   WT   NT   G	2,1W	3000K	30°	700mA	150 lm	88%
	A386-00-30-   WT   NT   G	2,1W	2700K	54°	700mA	127 lm	81%
	A386-00-31-   WT   NT   G	2,1W	3000K	54°	700mA	150 lm	81%

24 V | III | IP20 | CRI>90 | L80B10 >50.000h



FIT 20 24V

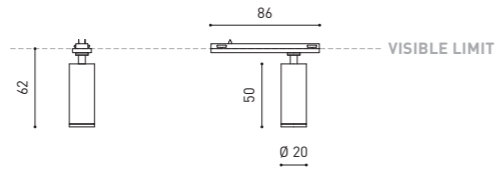


		P	CCT	BEAM	I	Flux	LOR
FIT 27 24V	A399-00-10-   WT   NT   G	4,5W	2700K	22°	400mA	440 lm	84%
	A399-00-11-   WT   NT   G	4,5W	3000K	22°	400mA	475 lm	84%
	A399-00-20-   WT   NT   G	4,5W	2700K	37°	400mA	440 lm	82%
	A399-00-21-   WT   NT   G	4,5W	3000K	37°	400mA	475 lm	82%
	A399-00-30-   WT   NT   G	4,5W	2700K	46°	400mA	440 lm	81%
	A399-00-31-   WT   NT   G	4,5W	3000K	46°	400mA	475 lm	81%

24 V | III | IP20 | CRI>90 | L80B10 >60.000h



FIT 27 24V

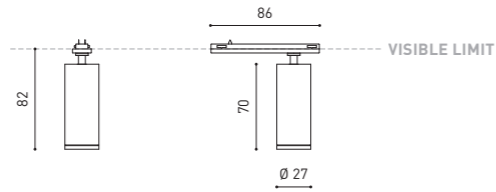

COLOUR | WT □ | NT ■ | G ■ | MATERIAL | AL | PC |

RAL ⓘ » 538

ⓘ » PLEASE CONSULT

