

LINE 1000

BLACK FOSTER MICRO 10

TOP

iO

FIT

PLUS

SIX

ZEN TUBE

SPIN

HOLLY



STICK 44

Track 48V

TRIMLESS · SURFACE · SURFACE SHORT · SUSPENSION

LINE 48V	BLACK FOSTER MICRO 48V	TOP 48V	iO 48V	FIT 48V	PLUS 48V	SIX 48V	ZEN TUBE 48V	SPIN 48V	HOLLY 48V	STICK 48V
—	—	—	—	—	—	—	—	—	—	—
500 / 1000 / 2000	5 / 10	TOP MINI / TOP		20 / 35 / 50	PLUS MINI / PLUS	XS / S / M / L				22 / 44 / 66
10,5 / 21 / 42 W	7 / 14 W	6,5 W	4,5 W	2,1 - 12 W	6,5 / 18 W	4,5 - 24,5 W	12 / 17 / 23 W	6,5 W	2,1 W	5,6 W
2700 / 3000 / 4000 K	2700 / 3000 / 4000 K	2700 / 3000 K	2700 / 3000 K	2700 / 3000 / 4000 K	2700 / 3000 / 4000 K	2700 / 3000 / 4000 K	2700 / 3000 K	2700 / 3000 K	2700 / 3000 K	2700 / 3000 K
1500 / 6600 Lm	775 / 1700 Lm	610 / 640 Lm	485 / 505 Lm	127 - 1230 Lm	630 - 2030 Lm	470 - 3000 Lm	1580 - 3190 Lm	600 / 630 Lm	190 / 210 Lm	530 / 600 Lm
98° BEAM	37° BEAM	20 / 30 / 56° BEAM	20 / 30 / 56° BEAM	12 - 54° BEAM	10 - 41° / 12 - 51° BEAM	17 - 38° BEAM	16 / 24 / 42° BEAM	24 / 40° BEAM	19 / 38° BEAM	22 / 37 / 46° BEAM
43% LOR	87% LOR	86 - 92 % LOR	86 - 92 % LOR	80 - 88 % LOR	20 - 40 % LOR	84 - 93 % LOR	90% LOR	84 / 86 % LOR	90 / 92 % LOR	81 - 84 % LOR

TRACK 48V




TRACK 48V TRIMLESS

TRACK 48V TRIMLESS 1m	A338-01-00- N WT
TRACK 48V TRIMLESS 2m	A338-02-00- N WT
TRACK 48V TRIMLESS 3m	A338-03-00- N WT
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00- N WT
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00- N WT

PLASTERBOARD CEILING, MANDATORY THICKNESS 12,5mm.
RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE
INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING.




TRACK 48V TRIMLESS Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE


TRACK 48V SURFACE 1m	A338-11-00- NT WT
TRACK 48V SURFACE 2m	A338-12-00- NT WT
TRACK 48V SURFACE 3m	A338-13-00- NT WT
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00- NT WT



TRACK 48V SURFACE Corner 90° One Plane



Electrical connection not included
Straight joiner included




TRACK 48V SURFACE SHORT


TRACK 48V SURFACE SHORT 1m	A338-21-00- NT WT
TRACK 48V SURFACE SHORT 2m	A338-22-00- NT WT
TRACK 48V SURFACE SHORT 3m	A338-23-00- NT WT
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00- NT WT



TRACK 48V SURFACE SHORT Corner 90° One Plane




Electrical connection not included
Straight joiner included



	P	V
CONSTANT VOLTAGE LED POWER SUPPLY	0434-01-62	150W 48V

220-240 V~ | DRIVER MUST BE PLACED ON REMOTE

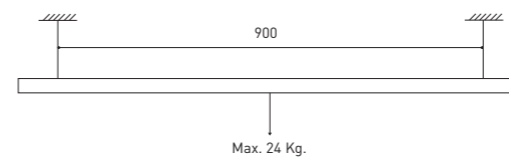


DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm ²)	CABLE LENGTH (m)			
		5	10	20	30
150	0,75	40	15	X	X
	1,5	50	40	20	X

ACCESSORIES

TRACK 48V


ALL 48V TRACKS

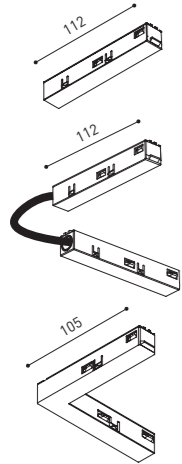

TRACK 48V Live-End Connector
A338-00-01- | N | W |

TRACK 48V Corner Connector
A338-00-12- | N | W |


TRACK 48V Corner 90° Connector One Plane
A338-00-24- | N | W |
*Not suitable for trimless version



TRACK 48V Central Connector
A338-00-02- | N | W |

TRACK 48V Wireless Control
0434-01-31- | N | W | Casambi/AAG Stucchi App

TRIMLESS 48V

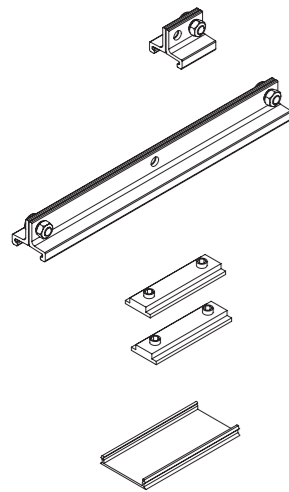


TRACK 48V TRIMLESS Short T-Bracket
A338-00-03

TRACK 48V TRIMLESS Long T-Bracket
A338-00-04

TRACK 48V TRIMLESS Straight Joiners (2 units)
A338-00-05- | N | WT |

TRACK 48V TRIMLESS Plaster Installation Guard 1m
A338-00-21




TRACK 48V TRIMLESS Suspension Kit
A338-00-08
*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**
1000mm - 2 Pcs.
2000mm - 2 Pcs.
3000mm - 3 Pcs.




TRACK 48V TRIMLESS Clamp for M6 ROD
A338-00-09
*See accessories quantities



TRACK 48V TRIMLESS Track Clamp
A338-00-10
*See accessories quantities

SURFACE, SUSPENSION, SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner
A338-00-11


COLOUR | N ■ | W □ | NT ■ | WT □ |

RAL ⓘ » 538


ACCESSORIES

TRACK 48V

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V SURFACE Suspension Kit (2 units)
A338-00-15- | NT | WT |




TRACK 48V SURFACE Suspension Feed Kit
A338-00-16- | N | W | NO DIM
A338-00-17- | N | W | DIM
*For remote power supply

TRACK 48V Wired Power Supply Case
A338-00-25- | NT | WT | 150W NO DIM
A338-00-26- | NT | WT | 150W DIM

220 V~
240 V~
INCL

SURFACE & SURFACE SHORT 48V



TRACK 48V Power Supply Case

A338-00-29- | NT | WT | 150W

220 V~
240 V~
INCL
*To be installed aside 48V Surface Tracks

WIRE TRIMLESS ACCESSORIES

FEED

Mains Trimless*


A023-00-01- | W | N | NO DIM

Mains Thick Trimless*


A023-00-02- | W | N | DIM




MAINS TRIMLESS



MAINS THICK TRIMLESS



STEEL CABLE TRIMLESS



FASTENING

Steel Cable Trimless*

A023-00-05- | W | N |



COLOUR | N ■ | W □ | NT ■ | WT □ |

* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | NT | WT |

TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | NT | WT |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End

A338-00-18- | NT | WT |

TRACK 48V SURFACE SHORT End Feed

A338-00-19- | NT | WT |

RAL ⓘ » 538