WALL SPOUT AND MIXER

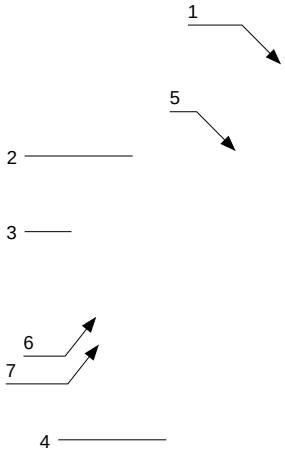

1. Body
2. Back plate
3. Spout
4. Handle
5. O-ring
6. Screw
7. Decor knob

INSTALLATION INSTRUCTIONS

1. Fix the body of the mixer to a suitable xing plate or noggin. Ensure the mixer is level and will have enough of the body exposed to install the plate (part 2) and spout (part 3).

2. Install the hot (Bottom) and cold (Right) water connections. Once all of the ttings have been tighten, check for leaks and correct operation of the mixer.

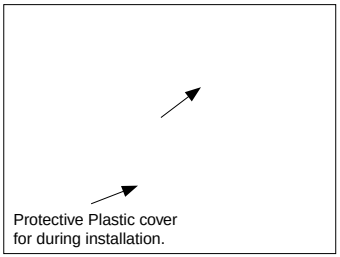

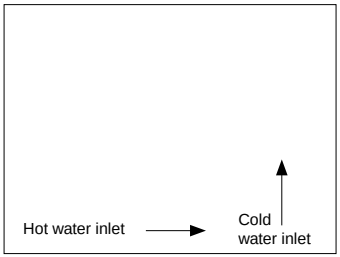

3. Remove the protective covers and carefully slide the back plate (part 2) over the mixer and spout bodies until it is rm against the wall (it is recommended to apply a clear sealant behind the back plate to ensure water cannot run behind the plate).

4. Fit the handle (part 4) and spout (part 3) ensuring they are secured correctly (the spout has two grub screws which need to be tightened at the same time in sequence) failure to follow this step can result in the spout not lining up.

WALL SET

(CONCEALED SHOWER/BASIN/BATH
BREECH ASSEMBLY SHOWN IS SOLD SEPARATELY)

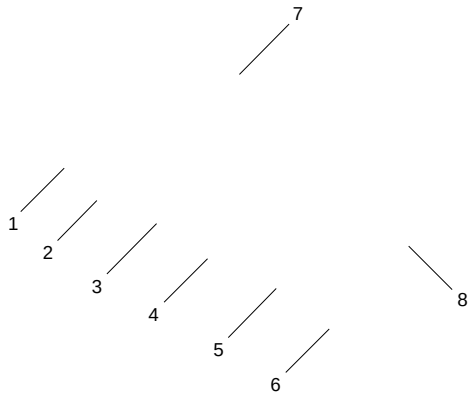

1. Hot cartridge spindle
2. Fibre washer
3. Locking nut
4. Back plate
5. Fixing nut
6. Handle
7. Cold cartridge
8. Spout

INSTALLATION INSTRUCTIONS

1. (A Typical Installation) Fix the concealed assembly to a suitable xing plate or noggin. Ensure the assembly is nished level with surface face as per the below diagram.

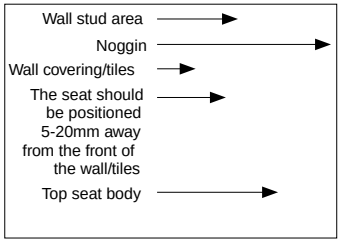

2. Install the hot (bottom left) and cold (bottom right) water connections. Once all the ttings have been tightened, check for leaks and correct operation of the assembly.

3. Now install the wall tops and insert a 1/2-inch male BSP threaded pipe into the center outlet using threaded tape or plumbers tape (not provided) ensuring all the ttings are tight and tested for leaks and operation. Apply clear sealant if required.

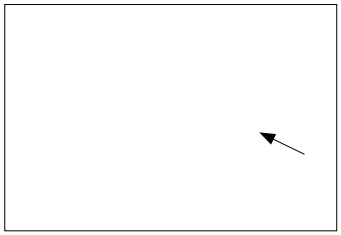

4. Fit the handles, plates and spout ensuring they are secured correctly, as per their individual installation guides.



BASIN SET / HOB SET

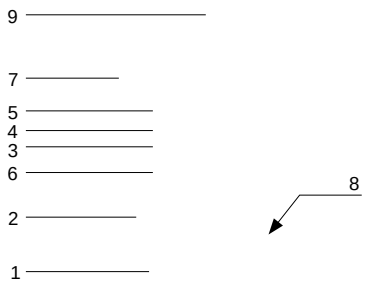

1. Hot cartridge
2. Back plate
3. Connector
4. Fibre washer
5. Screw
6. Fixing nut
7. Handle
8. Cold cartridge
9. Spout

INSTALLATION INSTRUCTIONS

1. Disassemble the handle, back plate, locking nut and bre washer from the spindle. Install the supplied breech assembly under the basin and install the spindle into the breach seat and ensure the spindle sits tightly and correctly.

2. Install the bre washer then locking nut back onto the spindle and tighten. Slide the cover plate and xing nut over the spindle and hand tighten.

3. Install the handles and tighten the grub screw (ensure the spindles are turned to the o position and the handles are aligned correctly before tightening the grub screw).

4. Position the spout to the center of the hole and mount to assembly breech. Tighten all ttings and test for leaks.

SPOUT

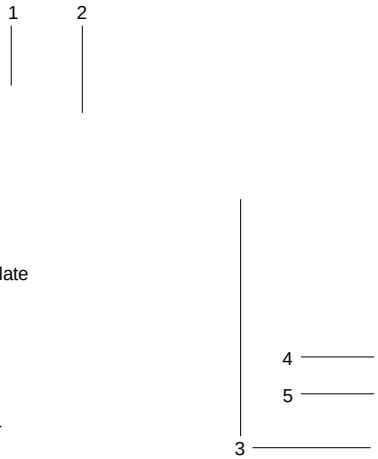

1. Back plate
2. O-ring
3. Spout
4. O-ring
5. Aerator

INSTALLATION INSTRUCTIONS

1. Apply thread tape to the exposed G1/2” BSP thread, ensure the back plate (part 2) is installed on the body of the spout before screwing the spout clockwise (by hand) onto the G1/2” BSP thread (the spout should nish up tight against the nished surface).

   Test for leaks and correct operation of the spout.

   Push the back plate rmly against the nished surface. (It is recommended to apply a small amount of clear sealant to the back of the plate or spout to ensure water cannot run behind.

   IMPORTANT: No tools are to be applied directly to the spout.

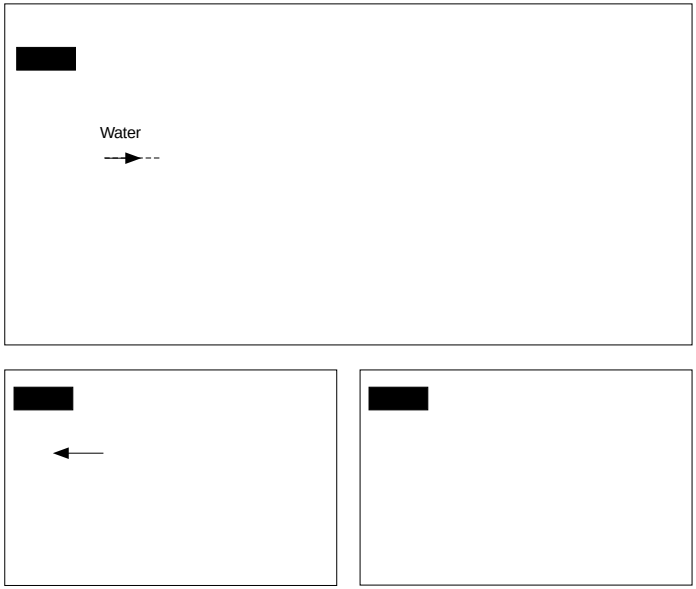

WASHING MACHINE STOPS

1. Body
2. Cover plates

2

1

INSTALLATION INSTRUCTIONS

1. Install the cover plates over the G1/2” BSP pipes.

2. Screw the tap body onto the G1/2” BSP thread and ensure the outlet is facing down (it is recommended to apply threaded tape before installation) Do not over-tighten.



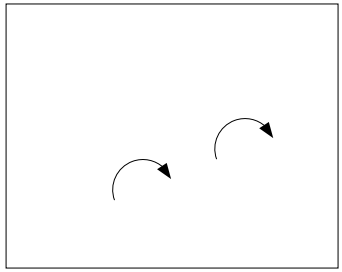

ROUND WALL TAPS

1. Cartridge (Hot)
2. Fiber Washer
3. Lock Nut
4. O-ring
5. Base plate
6. Connector
7. Screw
8. Handle
9. Button
10. Screw
11. Cartridge (Cold)

11 2 3

1 2 3 4 5 6 7 8 9 10

INSTALLATION INSTRUCTIONS

1. Before installation please take note of the installation tolerances, as well as the turning directions of the H and C cartridges.

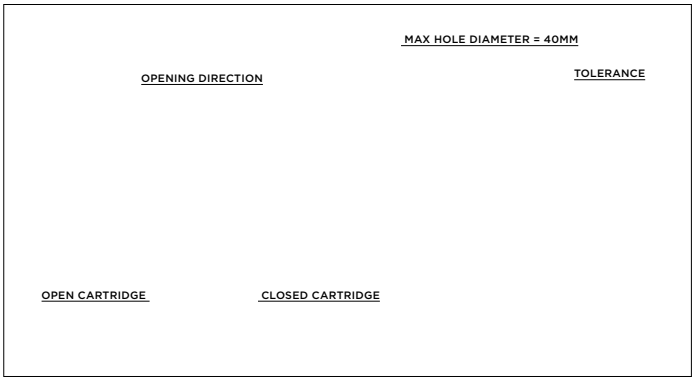

2. Separate the lock nut from the cartridge. Install the cartridge tightly into the breech in the wall, then fasten the lock nut tightly over the cartridge. Screw the base plate over the lock nut, against the wall surface nish.

INSTALLATION INSTRUCTIONS (CONTINUED)

3. Measure from the surface of the back plate and cut the lock nut and the spindle to the same lengths.



4. Screw the handle connector in place, then fasten the handle. Orientate the handle correctly to show the ‘H’ and ‘C’ in the bottom position when the cartridge is closed.

FREESTANDING BATH SPOUT

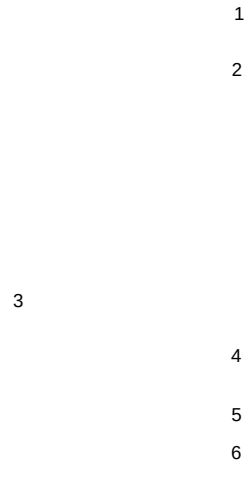

1. Aerator
2. Spout
3. Screw
4. O-ring
5. Back plate
6. O-ring
7. Base plate

INSTALLATION INSTRUCTIONS

1. Screw the base to the water outlet tightly and then fasten the oor bolts.



2. Slide the cover plate onto the spout from the bottom before fastening the spout to the base.

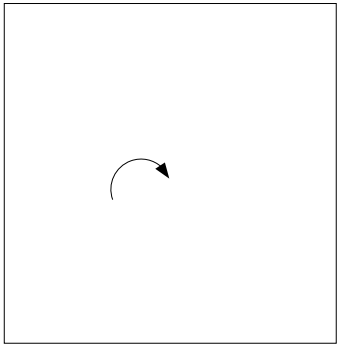

3. Position the spout outlet over the bath before tightening the grub screw.



4. Slide the cover plate down over the base plate once the oor bolts have been tightened.



CLEANING

- Do not install the tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to the product.
- Never use detergents, acidic based, or abrasive cleaners and do not use undue pressure.
- A soft cloth can be used to remove surface dust. Alternatively, wipe with warm soapy water to ensure the nish remains in a superior condition for continued use.
- The use of wax-based furniture products should be avoided. These can result in a build-up of deposits that can detract from the appearance of the product.