

Nydree
FLOORING

A STRONGER AND SMARTER WOOD FLOOR



Featuring technology by
woodura®

TROUBLE-FREE WOOD FLOORS

Experience the next-level performance and style of Nydree's Maverick Collection, featuring award-winning Woodura® surface technology. With outstanding impact and wear resistance, these easily installed floors are suitable for hotel guest rooms, condominiums, apartments, senior living facilities, corporate office spaces and more. Own a wood floor built on the strength, durability and design you've come to expect from Nydree, with the value and fast installation of every product in the Maverick Collection.





MAVERICK COLLECTION IN VIENNA

MULTI-USE FOR MULTI-FAMILY



Multi-family properties take on multi-challenges—Woodura makes sure your floor stands up to the test, with superior hardness for unmatched durability. Installation is fast and easy, since no adhesive is required. For added moisture resistance and sound absorption, use Maverick Underlayment as your base.



GIVE CHARACTER TO YOUR ROOM

Woodura enhances the unique character of wood by combining different wood sheet qualities with powder mixes in different colors. After pressing, flooring products with Woodura undergo a surface treatment. The result adds further design possibilities to truly reflect one's individual taste.



MAKE THE BEST USE OF NATURE

In addition to its technological advantages, Woodura is also a sustainable way to bring real wood interior design into our homes. By using thin wood sheets instead of solid wood, 10 times more flooring can be produced from the same amount of lumber compared to traditional engineered wood flooring.



FACTORY FINISHED

Our factory commercial urethane finish products are the best choice when you want beautiful wood flooring combined with minimum maintenance. They are easy to clean and scratch resistant, and need no refinishing.

MAVERICK COLLECTION IN ASH




KESWICK
Wood: OAK



VIENNA
Wood: OAK



IVY
Wood: OAK




BRIDGEWATER
Wood: OAK



ROANOKE
Wood: OAK



HARRISONBURG
Wood: OAK



RICHMOND
Wood: OAK



WAYNESBORO
Wood: ASH



LEXINGTON
Wood: ASH



LYNCHBURG
Wood: WALNUT



ARLINGTON
Wood: WALNUT

AVAILABLE FORMATS

Specs: Length: 86.61" (2200mm) and Width: 8.25" (210mm)
Thickness: 11.2 mm
Click system: 5G® Fold Down locking system


HARD TO DENT, EASY TO INSTALL

With the 5G® installation system on the short side, these long and wide planks can be installed much more easily and at a fraction of the time compared to other traditional installation methods. Simply fold the planks down and click them into place.



PRODUCT CONSTRUCTION & GENERAL INFORMATION

The Woodura® surface is based on fusing a thin sheet of wood with a wood fiber core through a powder mix layer. The powder mix perfectly fills up the natural openings of the wood and enhances the wood’s appearance. Moreover, it eliminates the need for putty operations and creates a stronger surface with a hardness significantly greater than a traditional solid oak layer.

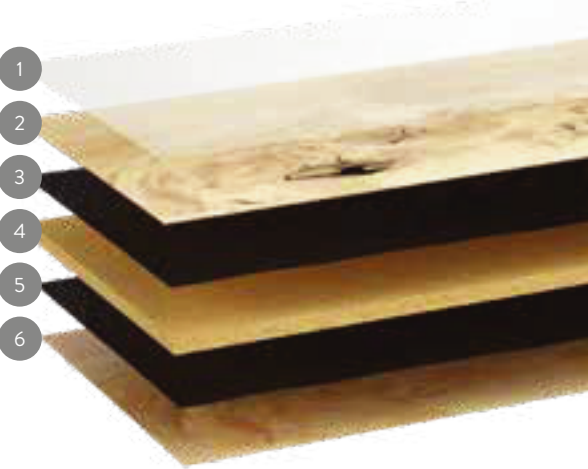

- 1. UV-CURED URETHANE
- 2. REAL WOOD COVERING
- 3. WOOD-BASED POWDER LAYER
- 4. HIGH-QUALITY, MOISTURE-RESISTANT, HIGH-DENSITY FIBERBOARD
- 5. WOOD-BASED POWDER LAYER
- 6. SPRUCE VENEER BACKING LAYER



REACTION TO FIRE
Standard: EN 13 501
Bfl-s1 (hardly flammable)



FORMALDEHYDE EMISSIONS E1
Standard: EN 717-1
≤ 0.05 ppm



CLEANING
For removal of dirt and grime, it is recommended to clean the floors with Nydree Natural Cleaner.



CUTTING INSTRUCTIONS
For cutting of the floor panels, hardened steel cutting tools or diamond-tipped sawblades are recommended.



THERMAL CONDUCTIVITY
Suitable for hot-water underfloor heating. Standard foil heating systems are generally not recommended. (Exception: self-regulating heating systems that maintain a 26°C surface temperature.)

PRODUCT THICKNESS
11.3 mm (0.445")

WIDTH AND LENGTH
206 x 2200 mm
(8.11" x 86.61")

AREA OF APPLICATION
Woodura flooring products are suitable for all living areas as well as for commercial areas with normal wear, e.g., offices, waiting rooms, boutiques, etc. The flooring is not suitable for installation in humid rooms (bathrooms, saunas, etc.).

INSTALLATION
The substrate must be dry, even, firm and clean. Any unevenness of 3 mm per 2 meters must be evened. The installation instructions provided with the product must be observed.

For detailed instructions, visit www.nydreeflooring.com/technical

| | Oak | Woodura |
|-----------------------|-----|---------|
| Brinell hardness (HB) | 3.7 | 10.0 |

| | Class 34 laminate | Woodura |
|------------------------------|-------------------|---------|
| Thickness swelling (%) | 8.0 | 6.6 |
| Impact resistance (big ball) | ≥ 1,600 | ≥ 1,600 |



Innovating Every Day

Innovation is at the heart of Nydree Flooring. From the earliest days in the 1960s until today, Nydree has been committed to raising the bar in the hardwood flooring industry. From our signature acrylic infusion process to the latest Woodura technology, we continue to lead the way by offering professionals unparalleled real wood products and world-class service.

Nydree
FLOORING



Featuring technology by
woodura®



www.nydreeflooring.com

The Woodura® word mark and logo are registered trademarks of Välinge Innovation AB for a reinforced wood surface based on powder technology.