

USE

Commercial and Residential flooring installations.

RECOMMENDED INSTALLATION

Glue-down over concrete or approved underlayment/subfloor. Suitable for commercial installations on any grade level, provided the moisture requirements of Nydree SB1587 installation adhesive are met.



ENGINEERED CONSTRUCTION


WEAR LAYER	Acrylic-infused genuine hardwood. All wear layers are sawn cut. Laminated at 1/10" (2.54mm).
ACTUAL WEAR LAYER THICKNESS	1/12" (2mm).
PLYWOOD PLATFORM FOR NYDREE COLLECTION	9mm (0.354") multi-ply hardwood (CARB P2 compliant).
	Wide Plank Series uses 12mm (0.472") multi-ply hardwood (CARB P2 compliant).
	Laminating adhesive contains no formaldehyde (wear layer to plywood).

NYDREE COLLECTION DIMENSIONS

WIDTHS	2 2/3" (67.6mm), 4" (101.6mm) and 5 1/4" (133.4mm).
ACCENT STRIPS	Available in 1/2", 1", and 1.5" widths (12.7mm, 25.4mm, and 38.1mm).
NOMINAL THICKNESS FOR ALL WIDTHS	7/16"
ACTUAL THICKNESS	0.430" (10.92mm)
LENGTHS	12" to 47" random (304.8 to 1193.8mm).
FIXED-LENGTH, DOUBLE-END GROOVED FOR HERRINGBONE AND PATTERN INSTALLATIONS	Available in lengths from 14" to 46".
FIXED-LENGTH, DOUBLE-END GROOVED FOR 45° CHEVRON INSTALLATIONS	See price list for available lengths.
PROFILE	Tongue-and-groove sides and ends with micro-beveled edges. Fixed-length planks are double-ended grooved.
	Custom thickness and width are available upon request.
	Laminating adhesive contains no formaldehyde (wear layer to plywood).

WIDE PLANK SERIES DIMENSIONS

WIDTH	7.5" (190.5mm).
NOMINAL THICKNESS	9/16".
ACTUAL THICKNESS	0.540" (13.72mm).
LENGTHS	18" to 95" random (457.2 to 2413mm).
FIXED-LENGTH, DOUBLE-END GROOVED FOR HERRINGBONE AND PATTERN INSTALLATIONS	Available in lengths from 14" to 46".
FIXED-LENGTH, DOUBLE-END GROOVED FOR 45° CHEVRON INSTALLATIONS	See price list for available lengths.

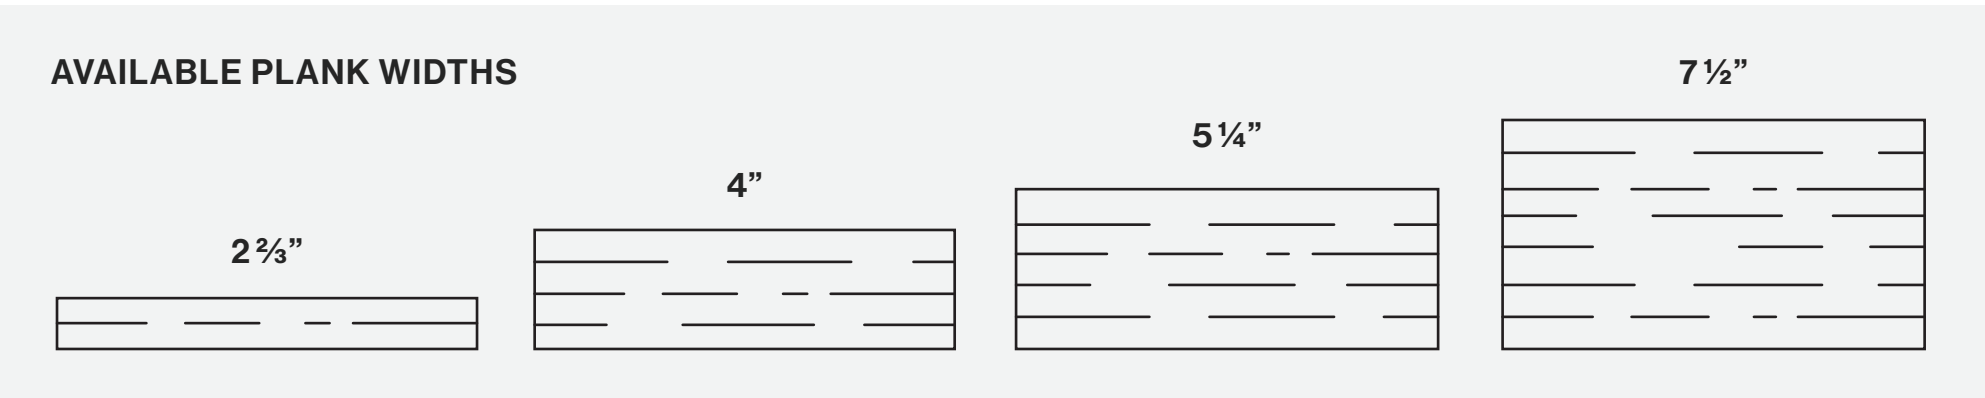

Available as Red List Free (Zero Collection)