

# Line 43 Dark Optics

**EN** This Dark Optics 43 mm linear luminaire's design focuses on a highly effective optical system that provides glare-free direct and indirect light. Line 43 conveys a pleasing aesthetic balance while the colored lenses create attractive accents and a pleasant atmosphere. The luminaire has interchangeable black, white, silver, and gold reflectors. The construction of this profile-type of the luminaire allows the creation of a length of over three meters straight form. The high quality of craft and the excellent light characteristics of this lamp make it ideal for use in office spaces allowing the implementation of unique lighting concepts.

**DE** Das Design dieser Dark Optics 43 mm Langfeldleuchte konzentriert sich auf ein hocheffektives optisches System, das für blendfreies direktes und indirektes Licht sorgt. Line 43 vermittelt eine angenehme ästhetische Ausgewogenheit, während die farbigen Reflektoren attraktive Akzente und eine angenehme Atmosphäre schaffen. Die Leuchte hat austauschbare schwarze, weiße, silberne und goldene Reflektoren. Die Konstruktion dieses Profiltyps der Leuchte ermöglicht die Schaffung einer Länge von über drei Metern in gerader Form. Die hohe Verarbeitungsqualität und die hervorragenden Lichteigenschaften dieser Leuchte prädestinieren sie für den Einsatz in Büroräumen und ermöglichen die Umsetzung einzigartiger Beleuchtungskonzepte.

## Create my unique code!


72+□ - ■ - ~ - ▲ - ○ - ☆ - \*

## Example

Line 43 Dark Optics	dark optic 80°	standard power	3000K	reflector black matte
↑	↑	↑	↑	↑
72	1	3 - 08	- 2 - 8 - 3	- 01 - 01
↓	↓	↓	↓	↓
surface	size 576 mm	DALI	housing black 9005	


size		↓light	system power standard	luminous flux 4000K, 80° white
576 mm	■ 08	2 ft	↓9.8W	↓1156lm
856 mm	■ 12	3 ft	↓14.7W	↓1734lm
1136 mm	■ 16	4 ft	↓19.6W	↓2312lm
1416 mm	■ 20	5 ft	↓24.5W	↓2890lm
1696 mm	■ 24	6 ft	↓29.4W	↓3468lm
1976 mm	■ 28	7 ft	↓34.3W	↓4046lm
2256 mm	■ 32	8 ft	↓39.2W	↓4624lm
2536 mm	■ 36	9 ft	↓44.1W	↓5202lm
2816 mm	■ 40	10ft	↓49W	↓5780lm
3096 mm	■ 40	11ft	↓53.9W	↓6358lm
3376 mm	■ 48	12ft	↓58.8W	↓6936lm

## Technical information



UGR	<19	
lighting power	low	~ 1
	standard	~ 2
	high	~ 3
mounting type	surface	+ 1
	pendant	+ 2
	pendant up & down	+ 5
light distribution - down	80° / 50° / 35° / wall washer	
luminous efficiency	LO 123lm/W / ST 117lm/W / HI 112lm/W (80°)*	
	LO 119lm/W / ST 114lm/W / HI 108lm/W (50°)*	
electrical control	ON / OFF	▲ 9
	DALI	▲ 8
color temperature	3000K	● 3
	4000K	● 4
	on request: TUNABLE WHITE	● 9
housing color	black 9005	● 01
	white 9010	● 02
	on request: RAL color palette	● 99
reflector color	black matte	* 01
	white matte	* 02
	silver matte	* 04
	on request: gold matte	* 05
	dark optics	dark optic 80°
	dark optic 50°	■ 4
	dark optic 35°	■ 5
	wall washer	■ 7
	blind cover	■ 9

\* Photometric data: 4 ft, 4000K, CRI 90, white reflector

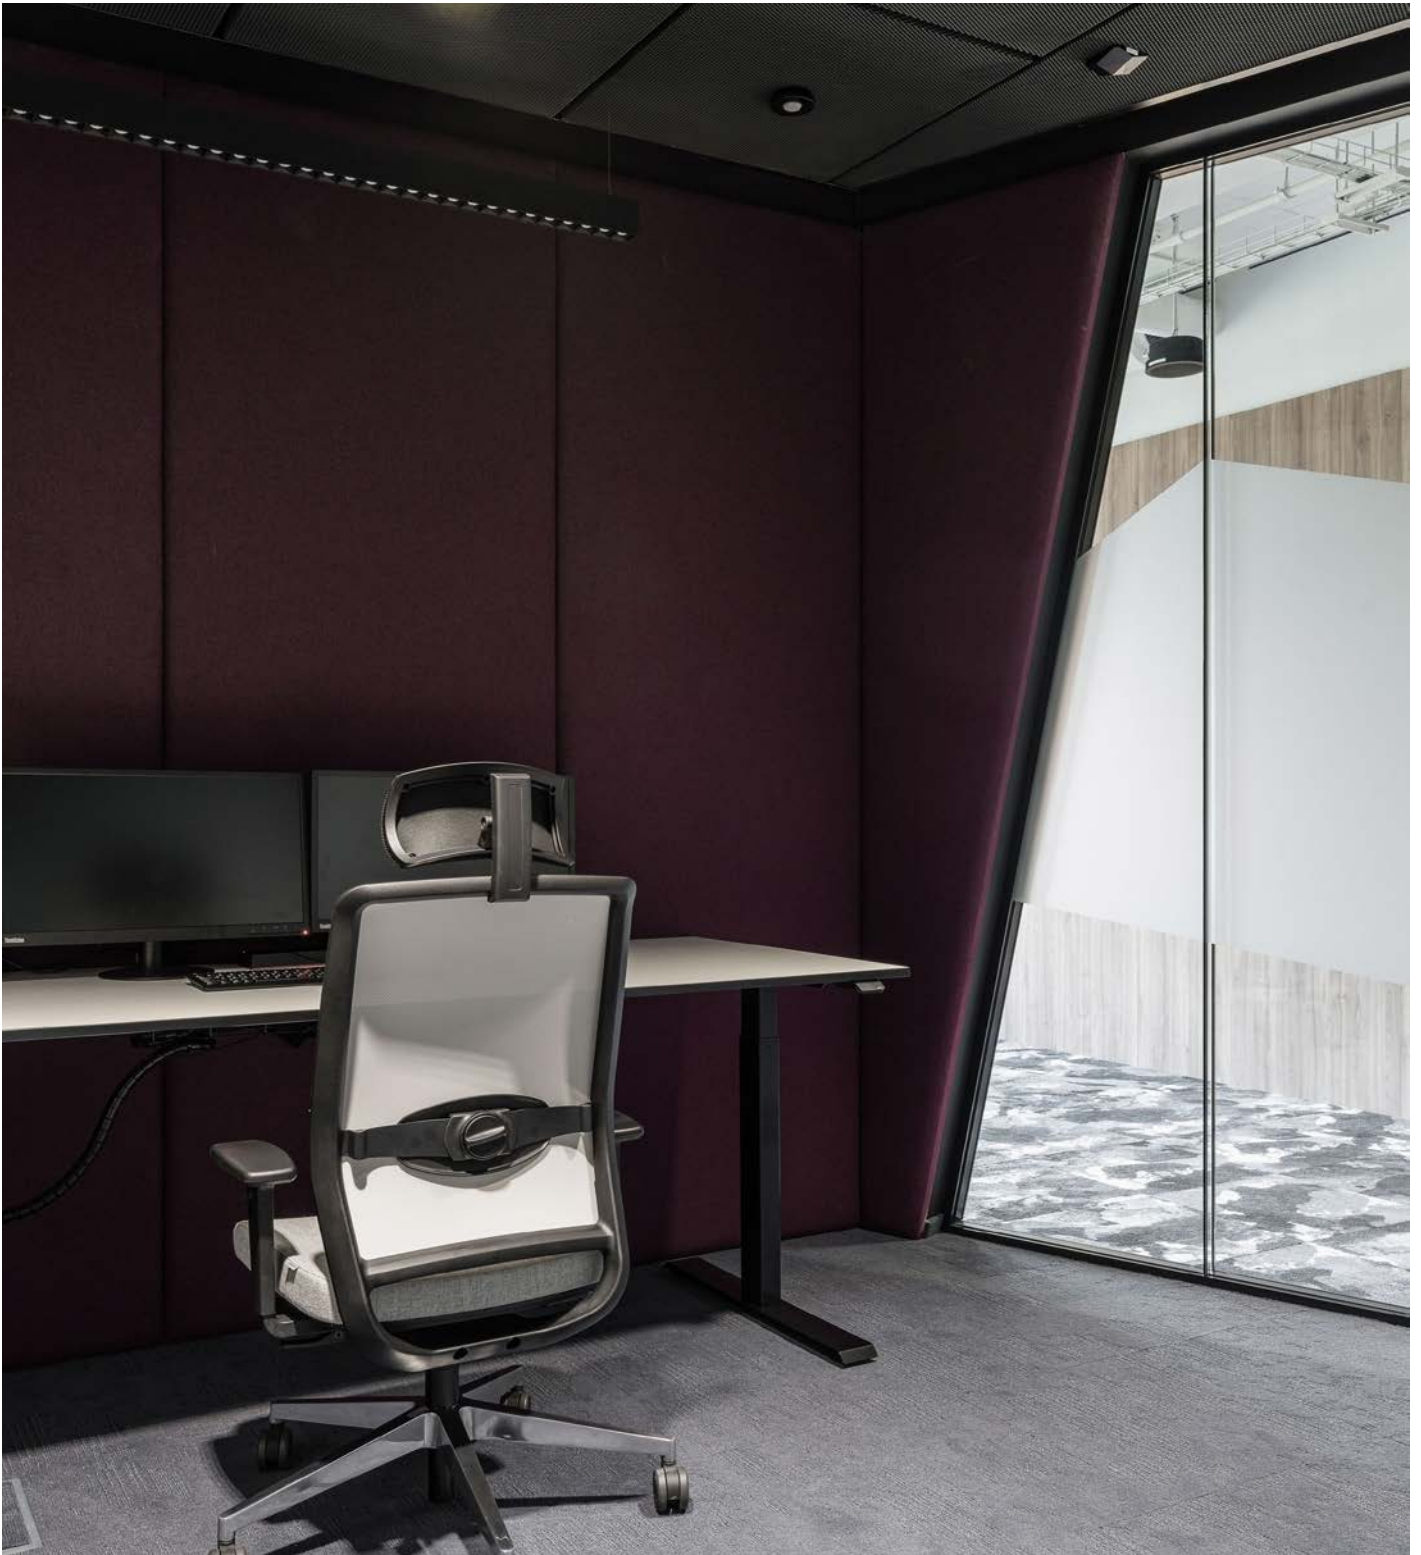

**TECHNIP** THE DESIGN GROUP

Light distribution down:  
A = min 2 ft, max 12 ft

Light distribution up:  
B = A - 1 ft

