

CRASH

Color Body Porcelain

ARCHITECTURAL
CERAMICS



WHITE




24x24 White




12x24 White



6x24 White



4x24 White

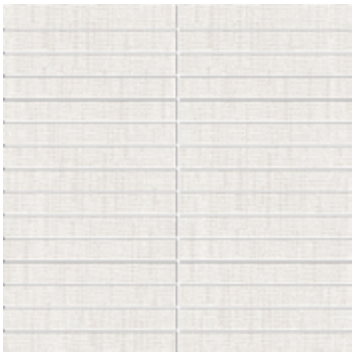

1x6 White Mosaic

ECRU



24x24 Ecrú



12x24 Ecrú



6x24 Ecrú




4x24 Ecrú



1x6 Ecrú Mosaic


GREY

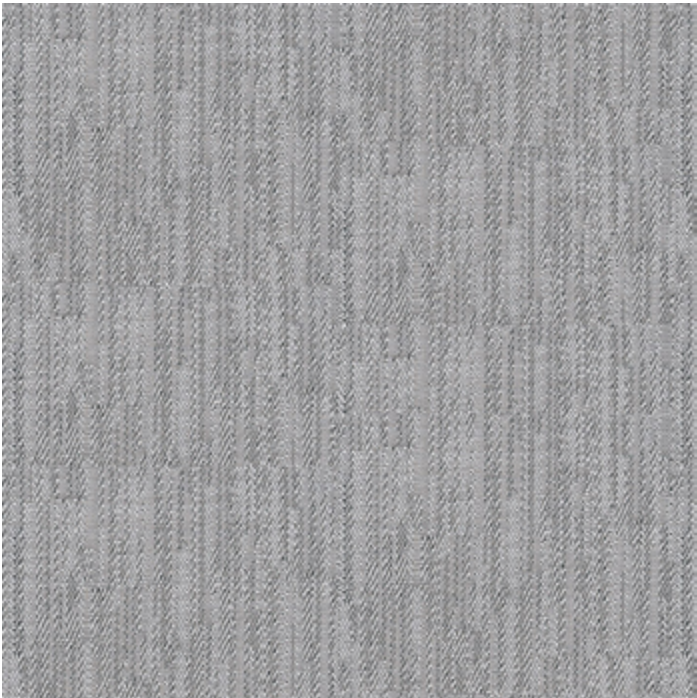

24x24 Grey




12x24 Grey

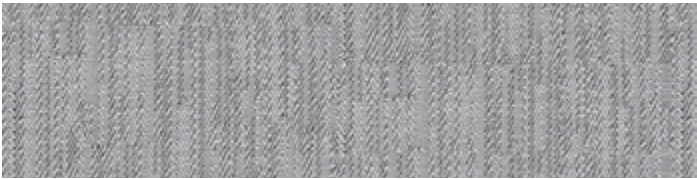

6x24 Grey




4x24 Grey

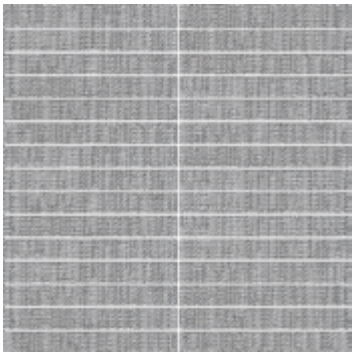

1x6 Grey Mosaic


DENIM

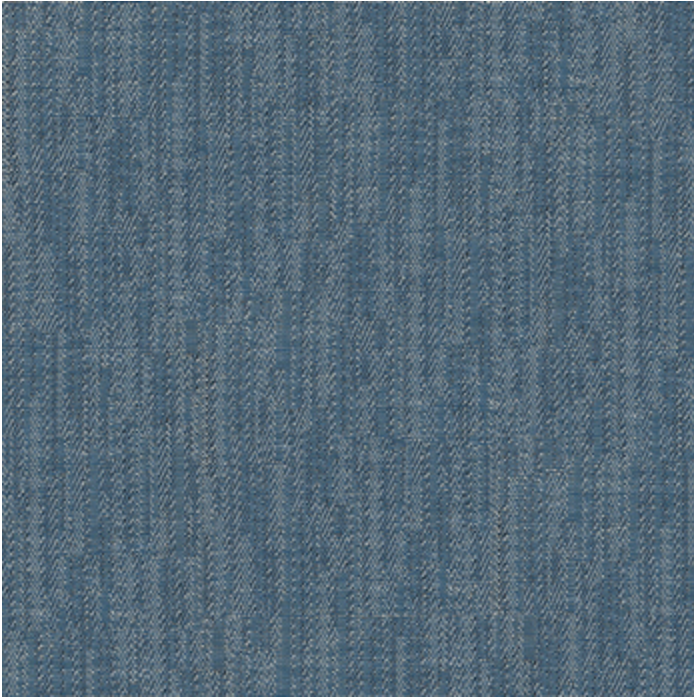


24x24 Denim




12x24 Denim

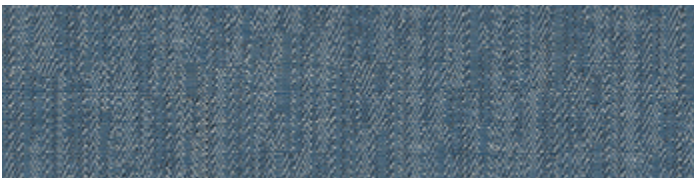

6x24 Denim



4x24 Denim

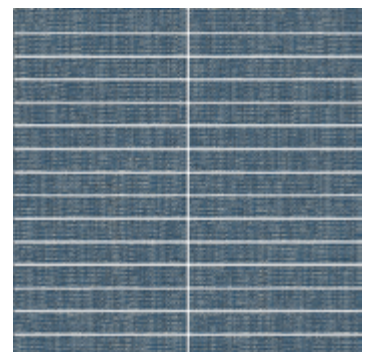

1x6 Denim Mosaic


NIGHT




24x24 Night




12x24 Night

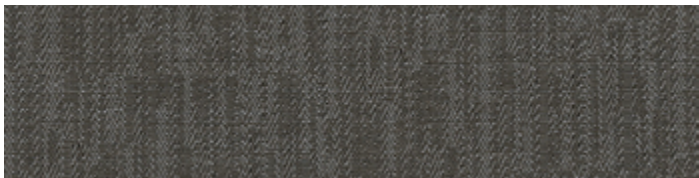

6x24 Night



4x24 Night

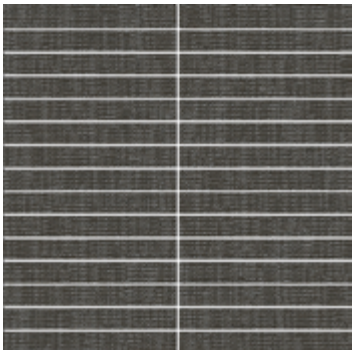

11x6 Night Mosaic

MIX



24x24 Mix



1x6 Mix Mosaic























CRASH

ARCHITECTURAL
CERAMICS




CRASH

ARCHITECTURAL
CERAMICS







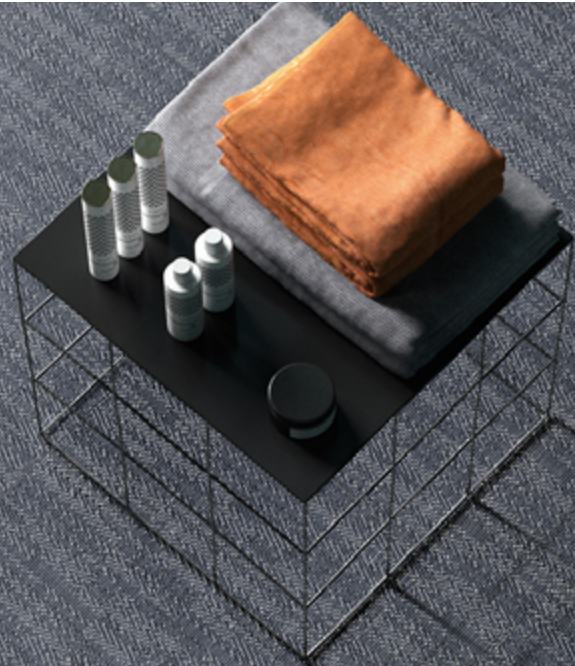







CRASH

ARCHITECTURAL
CERAMICS



CRASH

ARCHITECTURAL
CERAMICS





AVAILABLE SIZES

	FIELD				MOSAIC
	24x24	12x24	6x24	4x24	1x6 Stacked
White	M	M	M	M	M
Ecru	M	M	M	M	M
Grey	M	M	M	M	M
Denim	M	M	M	M	M
Night	M	M	M	M	M
Mix	M				M

M=Matte Finish

Lead times for specialty & non-stocked items varies depending on product ordered, quantity, and destination. Please contact ACI to determine the lead time to order samples and material.

DESCRIPTION

Crash bursts into the world of fashion using the artistic graphics of tissue and defining a new ornamental code for advanced porcelain imaging.

INSTALLATION & MAINTENANCE

Crash may be installed using standard ceramic tile installation methods and materials, as recommended by the Tile Council of North America (TCNA). An Architectural Ceramics sales representative will advise you on general installation questions.

TECHNICAL INFORMATION

ORIGIN: ITALY

AVAILABLE FINISHES: MATTE

TYPE: COLOR BODY PORCELAIN

EDGE: RECTIFIED

LOOK: FABRIC

APPLICATION: WALL & FLOOR

USE: RESIDENTIAL & HIGH TRAFFIC COMMERCIAL

PACKAGING: PLEASE CONSULT YOUR ACI SALES REP FOR PACKAGING
INFORMATION

COLOR VARIATION: V2 SLIGHT VARIATION

THICKNESS: 3/8"

PORCELAIN ENAMEL INSTITUTE SCALE: N/A

DYNAMIC COEFFICIENT OF FRICTION: $\geq .42$

BREAKING STRENGTH: COMPLIANT TO ASTM C-648 > 250 LBS

WATER ABSORPTION: <.01%

STAIN RESISTANCE: YES

FROST RESISTANCE: YES

ENVIRONMENT: 20% PRE-CONSUMER RECYCLED CONTENT

WEBSITE LINKS

www.architecturalceramics.com/catalogs

PLEASE NOTE THIS LINK IS CASE SENSITIVE

CONTACT INFORMATION:

www.architecturalceramics.com

1.800.287.1742

For general sales inquiries: sales@architecturalceramics.com

For commercial & hospitality sample requests: samples@architecturalceramics.com

Headquarters: 800 E Gude Dr Suite F Rockville, MD 20850