



Adjustable pedestal support system & perimeter finishing edge profiles for rasied indoor floor covering applications
















#### PROSUPPORT PROFILE A/B



Prosupport Profile A/B can be used with ceramic, wood, composite material and natural stone coverings. Prosupport Profile A/B is a perimeter edge profile designed to protect and finish the outer edge of raised floors covering. The PROSUPPORT PROFILE A/B consists of 2 pieces Prosupport Profile A and Prosupport Profile B. Prosupport Profile A is an "L"-shaped horizontal flat base that is installed in between the PROSUPPORT head and surface covering. Prosupport Profile B is a visible finishing trim that attaches to the vertical L portion of Prosupport A. As indicated in below Prosupport A and B are available in multiple sizes and Prosupport B is available in multiple colors and finishes.



#### Punched and perforated **PROSUPPORT A** natural aluminium Length = 8' 10 - 1/4" (feet)

Article	Lx H inches	\$/Pc
BPPSAN 15015	5 29/32" x 19/32"	89.73
BPPSAN 15020	5 29/32" x 3/4"	94.02
BPPSAN 15025	5 29/32" x 1"	98.29

Length 8' 10 1/4" - pack. 20 Pcs




Natural aluminium

#### top profile **PROSUPPORT B** varnished aluminium Length = 8' 10 - 1/4" (feet)

Article	H1 inches	\$/Pc
PFPSAL 1060 (Pack. 20 Pcs)	2 3/8"	66.38
PFPSAL 1080 (Pack. 10 Pcs)	3 5/32"	77.09
PFPSAL 10100 (Pack. 10 Pcs)	3 15/16"	86.74


Length 8' 10 1/4" COLOURS (EMBOSSED)




#### ON DEMAND (EMBOSSED)



#### PROSUPPORT PROFILE T



Prosupport Profile T can be used with ceramic, wood composite material and natural stone coverings. Prosupport Profile T is a perimeter edge profile designed to protect and finish the outer edge of raised floors covering. Prosupport Profile T proprietary design allows to use the same material in the entire raised floor application for a visually pleasing and structurally sound installation. The vertical section of the profiles features specially designed fins that create a dovetail cladding system. This dovetail cladding system allows for the adhesive used to fix the covering to also mechanically bond to the profiles itself. The profile is provided with a decorative edge of 3/4" height to cover the exposed edge of the covering and is available in multiple colors and finishes.



PROSUPPORT T varnished aluminium					
Article	L x H inches h inches \$/Pc				
PSPRPT 20AL	7" x 3 3/16"	2 3/8"	102.78		
Length 8' 10 1/4" - pack. 20 Pcs - 54 Im					

#### COLOURS (EMBOSSED)

•	•	
GF	A	
Gray (RAL 7038)	Anthracite grey	

#### ON DEMAND (EMBOSSED)



#### PROSUPPORT PROFILE N



Prosupport Profile N can be used with ceramic, wood composite material and natural stone coverings. Prosupport Profile N is a perimeter edge profile designed to protect and finish the outer edge of raised floors covering. Prosupport Profile N proprietary design allows to use the same material in the entire raised floor application for a visually pleasing and structurally sound installation. The vertical section of the profiles features specially designed fins that create a dovetail cladding system. This dovetail cladding system allows for the adhesive used to fix the covering to also mechanically bond to the profiles itself. Prosupport Profile N completely visually eliminates the impact of a metal edge trim profile by using the covering itself to finish the edge.

# L 6 5/32" PSPRP 15560AL

PROSUPPORT N

PROSUPPORT N natural aluminium				
PROSUPPORT IN natural aluminium				
Article	L inches	H inches	\$/Pc	
PSPRP 15560AL	2 3/8"	6 5/32"	68.21	

Length 8' 10 1/4" - pack. 20 Pcs - 54 Im

#### **COLOURS**



Natural aluminium

Beige

#### **SELF-LEVELLING HEAD MODEL**

# Self-Levelling Head + Screw + Extension + Base

PROSUPPORT SYSTEM is a pedestal support system for indoor and outdoor raised floors. PROSUPPORT SYSTEM height is fully adjustable from a minimum of 1 3/8" to a maximum of 7-7/8". PROSUPPORT SYSTEM is a modular fully adjustable system made of Polypropylene suitable for outdoor areas like roof tops, terrace, pool surroundings, pedestrian walkways, decks and patios. Self-leveling head version has a specifically designed joint that allows to compensate for substrate pitches of up to 5% without the use of wedges. The raised floor will be horizontal even though the subfloor underneath has a draining pitch of up to 5%.

SELF LEVELING AND FIXED UNIVERSAL PROSUPPORT KIT (head not included) - polypropylene - box 40 pcs (base + screw: PSRG3555, PSRG5570, PSRG70110, PSRG11150)

(base + screw	+ extension +	screw: PSRG15	5170, PSRG17	200)

Article	Height range inches	Box / Pallet	\$/Pc	\$/Pack.
PSRG3555	1-3/8" ÷ 2-5/32"	40	5.77	230.80
PSRG5570	2-5/32" ÷ 2-3/4"	40	6.17	246.80
PSRG70110	2-3/4" ÷ 4-11/32"	15	7.20	288.00
PSRG11150	4-11/32" ÷ 5-29/32"	15	8.15	326.00
PSRG15170	5-29/32" ÷ 6-11/16"	15	12.20	488.00
PSRG17200	6-11/16" ÷ 7-7/8"	15	12.99	519.60

Items not for sale individually. Minimum order one box.

# **SELF-LEVELLING HEAD** with removable spacing flaps Spacing dimension 3/32" and 5/32" - pack = 40 Pcs per box


Article	Flap thick. inches	\$/Pc	\$/Pack.
PSRG 02	3/32"	1.29	51.60
PSRG 04	5/32"	1.29	51.60

Items not for sale individually. Minimum order one pack.

# 5/32"



Head with removable flaps 5/32"
PSRG 04





Head with removable flaps 3/32"
PSRG 02

## EXAMPLE PROSUPPORT SYSTEM HEIGHTS WITH SELF-LEVELLING HEAD

0-5%











#### HOW TO ORDER

1) Choose the code of the KIT without the head in the desired height (Ex: PSRG5570)


2) Choose the code of the desired head (Ex: PSRG 04)

#### EXAMPLE

To order 80 pieces of Prosupport with self-leveling head with 5/32" thick flaps and variable height from 2-5/32" to 2-3/4" Write in the order:

2 boxes of 40 pcs code PSRG70110 + 2 boxes of 40 pcs code PSRG 04

#### PROSUPPORT SYSTEM HEIGHTS

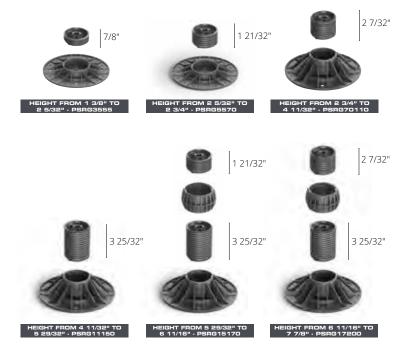

#### **FIXED HEAD MODEL**

# Fixed head + Screw + Extension + Base

PROSUPPORT System is a pedestal support system for indoor and outdoor raised floors. PROSUPPORT SYSTEM height is fully adjustable from a minimum of 1 3/8" to a maximum of 7-7/8". PROSUPPORT System is a modular fully adjustable system made of Polypropylene suitable for outdoor areas like roof tops, terrace, pool surroundings, pedestrian walkways, decks and patios. Fixed head version allows for the raised floor to maintain the same pitch of the base. Fixed head can be used to create a desired pitched raised floor when large size coverings are used to improve drainage.

SELF LEVELING AND FIXED UNIVERSAL PROSUPPORT KIT (head not included) - polypropylene - box 40 pcs (base + screw: PSRG3555, PSRG5570, PSRG70110, PSRG11150) (base + screw + extension + screw: PSRG15170, PSRG17200)

Article	Height range inches	Box / Pallet	\$/Pc	\$/Pack.
PSRG3555	1-3/8" ÷ 2-5/32"	40	5.77	230.80
PSRG5570	2-5/32" ÷ 2-3/4"	40	6.17	246.80
PSRG70110	2-3/4" ÷ 4-11/32"	15	7.20	288.00
PSRG11150	4-11/32" ÷ 5-29/32"	15	8.15	326.00
PSRG15170	5-29/32" ÷ 6-11/16"	15	12.20	488.00
PSRG17200	6-11/16" ÷ 7-7/8"	15	12.99	519.60

Items not for sale individually. Minimum order one box.


FIXED HEAD with removable spacing flaps
Spacing dimension 3/32" and 5/32" - pack = 40 Pcs per box

Article	Flap thick. inches	\$/Pc	\$/Pack.
PSTP 02	3/32"	0.58	23.20
PSTP 04	5/32"	0.58	23.20

Items not for sale individually. Minimum order one pack.

# 5/32"

Head with removable flaps 5/32" PSTP 04



Head with removable flaps 3/32" PSTP 02

#### HOW TO ORDER

1) Choose the code of the KIT without the head in the desired height (Ex: PSRG5570)


2) Choose the code of the desired head (Ex: PSTP 04)

#### EXAMPLE

To order 80 pieces of Prosupport with self-leveling head with 5/32" thick flaps and variable height from 2-5/32" to 2-3/4" Write in the order:


2 boxes of 40 pcs code PSRG70110 + 2 boxes of 40 pcs code PSTP 04

#### PROSUPPORT SYSTEM HEIGHTS

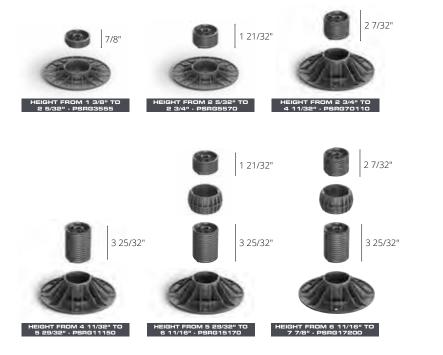



#### **EXAMPLE PROSUPPORT SYSTEM HEIGHTS WITH FIXED HEAD**









base



#### **OPTIONAL**

#### **Adjustable Spacer** Tabs 5/32"

Spacer tabs, 2 3/8" lenght, to be fixed on the self-leveling head. They allow the application of wooden, WPC and Aluminium joists with a maximun width of 3 5/32", for the laying of wooden and WPC flooring.

## **Anti-Noise And Anti-Slip Rubber Disk**

Rubber disk designed to reduces noise up to 25 db and prevents slipping of the tiles. Height 1/8" and diameter 4 21/64". To be placed on the selfleveling or fixed head.

## **Flange Locking Device**

Locking Flange prevents the rotation of the screw to avoid flooring movements over time. Height 5/16" and diameter 2 61/64". To be placed at the bottom of the screw.

Article LxH (inches) \$/Pc \$/Pack				
	<b>E SPACER TABS</b> 5/3 80 Pcs (box 80 pcs		opylene	

2 3/8" - pack. 80 PCS (box 80 pcs)				
c \$/Pack.				
6 164.80				

ANTI-NOISE AND ANTI-SLIP RUBBER DISK H 1/8" - pack. 180 Pcs (box 180 pcs)				
Article	н - Ø	\$/Pc	\$/Pack.	
<b>GARPS 3110</b>	H 1/8" - Ø 4 21/64"	1.91	343.80	

FLANGE LOCKING DEVICE - Polypropylene H 1/8" - pack. 250 Pcs (box 250 pcs)				
Article	H - Ø	\$/Pc	\$/Pack.	
AFBPS 875	H 5/16" - Ø 2 61/64"	1.91	477.50	









## **RUBBER DISK for laying on** bituminous roof membrane

Rubber disc, 3/32" thick, to be applied under the support (SQG 15) to protect the bituminous membrane.


RUBBER DISK for laying on bituminous roof

membrane 3/32 - pack. 100 PCS (box 100 pCS)				
Article	L (inches)	\$/Pc	\$/Pack.	
LVGG 02	3/32"	2.01	201.00	

# Spacer for application on gravel

Transparent plastic cross spacer for laying on gravel or irregular surfaces.

SPACER FOR APPLICATION ON GRAVEL Pack. 100 Pcs (box 100 pcs)			
Article	\$/Pc	\$/Pack.	
DILV	0.94	94.00	









# **PROSUPPORT: Weights and Dimensions**

			ALL Weights below are per pedestal			
Part Number	Height From	Height to	Max Tested Weight in KG	Max Tested Weight in Lbs	Operating Weight Limit Kg	Operating Weight Limit Lbs
PSRG3555	1 3/8"	2 5/32"	5,259	11,594	800	1763
PSRG5570	2 5/32"	2 3/4"	3,099	6,832	800	1763
PSRG70110	2 3/4"	4 11/32"	1,723	3,795	800	1763
PSRG11150	4 11/32"	5 29/32"	2,665	4,993	800	1763
PSRG15170	5 29/32"	6 11/16"	2,352	5,185	800	1763
PSRG17200	6 11/16"	7 7/8"	1,720	3,145	800	1763







SYSTEM















#### **CONTACT INFORMATION:**

www.architessa.com 1.800.287.1742

For general sales inquiries: sales@architessa.com

For commercial & hospitality sample requests: samples@architessa.com Headquarters: 1803 Research Blvd, Suite 402, Rockville, MD 20850