

DIESEL INDUSTRIAL GLASS

Ceramic



ARCHITESSA

an Architectural Ceramics brand



COLORS



8x24 White



4x12 White*



White Installation



8x24 Green



4x12 Green*




Green Installation

THIS PRODUCT HAS EXTREME VARIATION AS SHOWN ON PAGE FOUR

*Stocked Sizes

COLORS

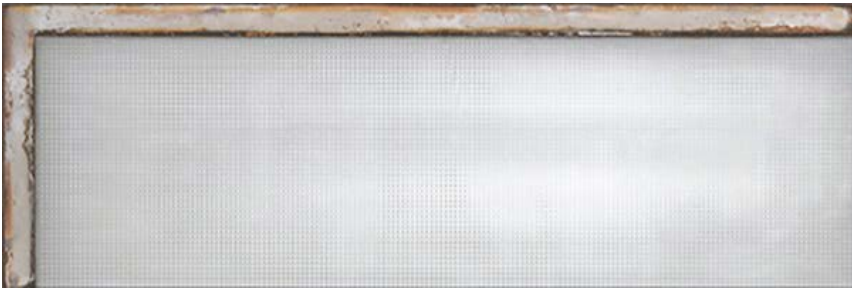

8x24 Grey



4x12 Grey



Grey Installation



8x24 Steel



4x12 Steel*



Steel Installation

THIS PRODUCT HAS EXTREME VARIATION AS SHOWN ON PAGE FOUR

*Stocked Sizes

EXPECTED VARIATION



8x24



4x12

WHITE			
			
GREEN			
			
GREY			
			
STEEL			
			















	WALL	
	8x24	4x12
White	G	G*
Green	G	G*
Grey	G	G
Steel	G	G*

G=Glossy finish, *Stocked Sizes

Italicized items are special order with extended lead times.

Please consult a sales rep for sample & product availability.

Lead times for specialty & non-stocked items varies depending on product ordered, quantity, and destination. Please contact Architessa to determine the lead time to order samples and material.

DESCRIPTION

The power of matter, with overtones of industrial archaeology. Decontextualised, the typical outdoor glass of industrial windows enters the home and participates in interior design as if created for this very purpose. The tiles are combined to form wall panels, which may also include metals and craquelé textures, with the aid of profiles in the same material. The panels consist of units in different textures and build up a whole with a really special effect.

INSTALLATION & MAINTENANCE

Diesel Industrial Glass may be installed using standard ceramic tile installation methods and materials, as recommended by the Tile Council of North America (TCNA). An Architessa sales representative will advise you on general installation questions. The manufacturer of this product recommends a 2mm grout joint.

TECHNICAL INFORMATION

ORIGIN: ITALY
TYPE: CERAMIC
EDGE: NON-RECTIFIED
THICKNESS: 7 MM
LOOK: INDUSTRIAL
SHADE VARIATION: 4 - SUBSTANTIAL VARIATION
NOTE: GREY & STEEL ARE SIMILAR IN COLOR BUT DIFFER IN THE COLOR OF THE FRAME PRINTED ON THE TILE.
APPLICATION: WALL
USE: COMMERCIAL & RESIDENTIAL

DCOF: N/A
BREAKING STRENGTH: COMPLIANT TO ASTM
C-648 > 250 LBS WATER ABSORPTION: 16%
STAIN RESISTANCE: YES
FROST RESISTANCE: YES
ENVIRONMENT: N/A

CONTACT INFORMATION:

www.architessa.com

1.800.287.1742

For general sales inquiries: sales@architessa.com

For commercial & hospitality sample requests: samples@architessa.com

Headquarters: 1803 Research Blvd. Suite 402 Rockville, MD 20850