KILN & PENNY Glazed Porcelain

ARCHITECTURAL CERAMICS






FIELD

3x12 Gesso*	3x12 Sabbia*	3x12 Cemento*	3x12 Argilla*	3x12 Petrolio*	3"x12" Lavagna*

WALL DECO




3x12*



Variation Range

MOSAICS

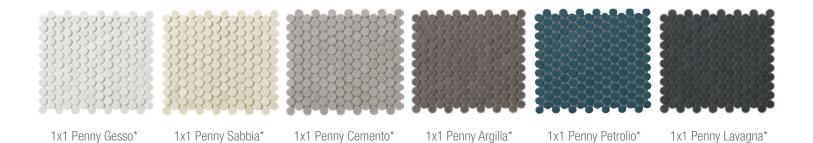

TRIM

0.4x12 Quarter Round Gesso*

2x12 Chair Rail Gesso*

5x12 Baseboard Gesso*

Quarter Round Available in all Colors



www.architecturalceramics.com



www.architecturalceramics.com



www.architecturalceramics.com



www.architecturalceramics.com



www.architecturalceramics.com



www.architecturalceramics.com



www.architecturalceramics.com



www.architecturalceramics.com



AVAILABLE SIZES	FIELD	WALL DECO	MOSAIC	TRIM		
AVAILABLE SIZES	3x12	3x12	1x1 Penny	0.4x12	2x12	5x12
			(11.6x12.8 Sheet)	Quarter Round	Chair Rail	Baseboard
Gesso	N*		N*	N*	N*	N*
Sabbia	N*		N*	N*		
Cemento	N*		N*	N*		
Argilla	N*		N*	N*		
Petrolio	N*		N*	N*		
Lavagna	N*		N*	N*		
Metal Inserto Mix (6 pc set)		G*				

G=Glossy finish, N=Natural finish, *Stocked Sizes

Lead times for specialty & non-stocked items varies depending on product ordered, quantity, and destination. Please contact ACI to determine the lead time to order samples and material.

DESCRIPTION

Kiln & Penny is a transitional subway tile line with matching penny round mosaics and sophisticated trim.

INSTALLATION & MAINTENANCE

Kiln & Penny may be installed using standard ceramic tile installation methods and materials, as recommended by the Tile Council of North America (TCNA). An Architectural Ceramics sales representative will advise you on general installation guestions.

TECHNICAL INFORMATION

ORIGIN: ITALY

AVAILABLE FINISHES: NATURAL TYPE: GLAZED PORCELAIN

EDGE: NATURAL LOOK: SOLID

APPLICATION: FLOOR & WALL USE: COMMERCIAL & RESIDENTIAL

PACKAGING: PLEASE CONSULT YOUR ACI SALES REP FOR PACKAGING

INFORMATION

COLOR VARIATION: V1 - UNIFORM APPEARANCE

THICKNESS: 8.5MM

PORCELAIN ENAMEL INSTITUTE SCALE: CLASS 2 (PETROLIO), CLASS 3

(CEMENTO & ARGILLA), CLASS 4 (SABBIA), CLASS 5 (GESSO) DYNAMIC COEFFICIENT OF FRICTION: DCOF: .56 (3X12 ONLY) BREAKING STRENGTH: COMPLIANT TO ASTM C-648 > 250 LBS

WATER ABSORPTION: ≤ 0.5% STAIN RESISTANCE: YES FROST RESISTANCE: YES

ENVIRONMENT: ECOLABEL CERTIFICATION

WEBSITE LINKS

www.architecturalceramics.com/catalogs

PLEASE NOTE THIS LINK IS CASE SENSITIVE

CONTACT INFORMATION:

www.architecturalceramics.com

1.800.287.1742

For general sales inquiries: sales@architecturalceramics.com

For commercial & hospitality sample requests: samples@architecturalceramics.com

Headquarters: 800 E Gude Dr Suite F, Rockville, MD 20850