



Microphone/  
Data COM Port

Power /  
program frequency



ANT

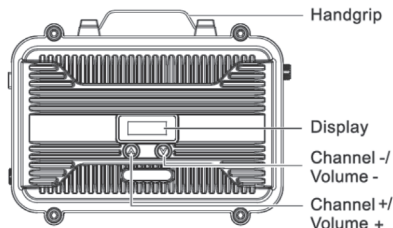

Handgrip

Display

Channel -/  
Volume -

Channel +/  
Volume +

## GET STARTED

1. Attach the Power Supply to the Power Port on the MXR10.
2. Plug the Power Supply into an outlet and the Repeater will power on automatically.
3. Connect Antenna Cable to SO239 Antenna Jack on MXR10.
4. Connect Antenna Cable to Antenna & Mount as high as safely possible.
5. Short press the up or down arrow to increase or decrease the volume.
6. Long press the up or down arrow to scroll through channels
7. Short press both arrows at the same time to view the current channel CTCSS/DCS settings.
8. Long press both arrows at the same time to toggle the keypad lock on/off.
9. To Power Down, simply disconnect the Power Supply from the MXR10 Repeater.