

MATIN PENDANT

PRODUCT FACT SHEET



MATIN PENDANT


DESIGN BY INGA SEMPÉ, 2024

The Matin Pendant Lamp comprises a pleated cotton shade combined with a braided fabric cord that can be hung from the ceiling to create a functional and elegant pendant lamp. The shade brings an inviting atmosphere to most rooms in the home and comes in different size and colour options.


HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A family of contemporary table, ceiling, wall, and floor lamps.
- Elegant and simple pendant comprising a pleated cotton shade with a cord set.
- Shares the same shades as the table lamp variants and can easily be changed.
- CE approved.
- Designed for use with a replaceable standard retro fit LED dimmable bulb.
- Available in three sizes and suitable for both private and office environments.


DIMENSIONS

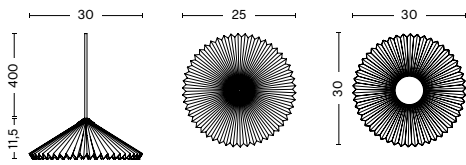

MATIN PENDANT 300
DIAMETER 30 CM
HEIGHT 11,5 CM

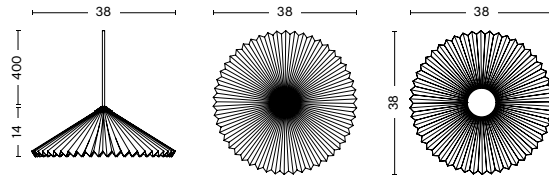

MATIN PENDANT 380
DIAMETER 38 CM
HEIGHT 14 CM

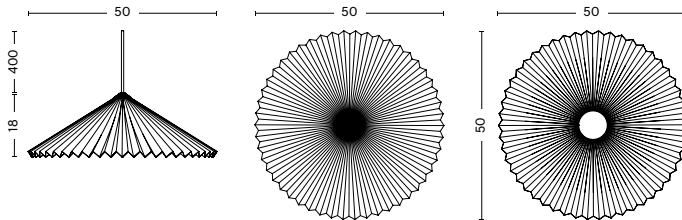

MATIN PENDANT 500
DIAMETER 50 CM
HEIGHT 18 CM

MATERIALS

SHADE

Cotton fabric laminated with a PVC sheet.

CAP AND CANOPY

Canopy, top screw and cap in injection moulded ABS.

HEATSINK




























Die-cast aluminum.

CORD

Braided fabric with silicone insulation.

COLOUR & FINISH

Please note that the colour codes are indicative.

SHADE COLOUR	SIZE			
		300	380	500
WHITE				
LAVENDER				
YELLOW				
PEACH				
OXIDE RED				
BRIGHT RED				
GREEN				
BLUE				

TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*

LED GX53 3-8W, 300-1500lm, 2700-3000K Warm White

DIMMABLE

Yes**

POWER SUPPLY

220-240V AC at 50/60Hz

IP

20

CORD LENGTH

400 cm

SWITCH

No

*Bulb not included

**If used in conjunction with a wall mounter dimmer switch

TEST SPECIFICATIONS*

FLUX (LUMENS)

448lm

CCT (KELVIN)


2700K, warm white

CRI (1-100)

85

*Photometrics and the specification shown is taken using the integrated LED bulb fitted in the production luminaire.


PHOTOMETRICS

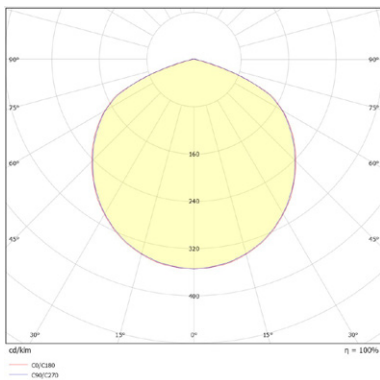

CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following European EN IEC standards which relate specifically to electrical lighting products including:

- EN 60598-1
- EN 60598-2-1

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.

[LINK TO DIGITAL LIBRARY](#)