


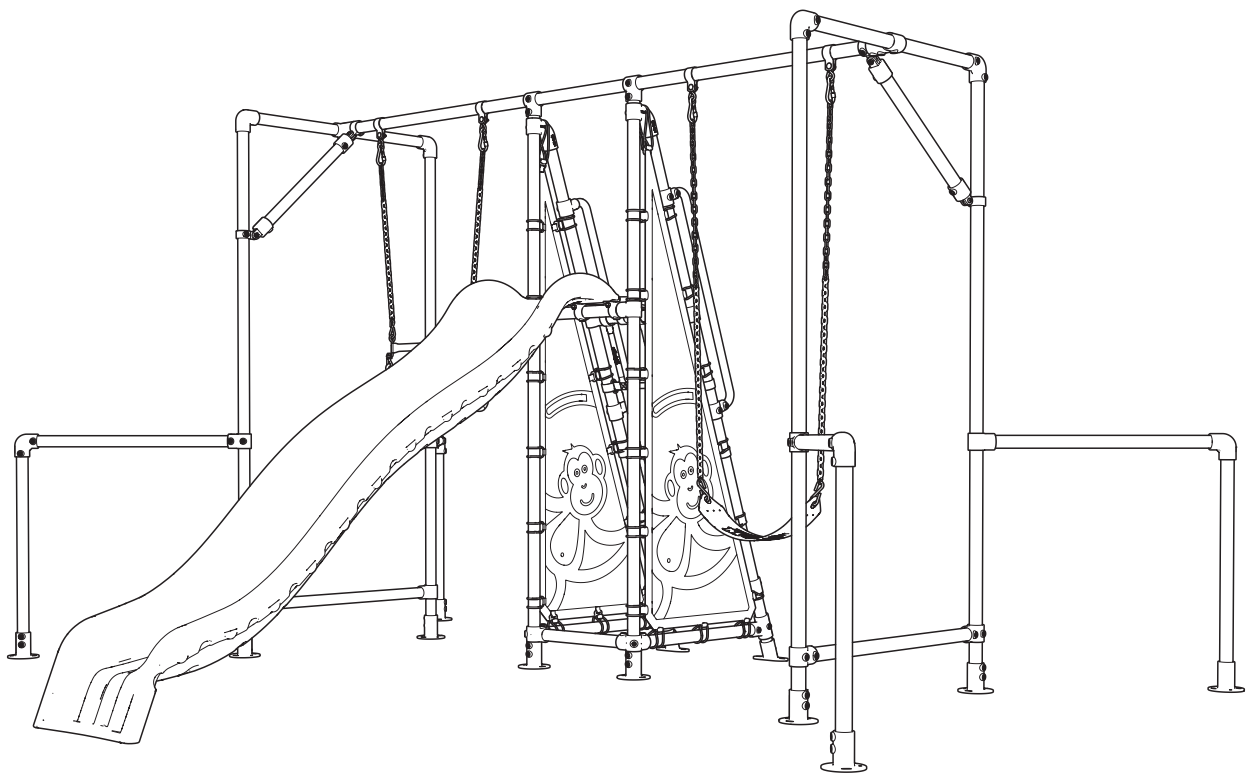

SWING FRAME & SLIDE ASSEMBLY INSTRUCTIONS

CONTENTS

Warnings	Page 1
Assembly Tips	Page 3
Inventory	Page 4
Assembly Instructions	Page 7
Maintenance	Page 21

WARNING

PLEASE CAREFULLY READ ALL INFORMATION CONTAINED IN THIS ASSEMBLY MANUAL BEFORE YOU INSTALL AND USE YOUR FUNKY MONKEY BARS®.


SAFETY NOTICE

1. Any person handling or using the Funky Monkey Bars® products must follow the instructions as described in this document. The person in charge of assembling and using the equipment must ensure that the recommendations for use given in this document are seen by all users.
2. Only use the Funky Monkey Bars® after they have been fully assembled and after checking that the fittings are tightened properly (*refer to page 3 - Correct Tightening Method*).
3. DO NOT install your Funky Monkey Bars® over concrete, asphalt, packed earth, wood decking or any other hard surface. A fall onto a hard surface can result in serious injury or death.
4. Inspect all grub screws, bolts and nuts at the beginning of each play session to ensure your Funky Monkey Bars® are tight and secure.
5. Ensure all tubes are fully inserted into fittings until you hear the magic "CLUNK" sound.
6. Ensure your Funky Monkey Bars® are properly secure at ALL times. Pegs are in place and inserted fully into the ground.
7. DO NOT exceed the maximum load/weight limit as recommended by Funky Monkey Bars®.
8. Children should be supervised by an adult at all times.
9. Installing a gym/crash mat under the fall zone area of your Funky Monkey Bars® would be recommended for children learning this new skill. This will reduce the chance of injury and build the child's confidence while they build strength and master the skill.
10. Ensure you have thoroughly read your assembly and installation instructions and viewed our on-line installation videos at <https://www.funkymonkeybars.com/blogs/installation-maintenance-videos>
11. DO NOT climb, sit or stand on top of the monkey bar (horizontal ladder) section.
12. DO NOT jump from the top of any section of the monkey bar.
13. DO NOT use your Funky Monkey Bars® when wet as the steel will be slippery.
14. DO NOT attach items to your frame that are not designed specifically to be used with Funky Monkey Bars®, especially lower quality products that have not been approved by Funky Monkey Bars®.
15. Ensure the height of your Funky Monkey Bars® (horizontal ladder) are set at a level that is age appropriate.
16. DO NOT install your Funky Monkey Bars® over or near objects that could interfere with users in an unsafe way. Maintain a clear area around your Funky Monkey Bars®.
17. DO NOT use your Funky Monkey Bars® while under the influence of drugs and alcohol.
18. Wear clothing free of drawstrings, hooks, loops or anything that could get caught while using your Funky Monkey Bars® and result in entanglement and/or strangulation.


ASSEMBLY

1. Keep small children away from the Funky Monkey Bars® during assembly.
2. Do not attempt to use the Funky Monkey Bars® until it is completely assembled and every fitting is tight and secured.
3. Installation typically takes 1-2 hours to complete. Two people are recommended for assembly.
4. Ensure all fittings are tightened to the correct tightening method as described on page 3.
5. Assembly should be carried out on clean, dry, level surface


Please refer to the video section on the Funky Monkey Bars® website for more handy tips and assembly instructions at <http://www.funkymonkeybars.com/pages/videos>



Assembly requires 2 adults.

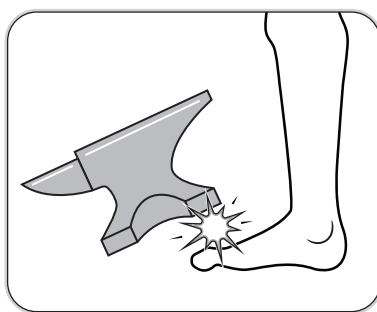

Heavy items !

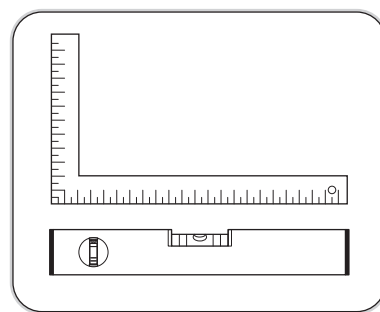

Work on flat level surface.

LOCATION


1. A safe fall zone around your Funky Monkey Bars® is essential. A minimum distance of 1.5m to 2m (5 ft to 6.5ft) is recommended around the elevated hanging points of your Funky Monkey Bars®.
2. Place your Funky Monkey Bars® on level ground, away from any structure or obstruction such as a fence, garage, house, overhanging branches, laundry lines or electrical wires and remove any obstructions beneath your Funky Monkey Bars®.
3. Ensure your Funky Monkey Bars® are positioned away from retaining walls, pool fences, structures and other play equipment. Maintain a clear space around the whole perimeter of your Funky Monkey Bars®.
4. Place your Funky Monkey Bars® on the most level surface available.

MAINTENANCE


1. At the beginning of each heavy play session we recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Tighten all bolts, grub screws and applicable hardware (as per page 3)
 - Lubricate all metallic moving parts as per instructions (flying fox, swing hooks etc)
 - Check all protective coverings on bolts, pipes, edges and corners. Replace if they are loose, cracked or missing.
 - Check all moving parts including swing seats, shackles, snap hooks, chains and trolleys for wear, rust, or other deterioration. Replace as needed.
2. Twice a month during play season we would recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Tighten all connections and hardware
 - Check all protective coverings on bolts, pipes, edges and corners. Replace if they are loose, cracked or missing.
3. Once a month during play season we would recommend the following maintenance processes be performed on your Funky Monkey Bars®:
 - Lubricate all metallic moving parts as per instructions (flying fox, swing hooks etc). If swings start to squeak then lubricate swing hooks.
 - Check all moving parts including swing seats, ropes, chains and trolleys for wear, rust, or other deterioration. Replace as needed.
 - Owners shall be responsible for maintaining the legibility of any warning labels.

For additional information concerning your Funky Monkey Bars®, please contact our customer service team or check our website for any important updates. Phone - 1300 912 198 or www.funkymonkeybars.com

CORRECT INSERTION INTO FITTINGS - (INDICATIVE DIAGRAM SHOWN)

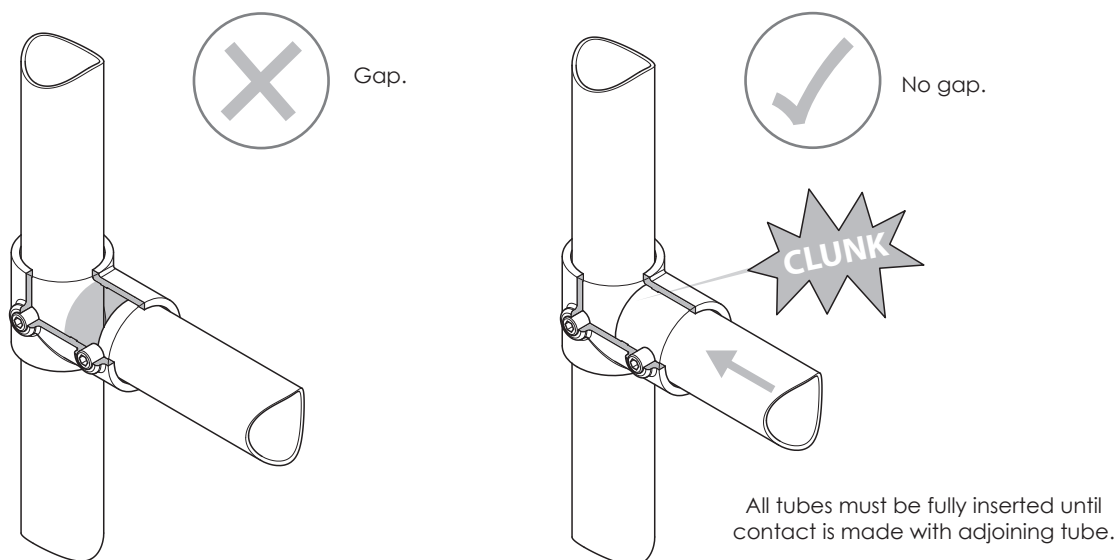


CORRECT TIGHTENING METHOD OF GRUB SCREWS - (INDICATIVE DIAGRAM SHOWN)

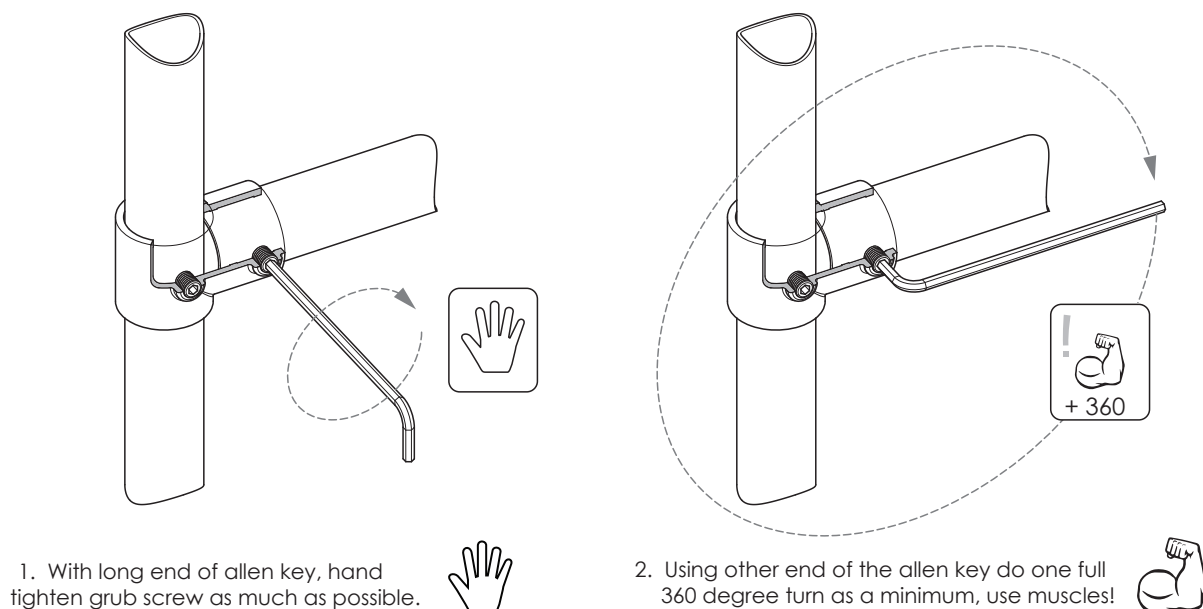


FIXING TYPICAL ORIENTATION - (INDICATIVE DRAWING SHOWN)


Unless otherwise stated all grub screws and fittings should face downwards and outwards. This will reduce weathering damage, help with assembly and ease of maintenance.

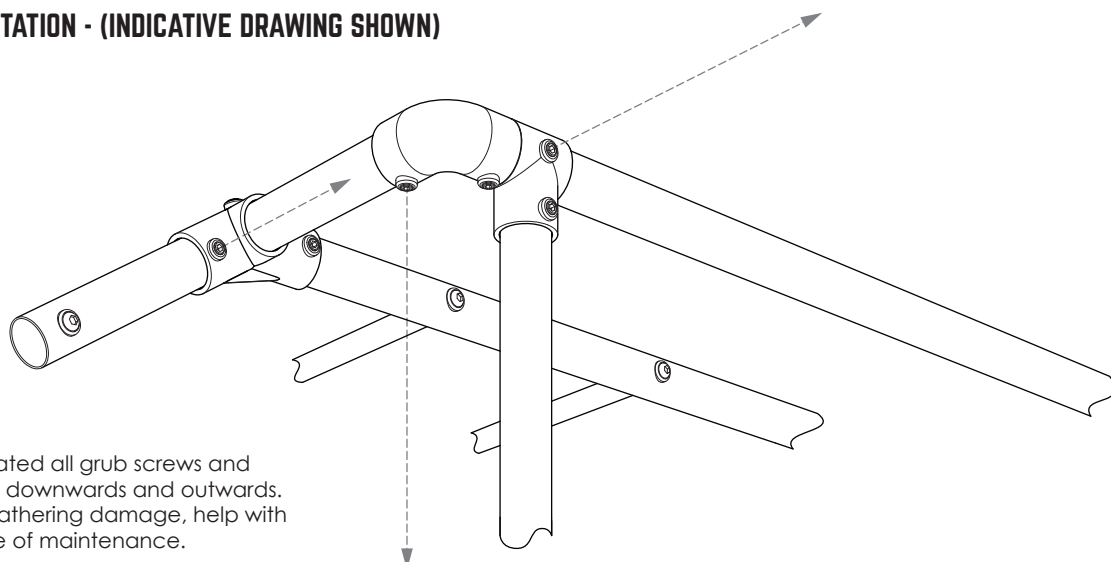


TOOLS REQUIRED FOR INSTALLATION




1x
8mm Allen key
(Included)

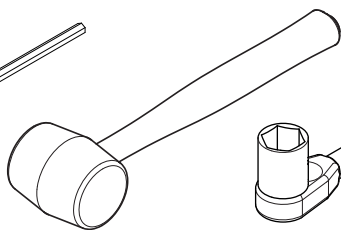


1x
Soft Hammer
(Not included)

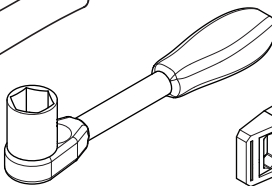


1x
17mm Ratchet
(Not included)

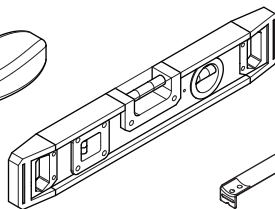

1x
Spirit Level
(Not included)




1x
Tape Measure
(Not included)

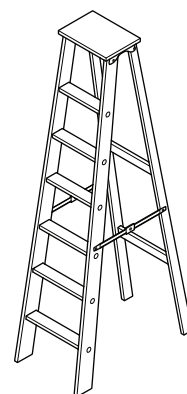


2x
3m Step Ladder
(Not included)


FITTINGS




4x 101R-D48-B33




12x 101-D48




2x 101L-D48




2x 101A-D48




2x 101J-D48




2x 116-D48



4x 125-D48




8x 131L-D48




2x 133-D48




4x 173M/F-D48




3x 198-D48



2x 199-D48



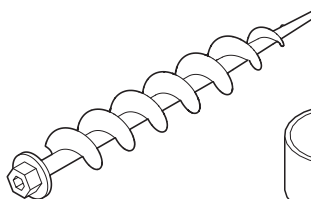


16x Spiral Pegs

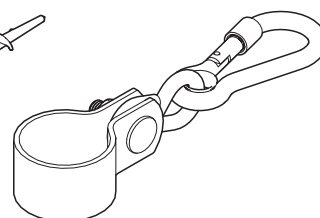


4x Swing Hooks


INVENTORY (CONTINUED)

2x Hand Rail	33Dia. x 900mm	
4x Slide Frame Tube	48Dia. x 500mm	
2x Brace Tube	48Dia. x 600mm	
2x Slide Frame Tube	48Dia. x 750mm	
4x Twirly Whirly Tube	48Dia. x 900mm	
4x Support Tube	48Dia. x 1040mm	
8x Leg Tube	48Dia. x 2300mm	
1x Swing Tube	48Dia. x 2950mm	

HARDWARE AND ACCESSORIES




1x
Slide

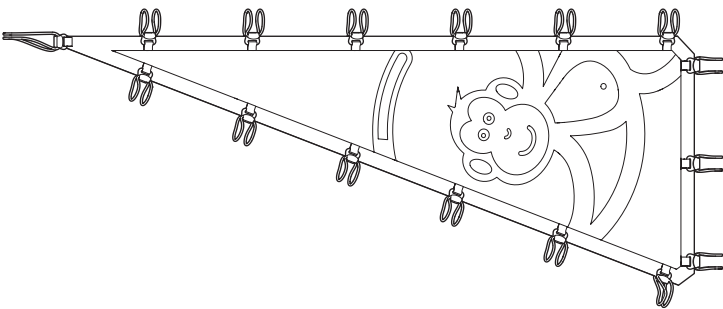

2x
Infill Panels with Bungee cords



1x
Platform


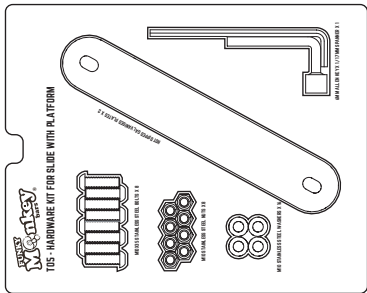


1x
T05 - Hardware Kit for Slide




1x
Logo Plate (Not to Scale)

01 FRAME ASSEMBLY




Assemble the frame as illustrated.
Loosely tighten fittings on the
leg tubes for later adjustment.

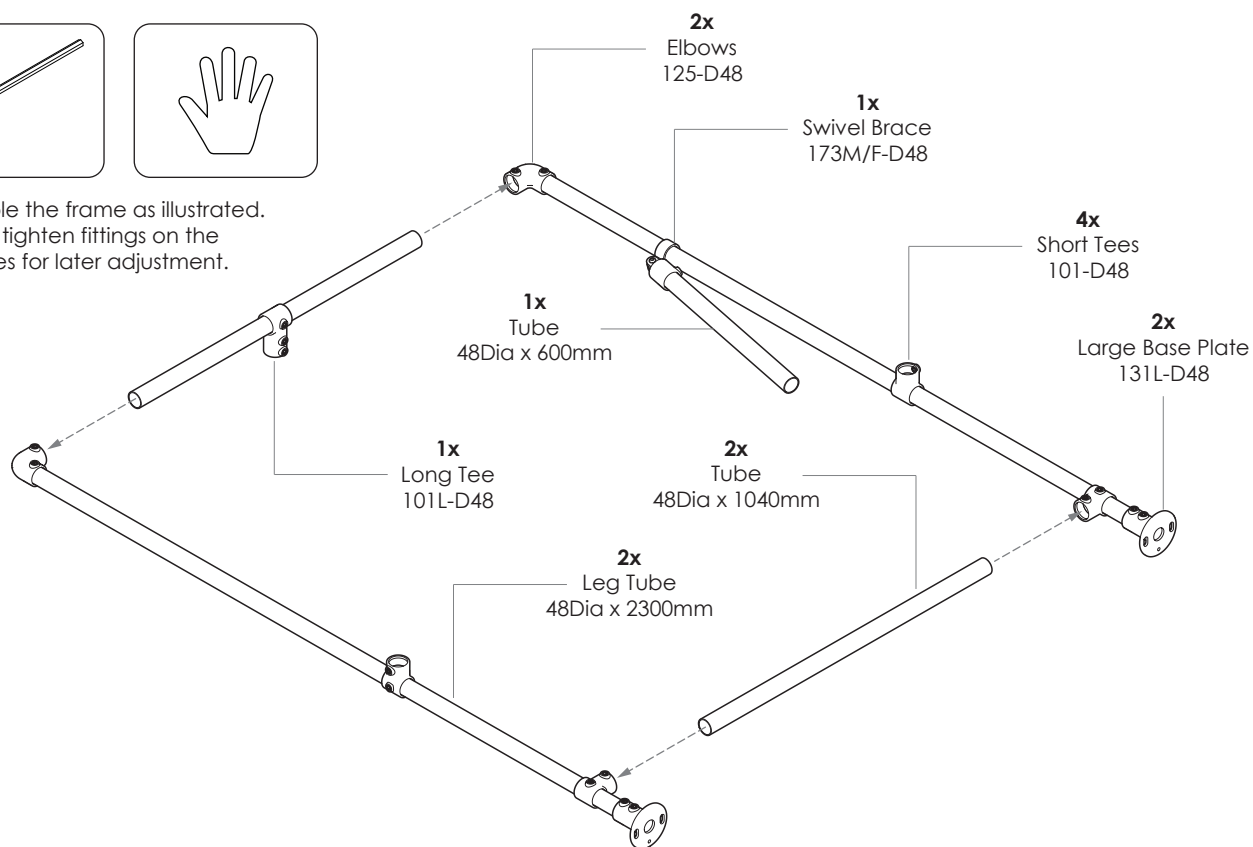


02 FRAME ASSEMBLY


Create two frame ends.

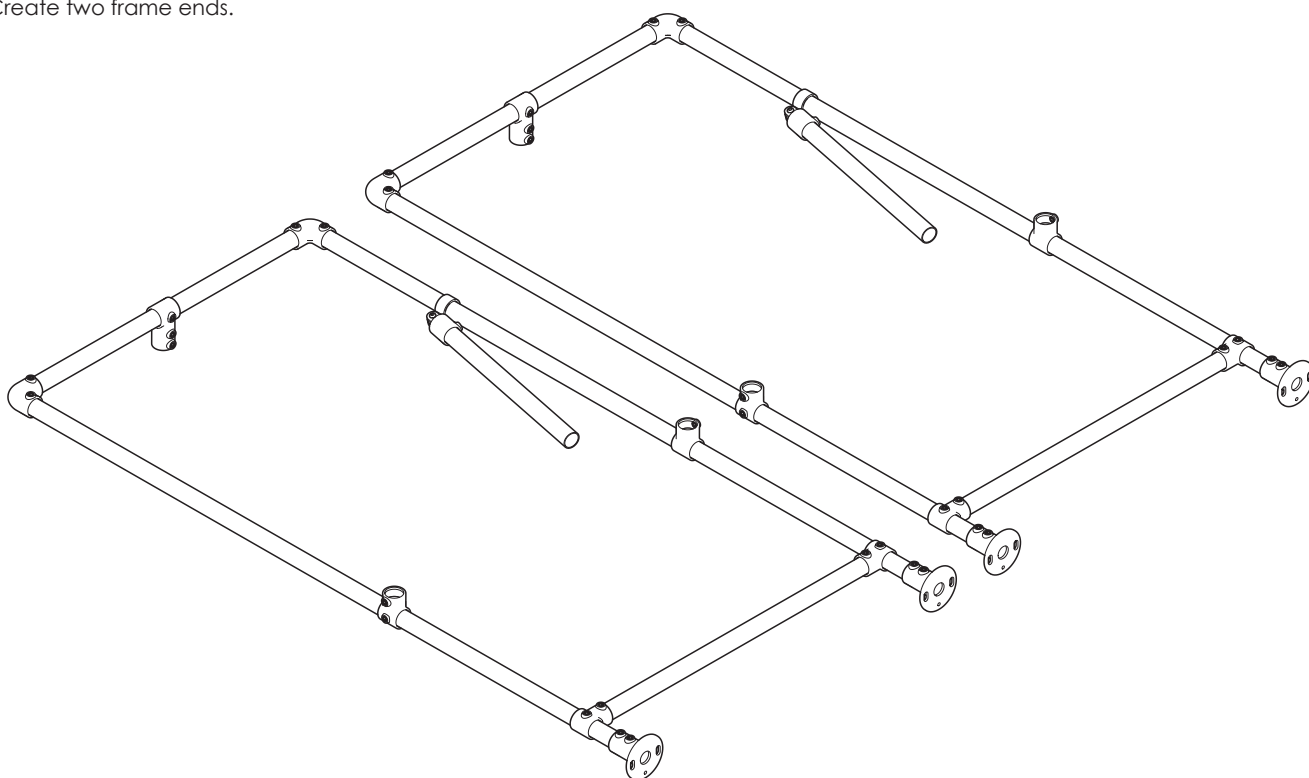

03 SWING BAR ASSEMBLY


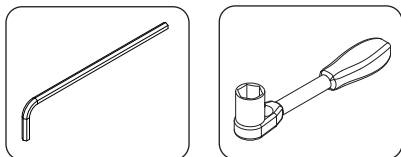


Depending on the number of accessories you have purchased, the number of swing hooks may vary to what is illustrated below.

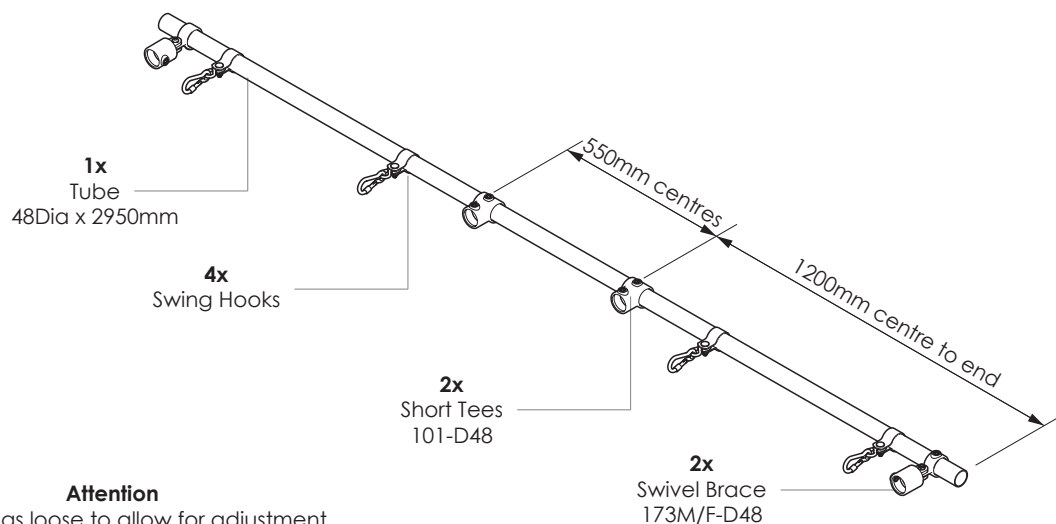


Attention

Keep fittings loose to allow for adjustment during later assembly.

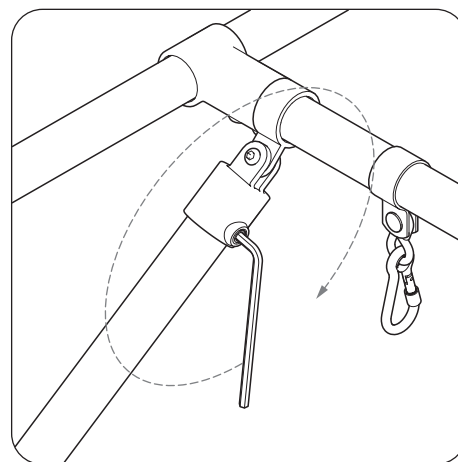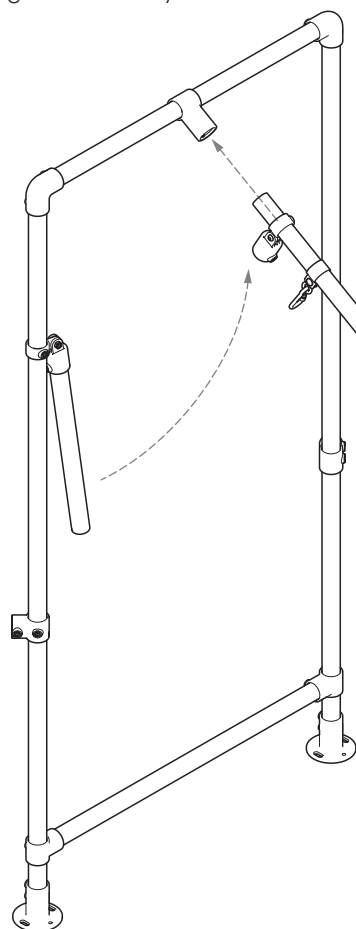


Fully tighten all grub screws.

04 ASSEMBLE SWING FRAME





Attach the assembled frame section to the other side and fully tighten all grub screws.

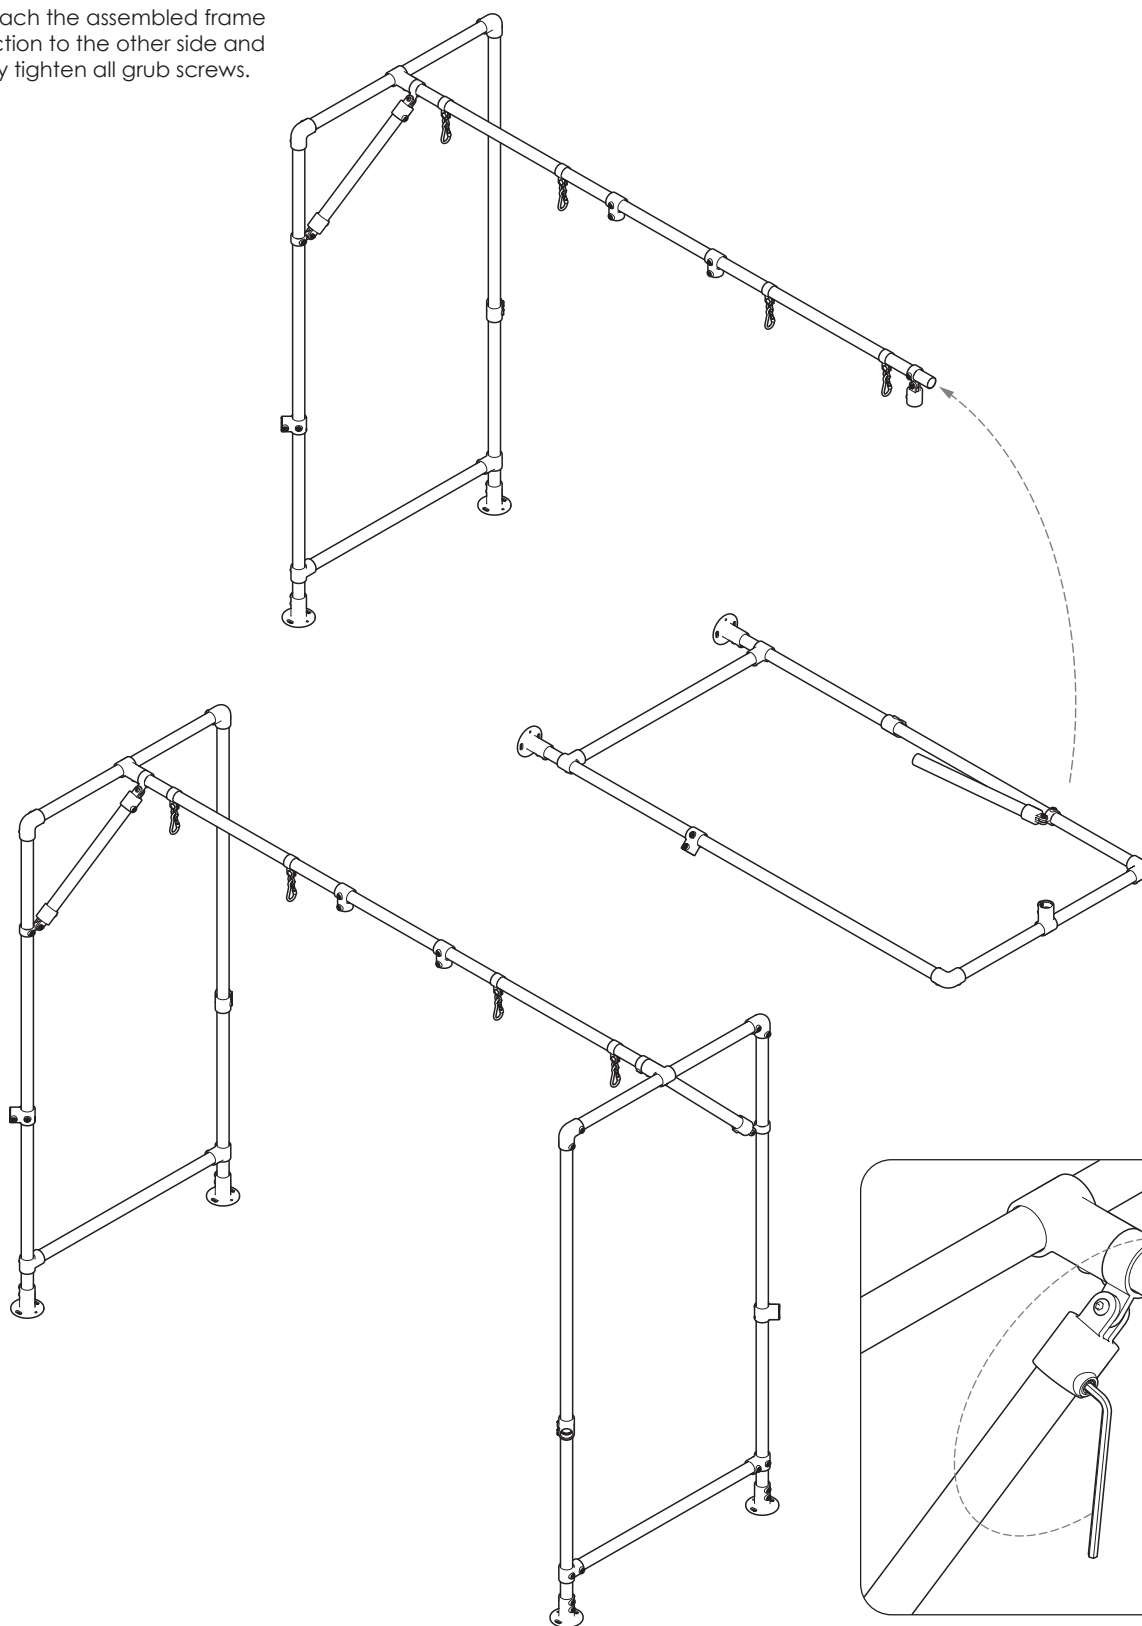


Fully tighten all grub screws.

05 SLIDE FRAME ASSEMBLY




Assemble the parts as shown below. Lightly tighten the fittings to allow for adjustment at step 7.


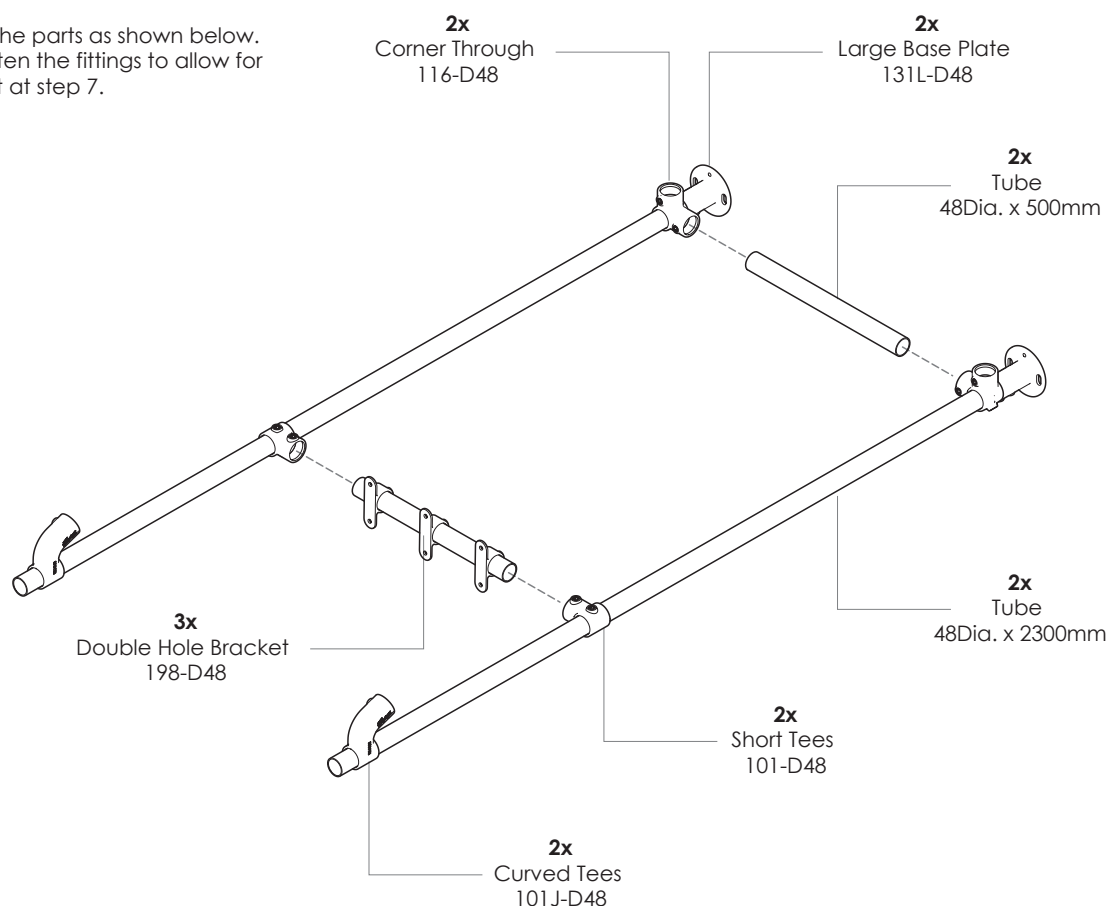


Dimensions


These dimensions are measured to the centre of each fitting. Use them as a guide as you may need to adjust their placement slightly depending on the level of your ground. **Do not** over-tighten the fittings as you may need to adjust their position later.

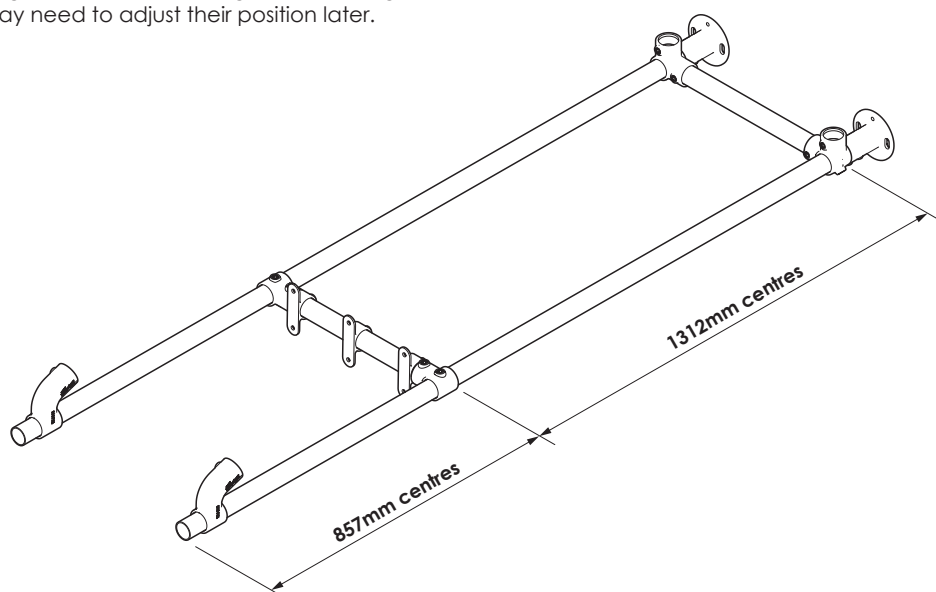

06 ANGLED FRAME ASSEMBLY




Assemble the parts as shown below.
Lightly tighten the fittings to allow for adjustment at step 7.


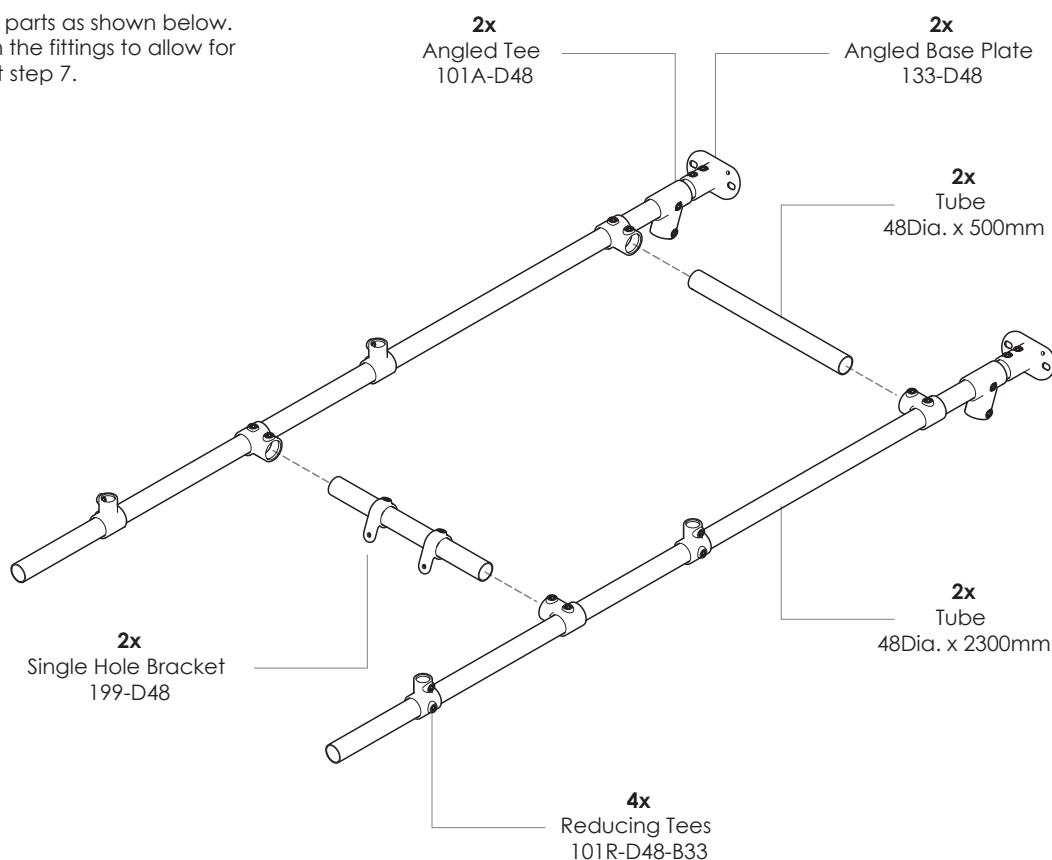


Dimensions

These dimensions are measured to the centre of each fitting. Use them as a guide as you may need to adjust their placement slightly depending on the level of your ground. **Do not** over-tighten the fittings as you may need to adjust their position later.

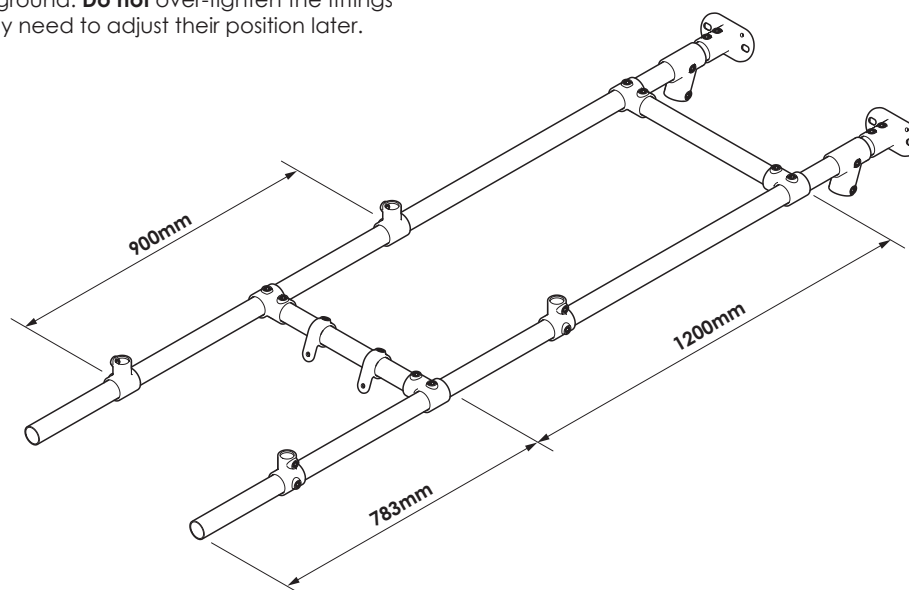


07 SLIDE FRAME ASSEMBLY





Assemble the two frame sections as shown below. Add the two 750mm tubes to the bottom of the frame.

Fully tighten all screws.

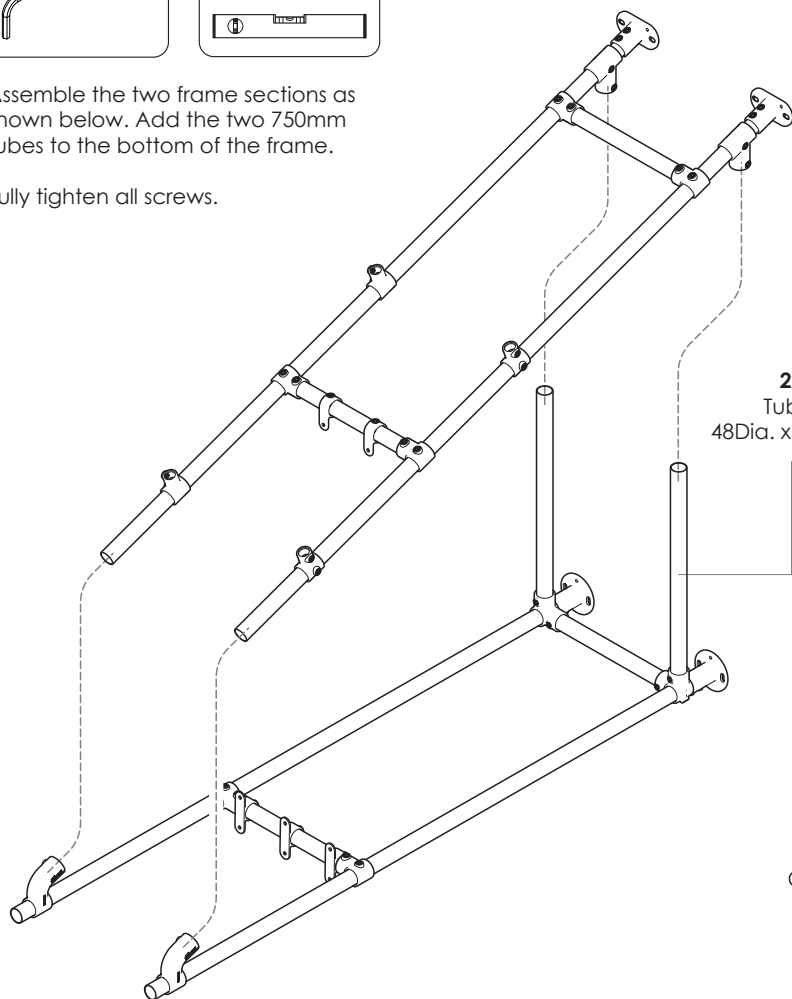


2x
Tube
48Dia. x 750mm

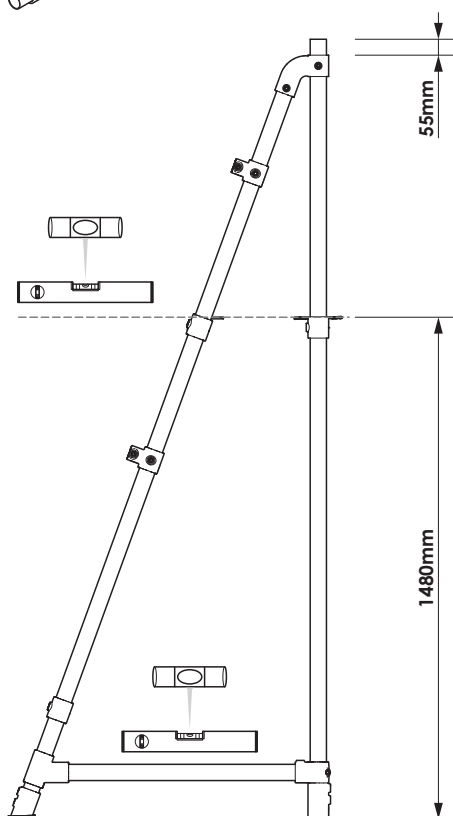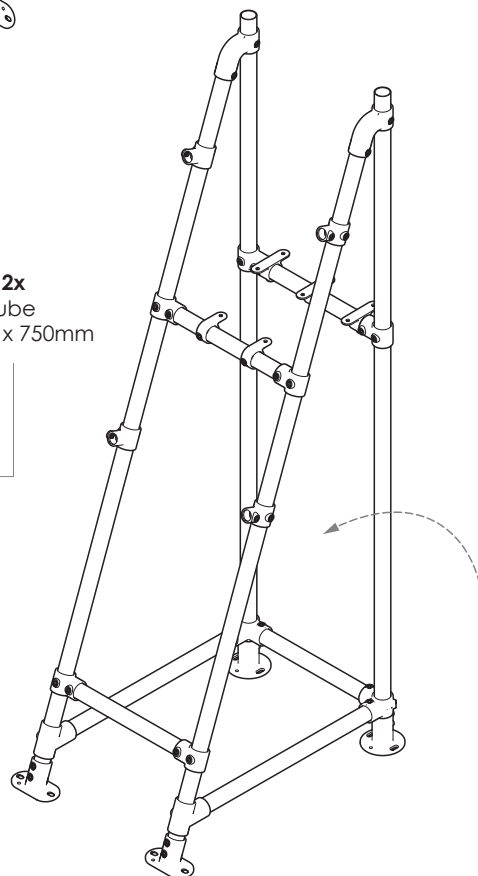


Attention








Ensure the height of the brackets are correct and level. Fully tighten all screws.

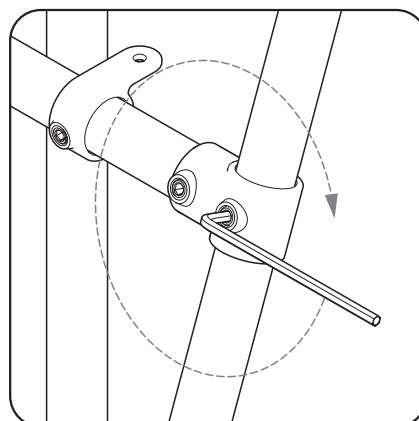


08 CARGO NET



1. Loop the cargo net straps over the tube and feed it into the quick links. Tighten the top quick links.
2. Tighten the quick links on both sides of the cargo net.
3. Tighten the bottom quick links.
4. If you keep the short tees and tube on the bottom loose, you can add tension to the cargo net once installed by adding downwards pressure to the tube.
5. Tighten the short tees.

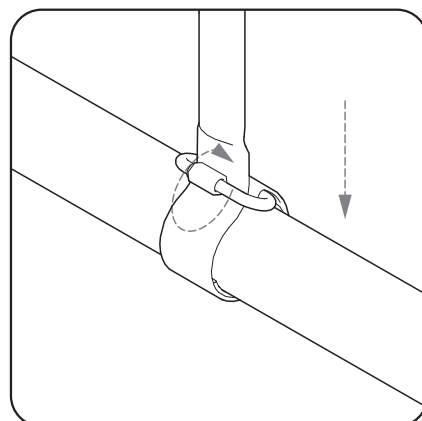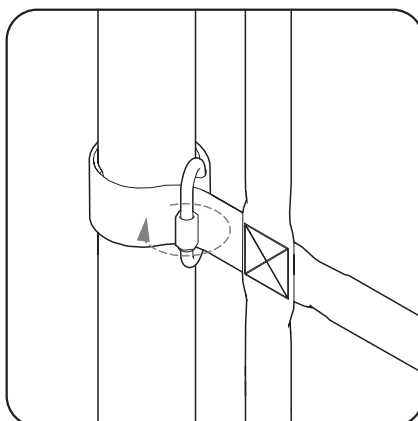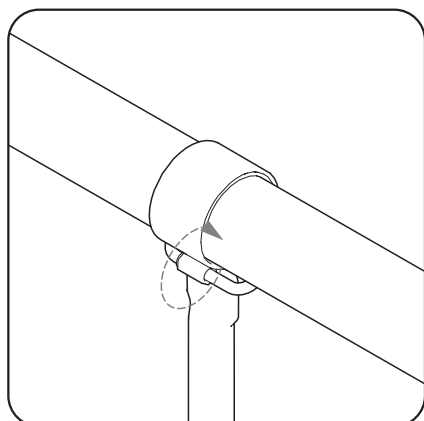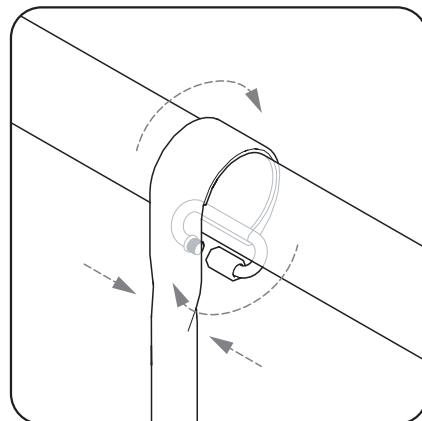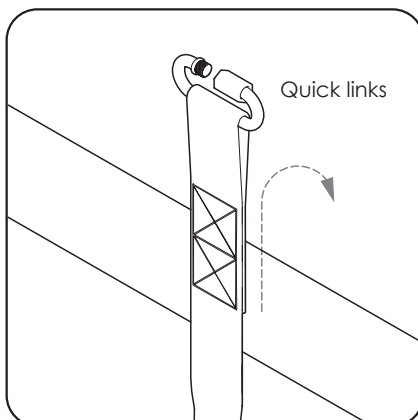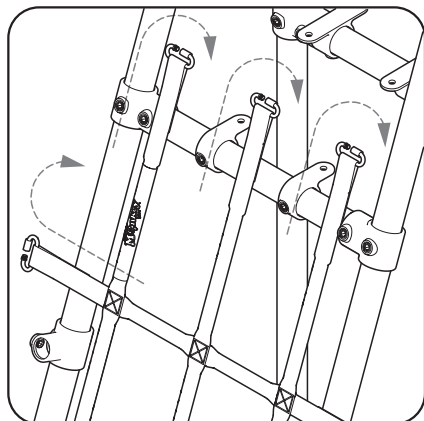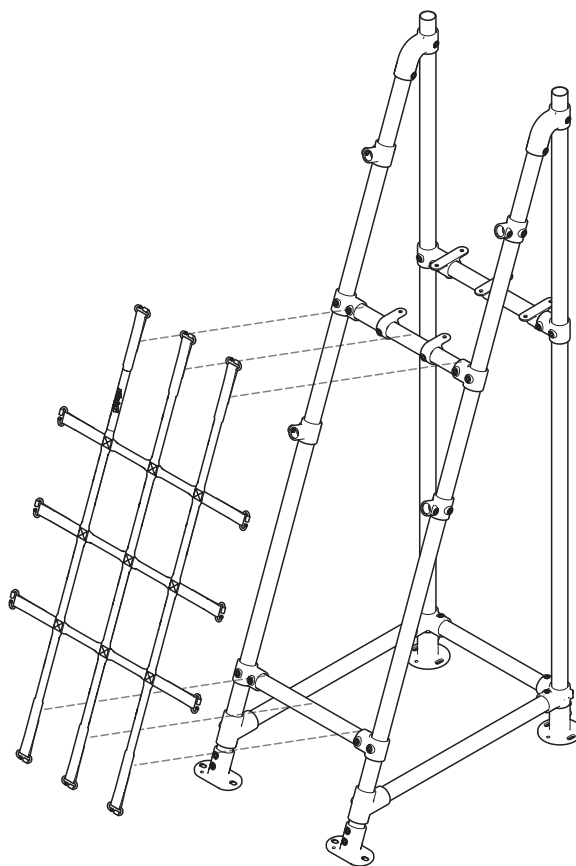


09 HAND RAILS




Add the two hand rails to reducing tees as shown below. Loosen the reducing tees if required to get the hand rails into position.

Fully tighten all screws.


2x
Hand Rails
33Dia. x 900mm

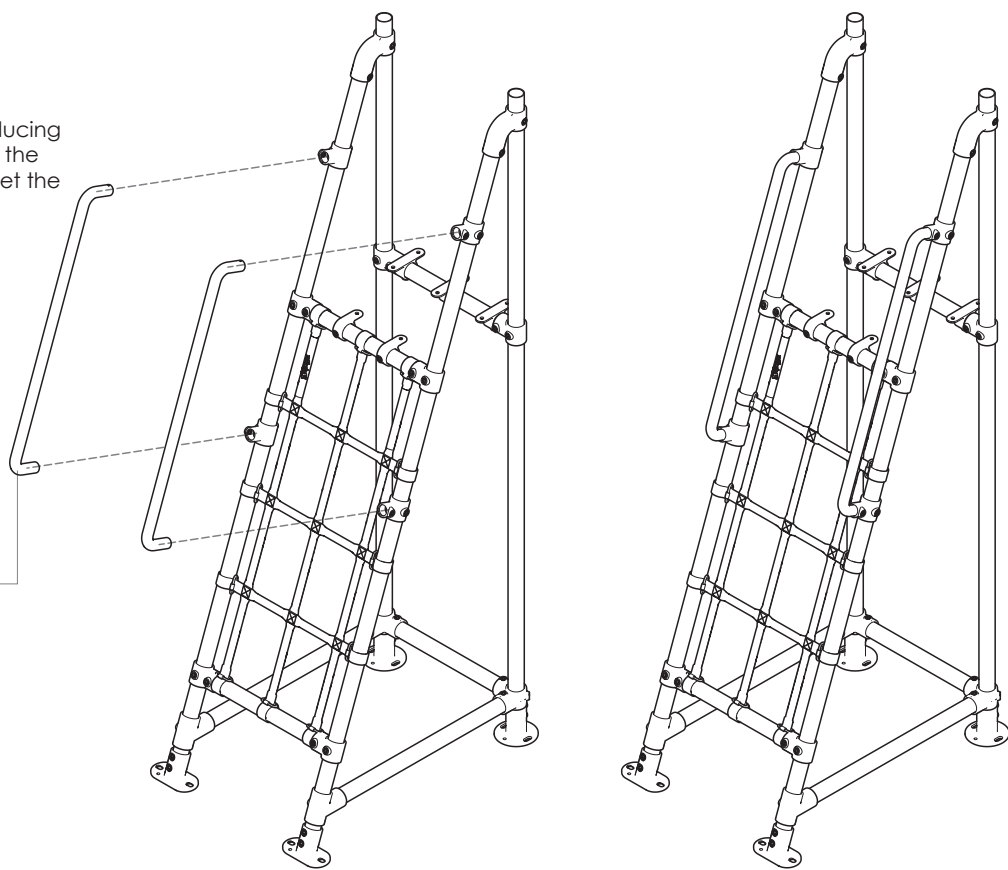



10 PLATFORM





Open your T05 - Hardware Kit and use the fasteners as shown below. Place your reinforcement plates into the cavities under the platform.

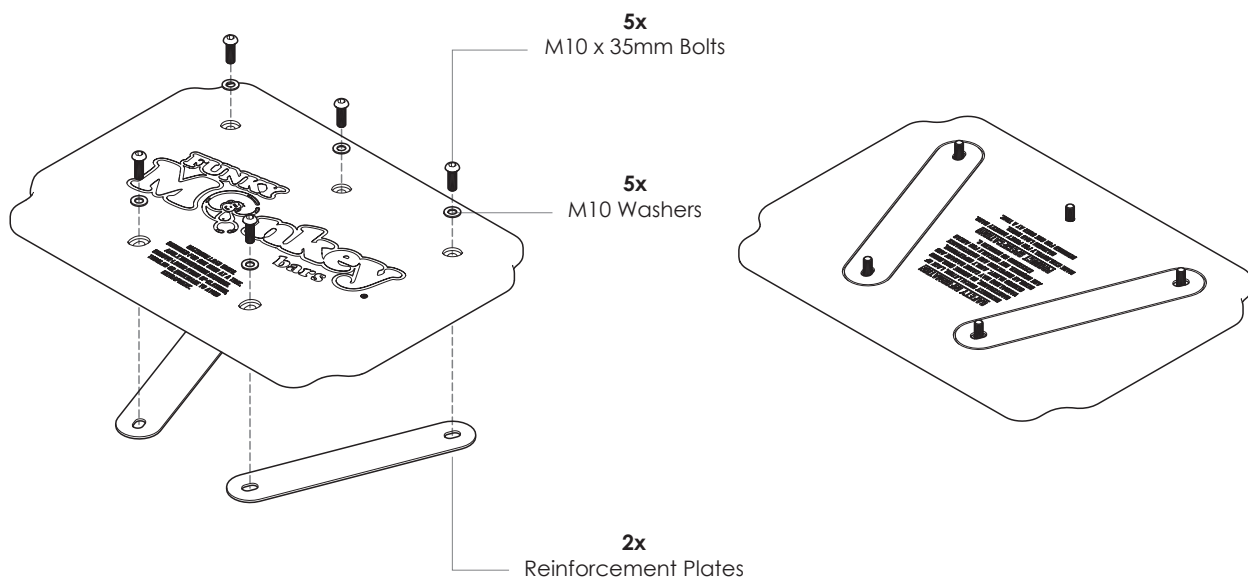



A diagram of a pipe bent at a 90-degree angle. The pipe is shown in a perspective view, with the bend clearly visible. The pipe is labeled with '1' at the top and '2' at the bottom, indicating the two segments of the pipe.

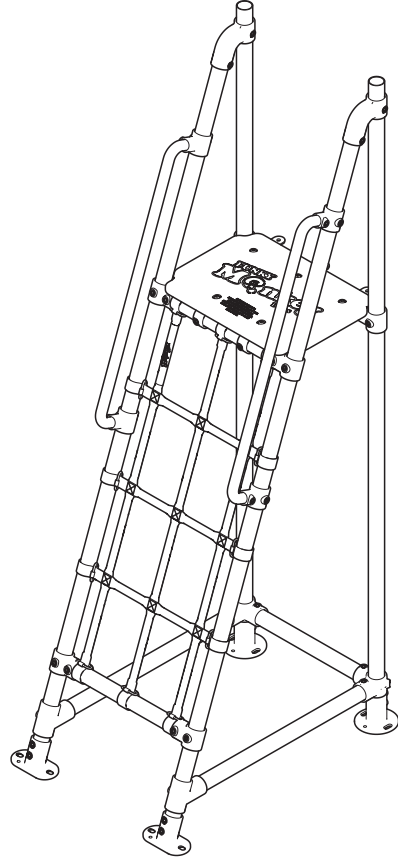



From your T05 - Hardware Kit, use the washers and nuts to secure the platform to the brackets. Make sure the platform is level. Use the 17mm Spanner and the 6mm allen key to fully tighten all bots.

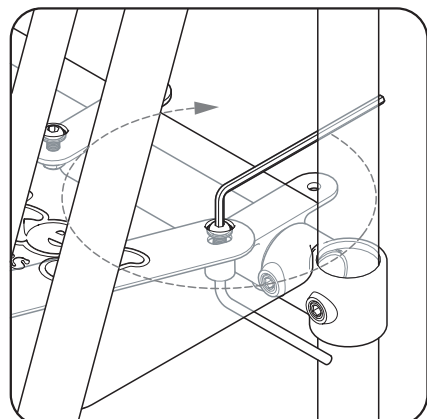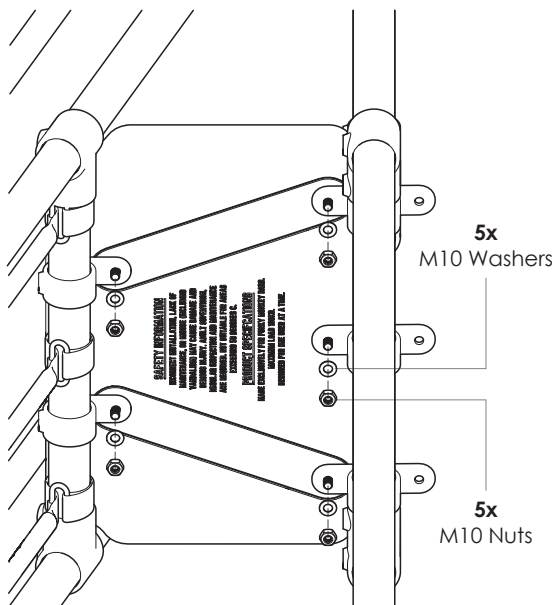



12 ATTACH SLIDE FRAME




Use two people to maneuver the slide frame into position, make sure the tubes align with the short tees on the swing frame. Fully tighten all screws.

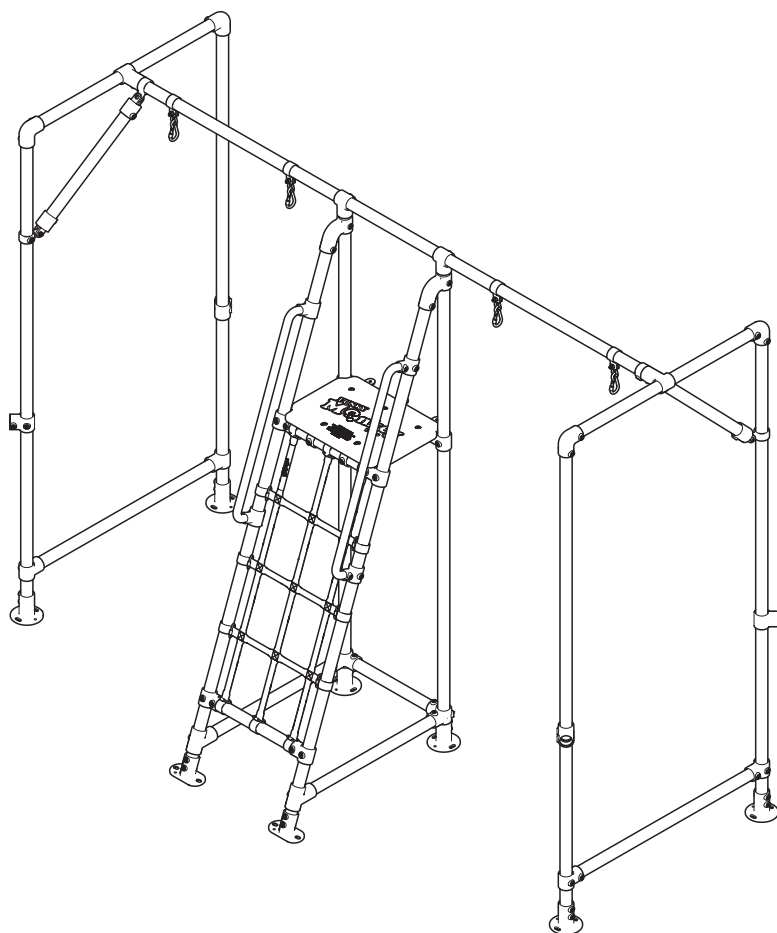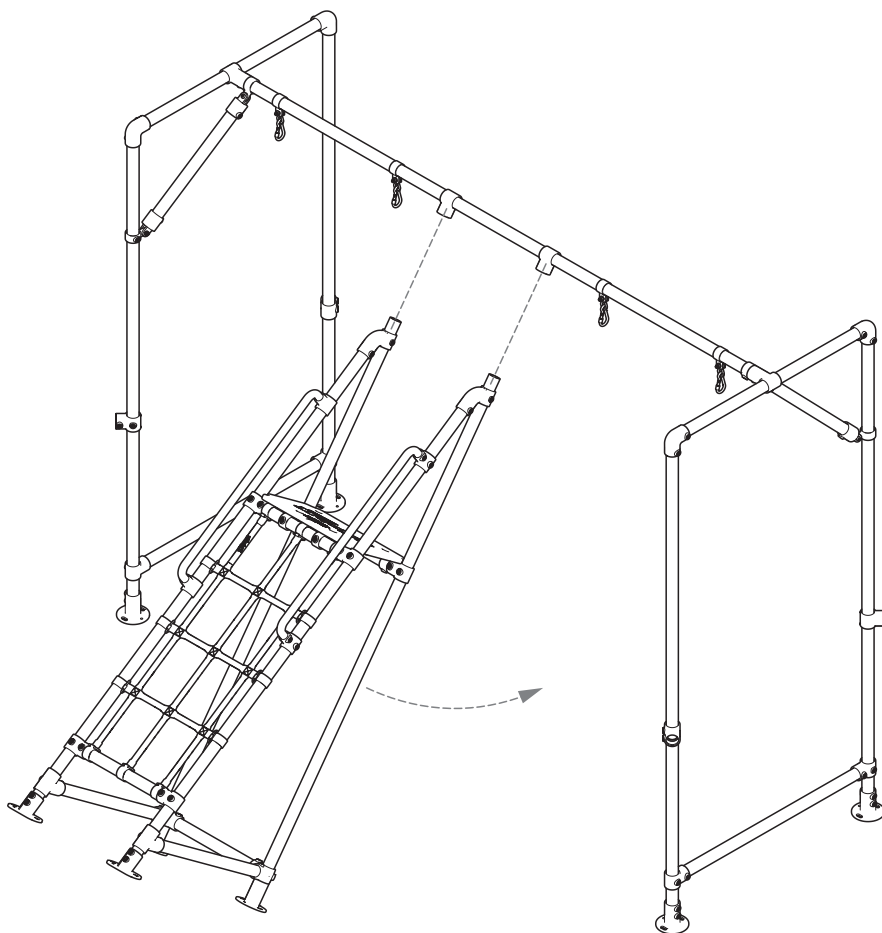

13 ATTACH SLIDE



Using two people, carefully lift the Slide and maneuver it into position.

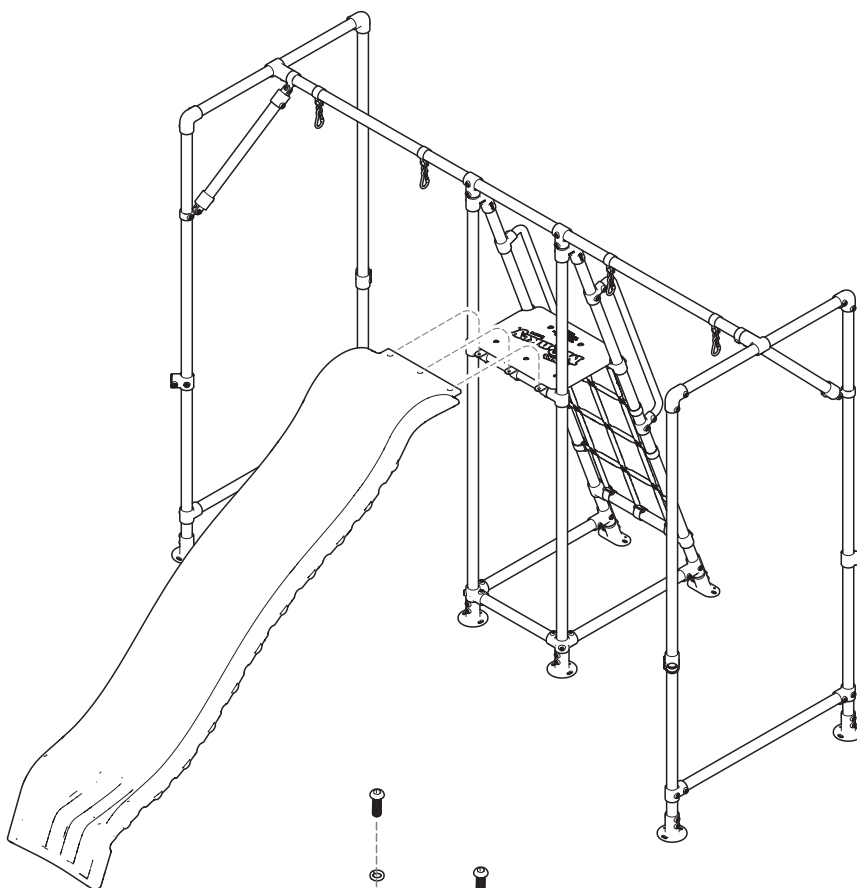


Attention

From your T05 - Hardware Kit, use the washers and nuts to secure the slide to the brackets. Use the 17mm Spanner and the 6mm allen key to fully tighten all bolts.


3x
M10 x 35mm Bolts

3x
M10 Washers

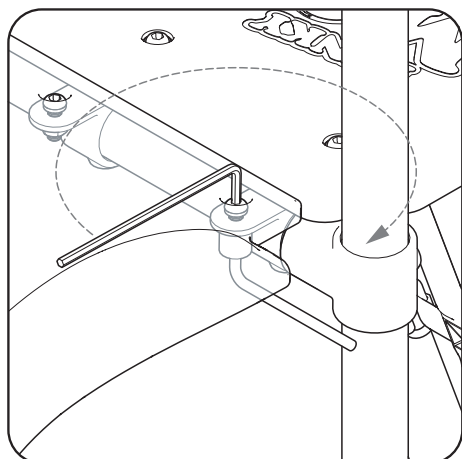


3x
M10 Washers




3x
M10 Nuts

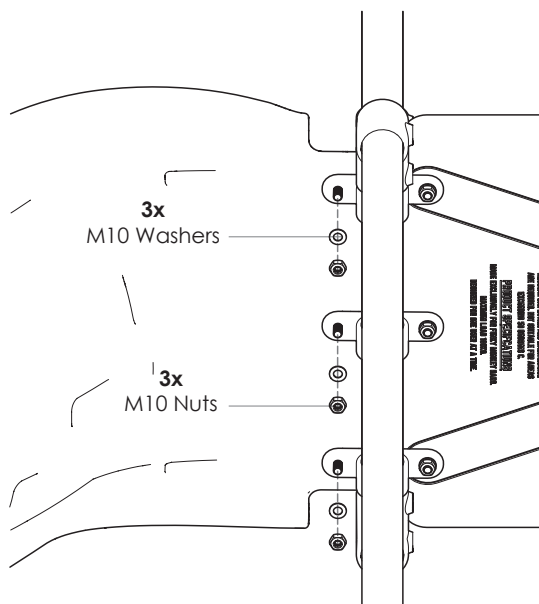


14 INFILL PANELS



Open your infill panel bag and align your panels to the frame. The position of the buckles face inwards, towards the frame. Loop the bungee cords around the buckles to secure the panels to the frame. Two larger bungee cords are supplied to loop around the top.

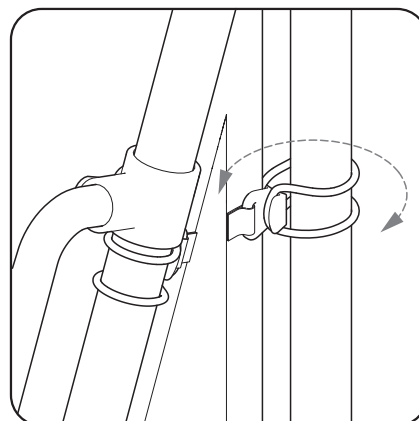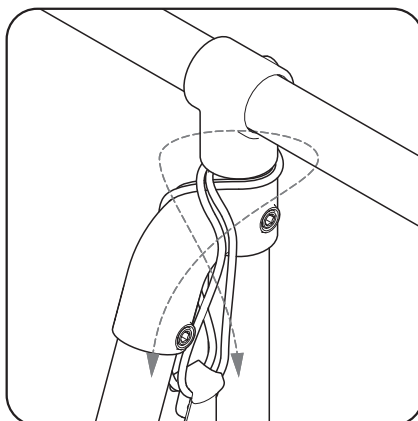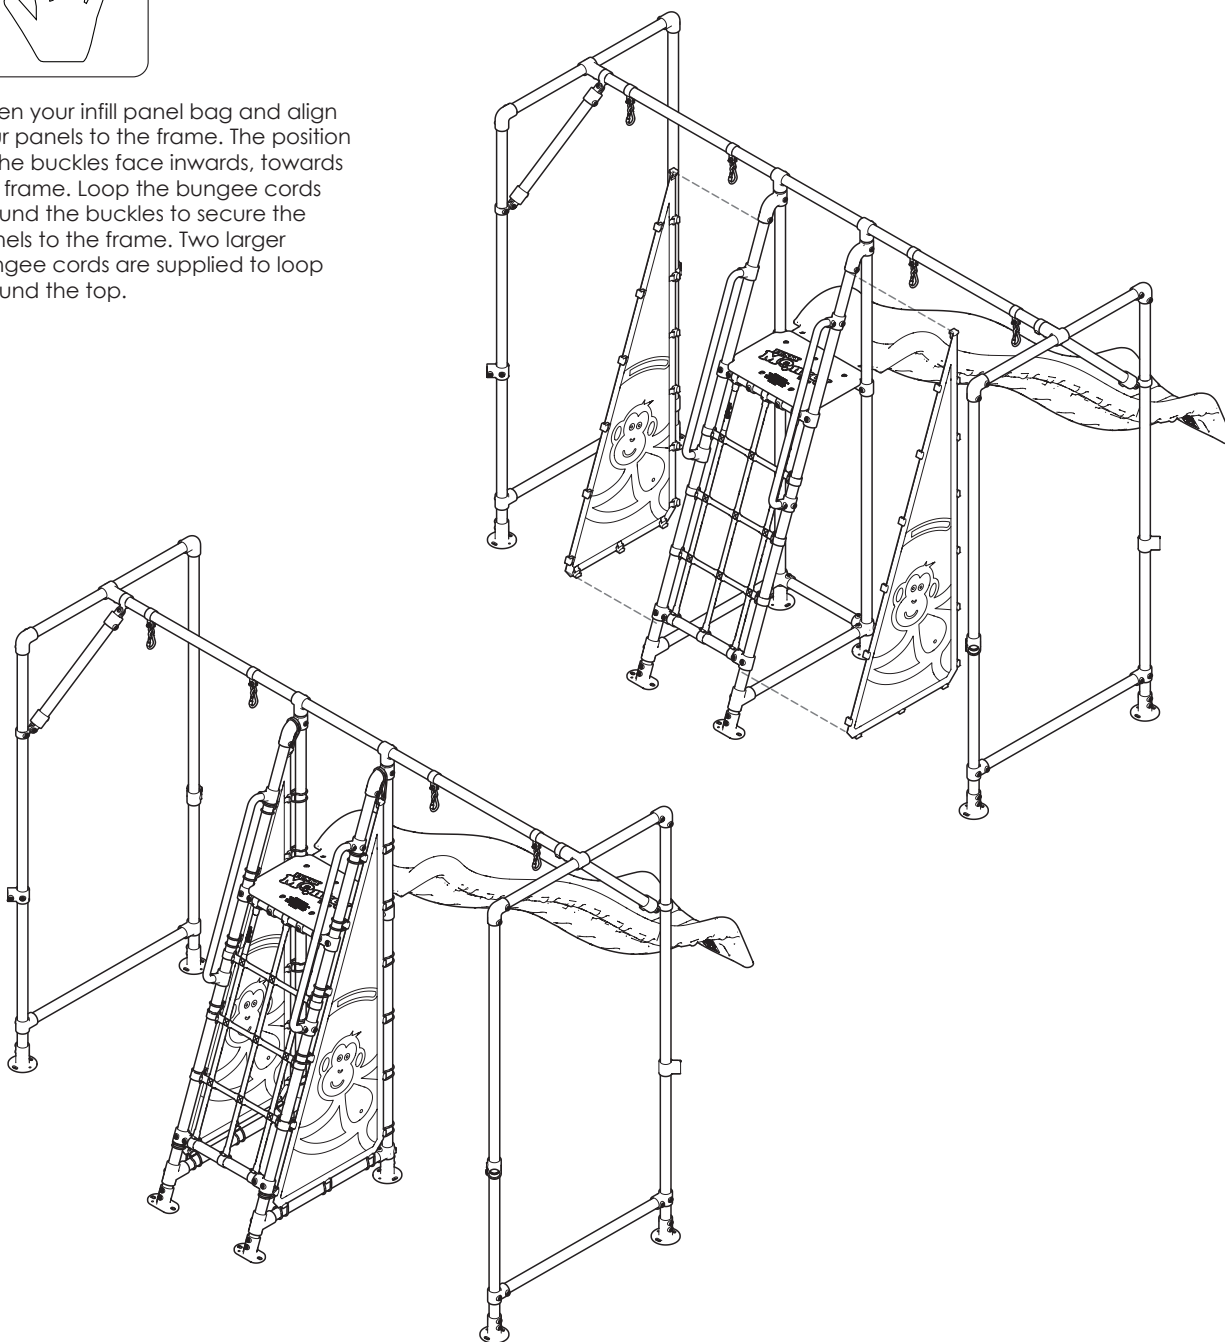

15 ATTACH TWIRLY WHIRLY BARS




Assemble four twirly whirly bars. Attach the twirly whirly bars as illustrated below. Rotate 45 degrees outwards and fully tighten all screws.

1x
Elbow
125-D48

1x
Large Base Plate
131L-D48


2x
Tube
48Dia x 900mm

X4

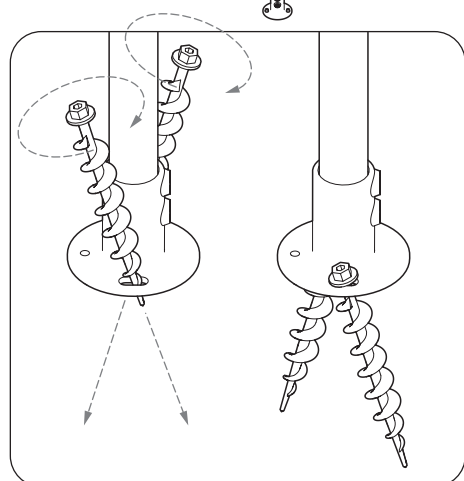


Secure the twirly whirlys in place with the spiral pegs.

16 LOAD YOUR TWIRLY WHIRLY BARS x4


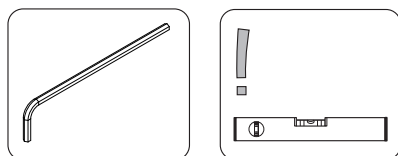


To reduce movement in your frame load your twirly whirly bars as follows.

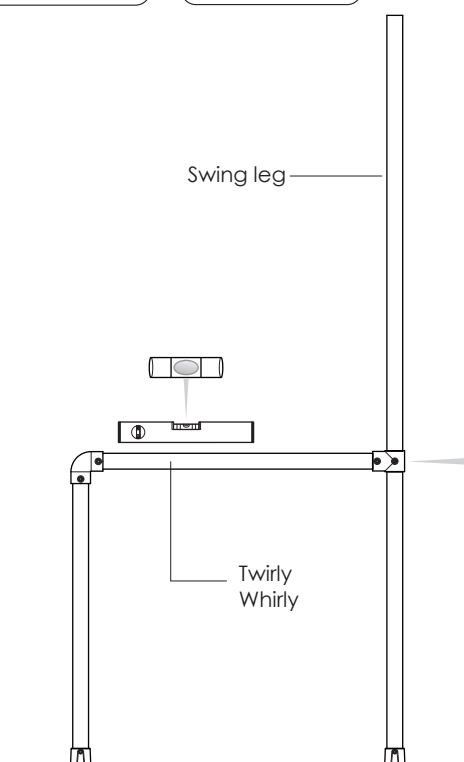


1. Ensure twirly whirly is level and square & swing leg is pegged down.


2. Loosen the grub screw fixing the short tee to the swing leg.

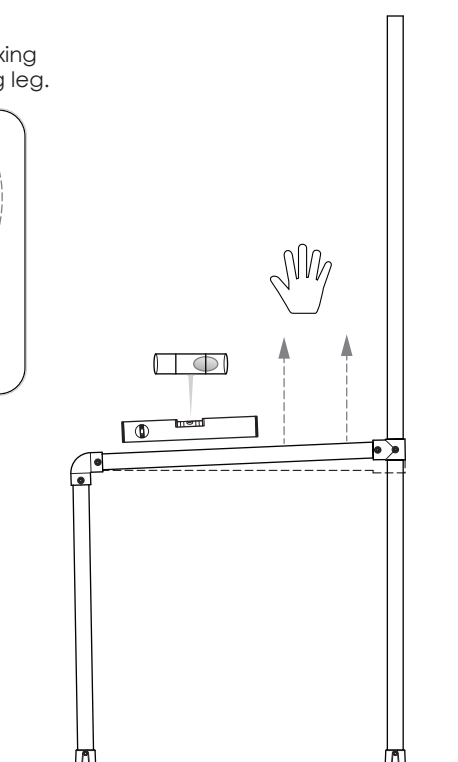


3. Pull upwards on the twirly whirly bar to make a slight angle. (Half a bubble off center on the level)



4. Peg down base plates on twirly whirly.

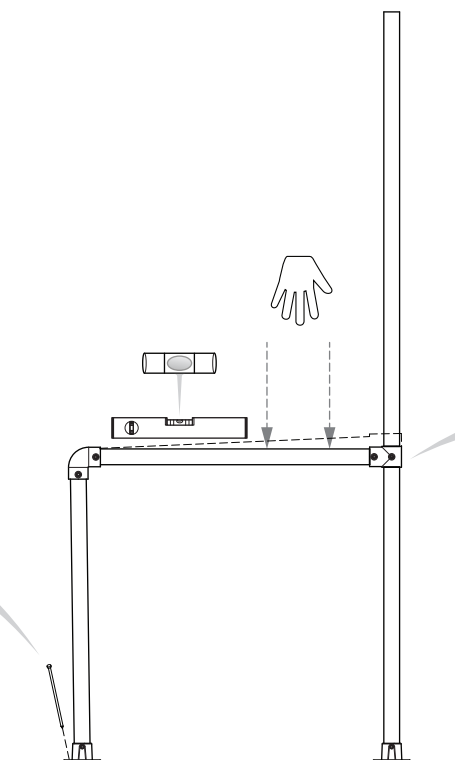



5. Push down on the twirly whirly bar until horizontal bar is level.

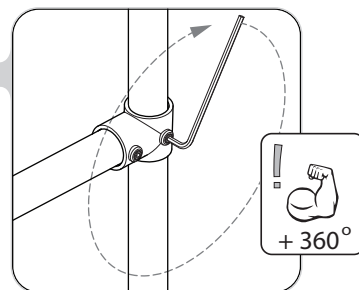

6. Tighten grub screw fixing the short tee to the swing leg tube. Apply to all twirly whirlys.

REFER TO VIDEO SECTION OF WEBSITE [HTTP://WWW.FUNKYMONKEYBARS.COM/PAGES/VIDEOS](http://www.funkymonkeybars.com/pages/videos)

17 MAINTENANCE.



At the beginning of each heavy play session (especially a party) and twice a month during play season ensure;

1. Tighten all hardware - grub screws, nuts and bolts.
2. Pegs are in place and fully secure.
3. Lubricate all metallic moving parts with WD40 or Vaseline - (trolley and swing hooks.)
4. Ensure your frame is level and square.

FAILURE TO DO SO COULD RESULT IN SERIOUS INJURY OR DEATH.

**FOR MORE INFORMATION AND ASSEMBLY TIPS
PLEASE REFER TO OUR WEBSITE VIDEO INSTRUCTION SECTION AT
[HTTP://WWW.FUNKYMONKEYBARS.COM/PAGES/VIDEOS](http://www.funkymonkeybars.com/pages/videos)**

18 HAVE FUN





ABN 72 164 496 520



1300 912 198



info@funkymonkeybars.com



www.funkymonkeybars.com



8/307 Stock Road,
O'Connor WA 6163



WE ARE SOCIAL MONKEYS



Australian Government
IP Australia

All Funky Monkey Bars® designs are registered
and protected under IP Australia certification.