Installation manual and care guide

MB09

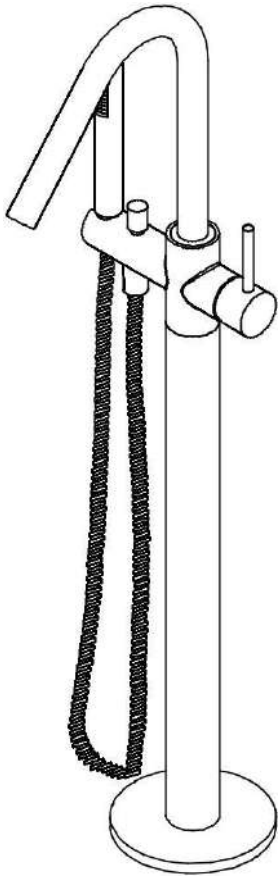

!

hot

Check and adjust the level
after tightening bolts.

cold

hot

Remove the cover plate

cold

hot

Install the water test parts

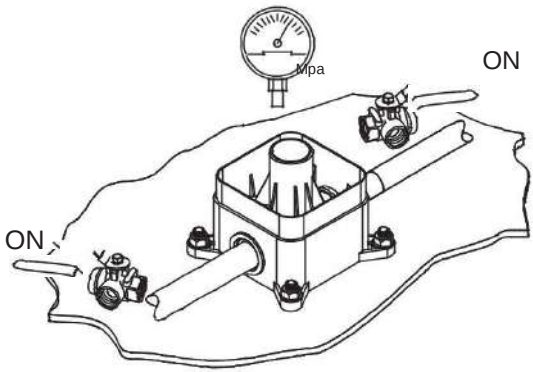

Turn the water on below 0.8Mpa of pressure. Maintain for 30 minutes and check for water leaks.

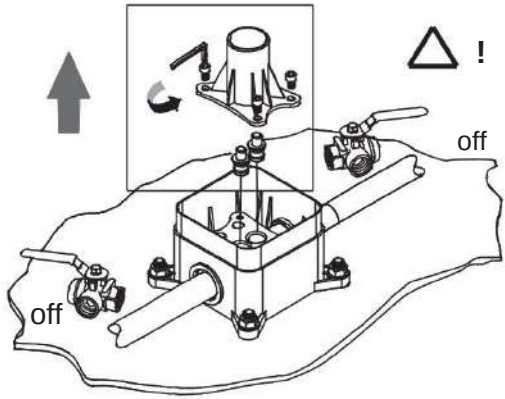

Caution:
Decompress the water before unfastening screws

Turn off the water and remove the testing parts.

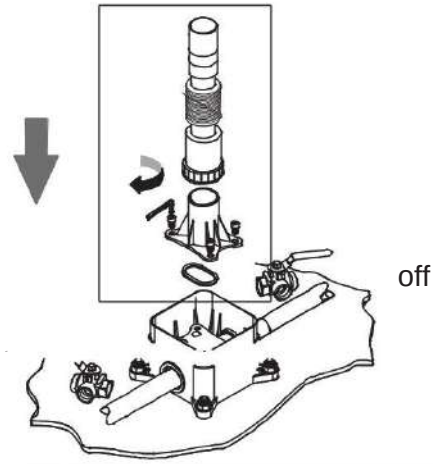

Install the pipe cleaning parts.

Underground components installation

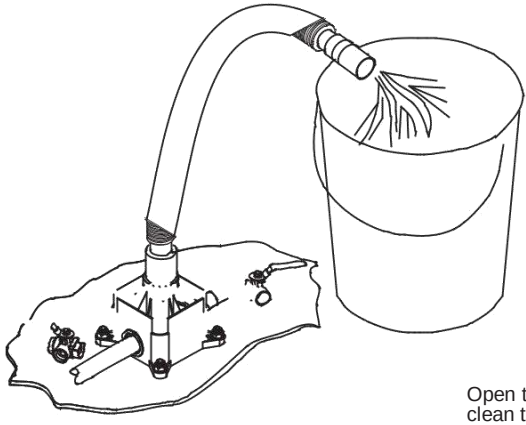

Open the valve to flush the water and clean the pipes.

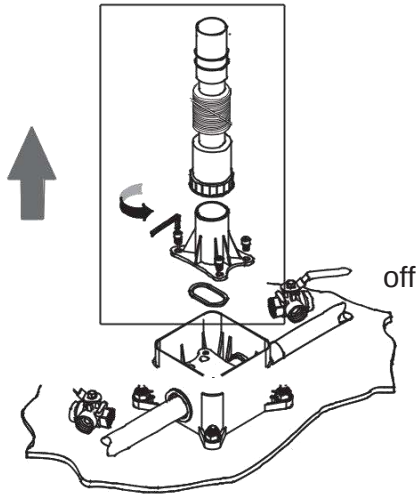

Turn off the valve and remove the pipe cleaning parts.

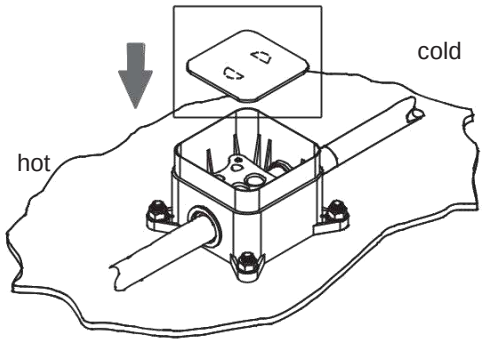

Replace the cover

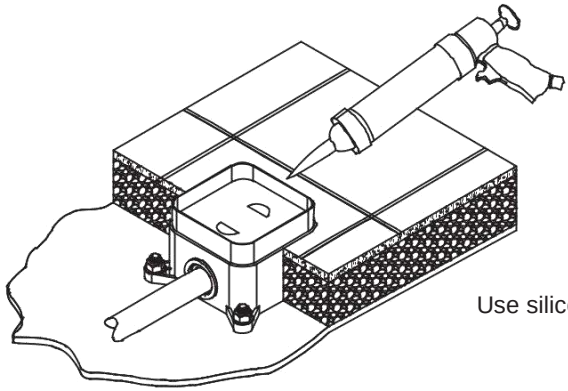

Use silicon to close tile gaps.

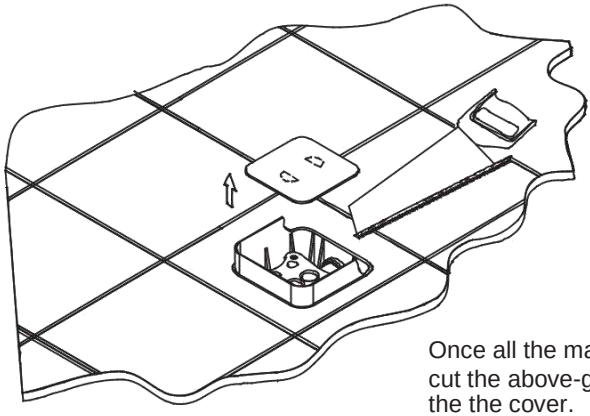

Once all the materials have dried,
cut the above-ground parts and remove
the the cover.

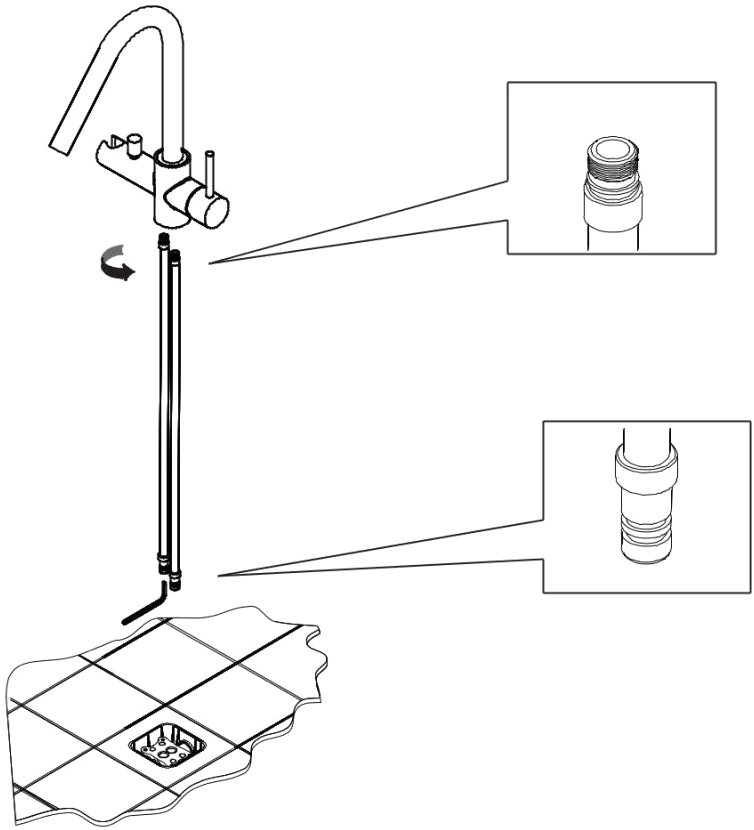

take out the 2 water inlet pipes from the packing box, fasten them onto the spout.

CAUTION: One end with thread should be upward, another end with 2 rubber rings is downward.

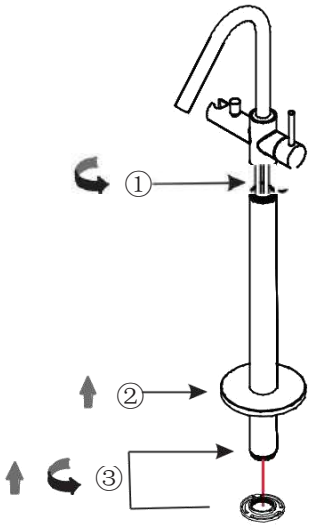

① Fasten the spout to the connection pipe.
② Install the rosette and be careful to avoid scratching.

③ Fasten the brass nut to the Body. Use thread glue if required.

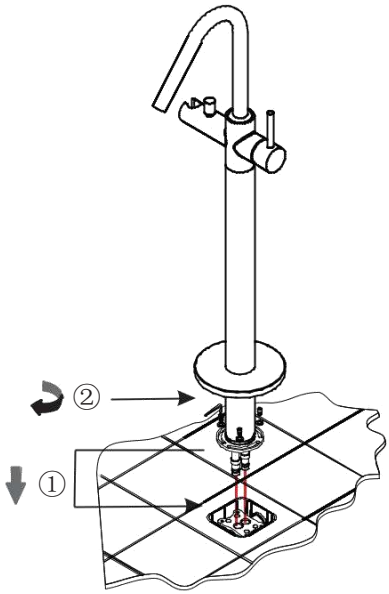

① Insert the 2 water pipes in the tap holes in the plastic box underground.

② Fasten the brass nut with 4 screws.

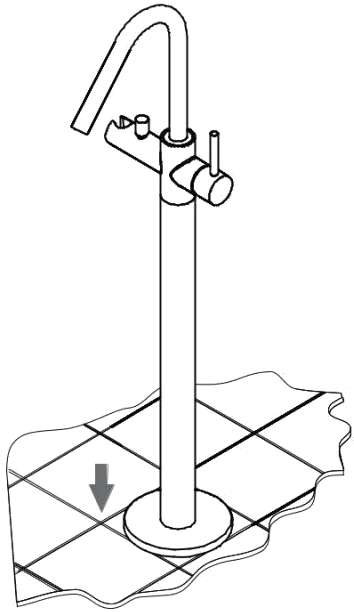

Push the rosette smoothly and firmly down.

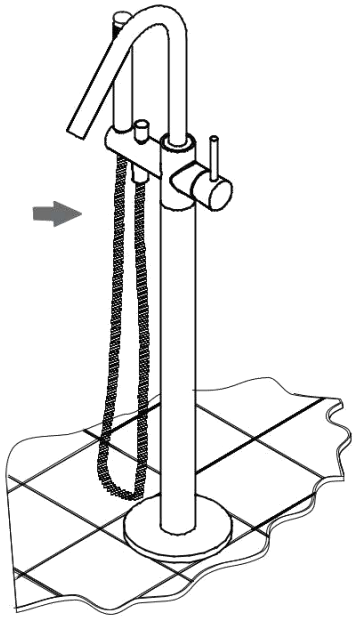

Install the hand shower and hose.

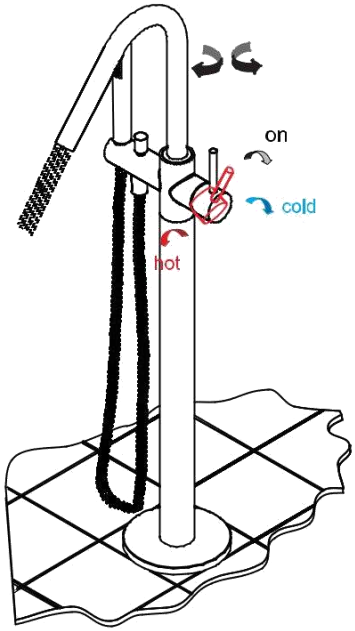

The unit can be rotated 360°

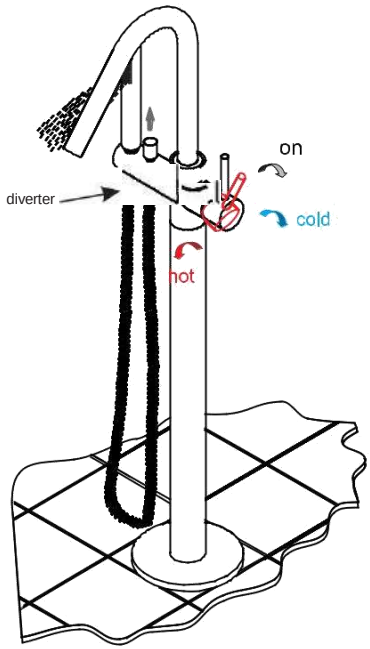

Switch between the spout and hand shower by using diverter.