

## PiXAPRO Recessed Softbox ASSEMBLY INSTRUCTIONS

# ASSEMBLY INSTRUCTIONS

## Softbox Parts.



## The Speedring



The Speedring is made up of two parts. The Outer Ring (which is where the rods which form the basic structure of the softbox go into), and the Inner Ring, (which features they Bayonet fitting which enables you to mount your softbox to your light).

This speedring is designed so that the Inner ring can be switched out for a different ring, which is ideal for people who own more than one flash system, or are thinking about switching flash brands.

To change the inner ring, simply remove one of the retaining thumb-screws and the ring the ring should come out (You may have to loosen the other screws, but you only really need to remove one).

## Inner Rings Are Available in The Following Fittings:



## Key



- Rectangular Softbox
- Strip Softbox
- Square Softbox
- Octagonal Softbox

This Key shows you which holes on the speedring are used for which style of softbox you assembling

# ASSEMBLY INSTRUCTIONS

## Step 1.



Take one of the rods, and feed the smaller end through the one of the guide-loops located along the internal seam of the softbox backing material.

## Step 2.



Once you have fed the rod through the guide loop (if your softbox has them), insert the tip of the rod into the small pocket, located at the outer-edge of the softbox backing material.

## Step 3.



Now insert the larger tipped end of the rod into hole in the speed ring (please refer to Key on the previous page for which holes to use).

## Step 4.



Once the first rod has been inserted, insert the second rod, diagonally opposite the first, and the same process as before.

# ASSEMBLY INSTRUCTIONS

## Step 5.



Now insert the remaining rods to complete the main structure of the softbox. P.S. Please be aware that the final rod will require a bit more force to insert than the rest due to added tension from the other three rods.

## Step 6.



Now that the main structure of the softbox is complete, attach the inner-diffuser by using the little clips located at each corner of the inner-diffuser to the small elastic loops located along the internal seam of the softbox backing material.

## Step 7.



Once you have attached the inner diffuser, all that is left to do is attach the outer diffuser. To do this, simply attach it to the inner edge of the Velcro strip that goes around the internal perimeter of the softbox.

## Step 8.



Now all that is left is to attach the honeycomb grid (if you have one). To attach the honeycomb grid, simply press the edges of the grid against the Velcro strip that goes around the internal perimeter of the softbox.

# ASSEMBLY INSTRUCTIONS

## Please Note.




Some of our Softboxes don't have a Velcro strip that goes around the internal perimeter of the softbox, but instead have an external diffuser that stretches over the front of softbox. This type of softbox cannot be used with a grid.

### Rectangular/Square Softbox Video



### Strip Softbox Video

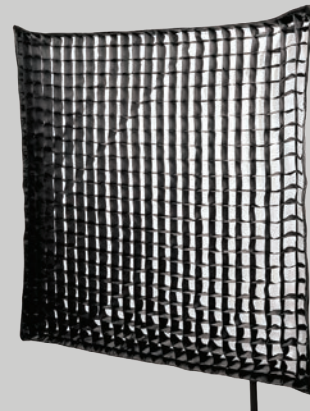

## PIXAPRO® LTD

50 Popes Lane, Oldbury, West Midlands, B69 4PA  
Tel: 0121 552 3113  
Company Registration No. 07601334  
Web: [www.essentialphoto.co.uk](http://www.essentialphoto.co.uk)  
E-mail: [customerservice@essentialphoto.co.uk](mailto:customerservice@essentialphoto.co.uk)

Facebook: [www.facebook.com/EssentialPhoto.UK](http://www.facebook.com/EssentialPhoto.UK)

Twitter: [www.twitter.com/EssentialPhoto\\_](http://www.twitter.com/EssentialPhoto_)