


Product: AquaTru[®] Pro Series Model ATW-1-FAC, ATW-1-FBAC, and ATW-1-FBLAC. Use Guidelines:

The AquaTru[®] Pro Series water purifier requires regular replacement of all filters to operate properly. The ATW1-F1 Lead, Chlorine, and PFOS/PFOA Filter needs to be replaced every 3000 gallons.

Please Note:

- Not all contaminants listed may be present in your water.
- AquaTru[®] Pro Series may not remove all contaminants that may be present in your tap water.
- AquaTru[®] Pro Series is only to be used with cold water.
- AquaTru[®] Pro Series usage must comply with all state and local laws.
- Testing was performed under standard laboratory conditions, actual performance may vary.
- Systems certified for Cyst reduction may be used on disinfected waters that may contain filterable Cysts.
- Spent absorption media will not be reactivated and used.

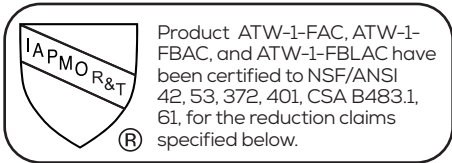

CAUTION! This system has been tested according to NSF/ANSI 42, 53, 372, 401, CSA B483.1, 61 for reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42, 53, 372, 401, CSA B483.1, 61.

The system is not intended to be used for treating water that is not microbiologically unsafe or of unknown quality without adequate disinfection before the system.

Operating Parameters	Imperial	Metric Units
Input Power	120 Volt ~ 60 Hz	120 Volt ~ 60 Hz
Rated Flow Rate	1 GPM	3.78 LPM
Working Pressure	20 - 100 PSI	137 - 690 kPa
Temperature	40-100° F	5-38° C
Inlet Water Quality Limits		
Total Dissolved Solids (TDS)		1500 mg/L
Maximum Hardness	10 gpg	(171 mg/L)
Sulphide, Iron & Manganese:		<0.1 mg/L
Chlorine	<2 ppm	<2 ppm
pH		3-11
Turbidity		5 NTU Max.

NSF/ANSI 53 Substance	Influent Challenge	Maximum Permissible Product Water Concentration	Reduction Requirement (%)	Minimum Reduction (%)	Average Reduction (%)
Lead (8.5 pH) (6.5 pH)	150 +/- 10% µg/L 150 +/- 10% µg/L	5 µg/L 5 µg/L	NA NA	99.76% 99.3%	99.54% 98.8%
Cyst*	Minimum 50,000/L	N/A	99.95%	99.98%	99.99%
PFAS+PFOS	0.0015 +/-20% mg/L	0.02 µg/L	NA	99.3%	99.7%

* Includes Giardia Lamblia, Entamoeba Histolyca, and Crypto Soporidium.

NSF/ANSI 42 Substance	Influent Challenge Concentration	Product Minimum Reduction
Chlorine Reduction, Free Available)	2.0 +/- 0.2ppm	99.1%
Chloramine	3 +/-0.3 mg/L	88.96%
Particulate Class 1	Minimum 10,000 Particles/mL	95.5%

NSF/ANSI 401	Reduction Requirement	Influent Challenge Concentration	Average Reduction
Microplastics, Particles 0.5 to < 1 µm	≥ 85%	1400000 Particles/mL	95.50%