meir.

FEATURES

- · Refer to the Meir website for warranty terms & conditions, and available finishes
- Flow rate 6 L p/m
- · European components and cartridge
- · Cold start cartridge technology
- · Solid brass construction

CARE

- · Do not install tapware using any form of acetone silicones.
- · Do not apply physical items (such as tools) directly to product.
- · Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- · Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- · Check for any product defects before installation.
- · Refer to the installation manual for correct installation.


166.05 258.1 Ø 19 183. 94 99.07 Ø7 Ø40 50 Ø50

SPECIFICATIONS






Qty.



FLOW RATE GRAPH

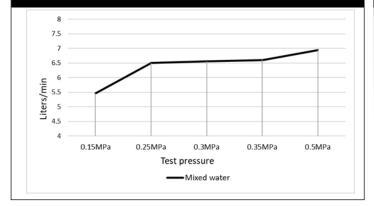

CREDENTIALS

- Watermark AS/NZS3718WMKA25013
- WELS Rated 5 Star

EXPLODED VIEW

