

Features

- Single Lever Handle Allows for Both On/Off Activation
- Ceramic Disc Valves Exceed Industry Longevity Standards for a Lifetime of Durable Performance
- 1.8 gal/min (6.84 l/min) Maximum Flow Rate [Max at 60 psi (4.1 bar)]
- Hot/Cold Indexing on Handle
- Flexible Supplies for Simplified Installation
- Backflow Protection
- Pull Out Sprayer

Material

- Ceramic Cartridge
- Premium Metal Construction
- Finishing Resists Corrosion and Tarnishing

Installation

• Single Hole

Codes/Standards

• ADA Compliant

LADA COMPUSAT	H

Available Color/Finis	hes
Intended for reference o	only






Brushed Nickel







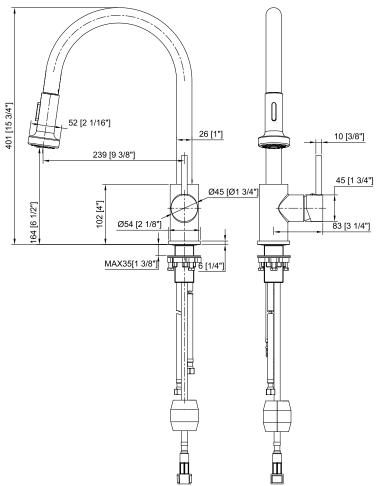

Technical Information

All product dimensions are nominal

- Spout Length: 9 3/8"
- Spout Height: 6 1/2"
- Overall Height: 15 3/4"
- Flow Rate: 1.8 gal/min (6.84 l/min)
- Pressure: 60 psi (4.1 bar)
- Valve Body: Lead Free Brass
- Drain Included: No

Installation Information

Install this product according to the installation instructions.

Limited Lifetime Warranty

See website for detailed warranty information.

6140 Ulmerton Road Clearwater, FL 33760 Phone: (727) 388-9895 Fax: (727) 362-1281 For the most current Specification Sheet, go to www.pelicansinks.com

