




CONNECTIONS MADE SIMPLE

**NEW SPACE-SAVING
WEBSTONE EXCLUSIVES**

PRESS × THREADED VALVES AND FITTINGS

- Press × FIP and Press × MIP options
- Lead-free forged DZR brass construction
- Saves space and eliminates leak paths
- Compatible with popular press tools
- Valves include reversible handle for added versatility
- Items in sizes 1/2" - 2" with reducing options

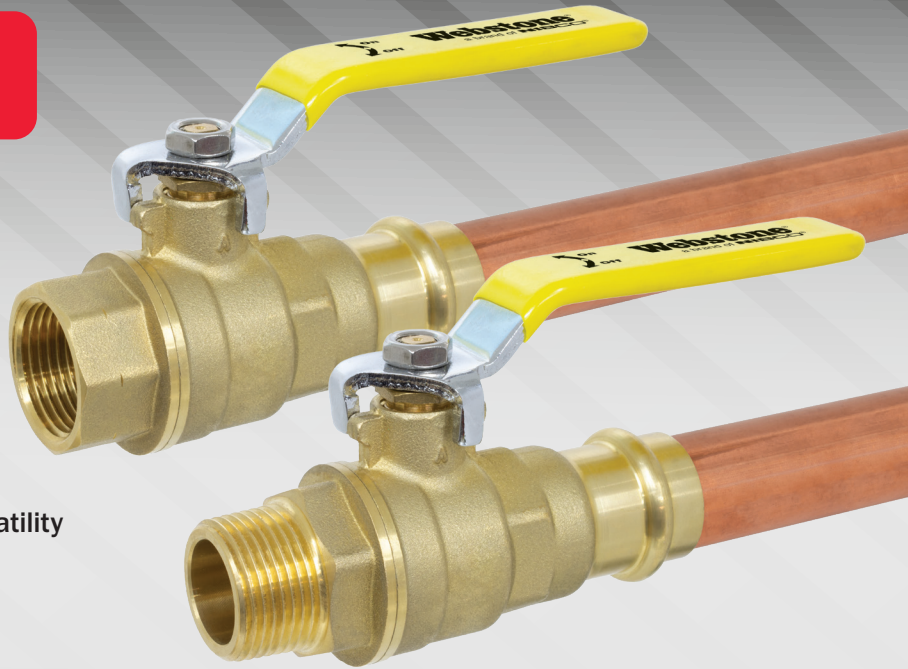


TRANSITION BALL VALVES
w/reversible handle

FORGED DZR BRASS 90° TRANSITION ELBOW

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372 - PS117

SIZE	ITEM#	CTN/CASE	CASE WT
Press × FIP 250 PSI CWP MAX/250°F Max			
1/2"	H-86442W	32/128	22
1/2"×3/8"	H-86442W-R	32/128	17
1/2"×3/4"	H-86442W-RX	32/128	30
3/4"	H-86443W	32/128	37
3/4"×1/2"	H-86443W-R	32/128	30
3/4"×1"	H-86443W-RX	32/96	35
1"	H-86444W	32/96	44
1"×3/4"	H-86444W-R	32/96	36
Press × MIP 250 PSI CWP MAX/250°F Max			
1/2"	H-86242W	32/128	21
1/2"×3/8"	H-86242W-R	32/128	18
1/2"×3/4"	H-86242W-RX	32/128	28
3/4"	H-86243W	32/128	37
3/4"×1/2"	H-86243W-R	32/128	31
3/4"×1"	H-86243W-RX	32/96	36
1"	H-86244W	32/96	44
1"×3/4"	H-86244W-R	32/128	44

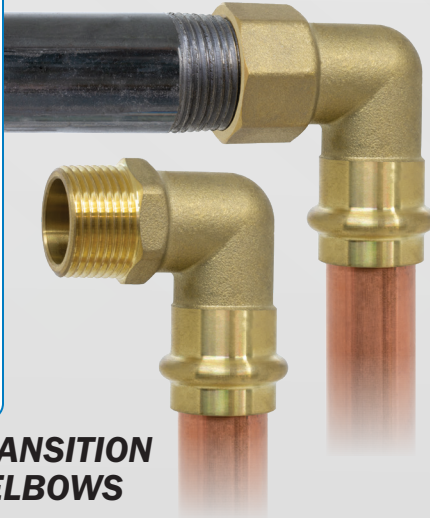

**TRANSITION
ELBOWS**

FULL PORT FORGED DZR BRASS BALL VALVE

w/ Reversible Handle & Adjustable Packing Gland

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372

SIZE	ITEM#	CTN/CASE	CASE WT
Press × FIP 250 PSI CWP MAX/250°F Max			
1/2"	H-84702W	5/50	25
3/4"	H-84703W	5/40	30
1"	H-84704W	4/24	30
1 1/4"	H-84705W	5/20	40
1 1/2"	H-84706W	4/16	39
2"	H-84707W	2/8	33
Press × MIP 250 PSI CWP MAX/250°F Max			
1/2"	H-82702W	5/50	27
3/4"	H-82703W	5/40	33
1"	H-82704W	4/24	33
1 1/4"	H-82705W	5/20	44
1 1/2"	H-82706W	4/16	42
2"	H-82707W	2/8	35


**TRANSITION
FITTINGS**

FORGED DZR BRASS TRANSITION FITTING

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372 - PS117

SIZE	ITEM#	CTN/CASE	CASE WT
Press × FIP 250 PSI CWP MAX/250°F Max			
1/2"	H-86402W	30/120	14
1/2"×3/8"	H-86402W-R	30/120	11
1/2"×3/4"	H-86402W-RX	30/120	18
3/4"	H-86403W	30/120	23
3/4"×1/2"	H-86403W-R	30/120	18
3/4"×1"	H-86403W-RX	30/120	30
1"	H-86404W	30/120	31
1"×3/4"	H-86404W-R	30/120	26
Press × MIP 250 PSI CWP MAX/250°F Max			
1/2"	H-86202W	30/120	13
1/2"×3/8"	H-86202W-R	30/120	11
1/2"×3/4"	H-86202W-RX	30/120	18
3/4"	H-86203W	30/120	22
3/4"×1/2"	H-86203W-R	30/120	18
3/4"×1"	H-86203W-RX	30/120	33
1"	H-86204W	22/88	34
1"×3/4"	H-86204W-R	30/120	23

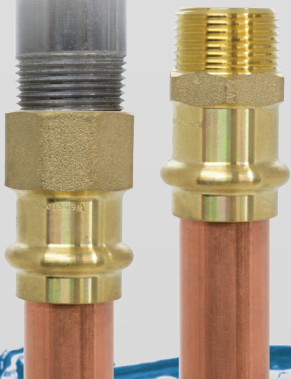

Webstone[®]
a brand of **NIBCO**[®]

**VALVE INNOVATION
INSTALLATION SOLUTIONS**

www.webstonevalves.com




WARNING: Cancer and Reproductive
Harm - www.P65Warnings.ca.gov

LEAD-FREE: Weighted average lead content ≤ 0.25%

CONNECTIONS FOR EVERY JOB

NOW WITH PRESS CONNECTIONS

BALL VALVE W/ BLEEDER & REVERSIBLE HANDLE

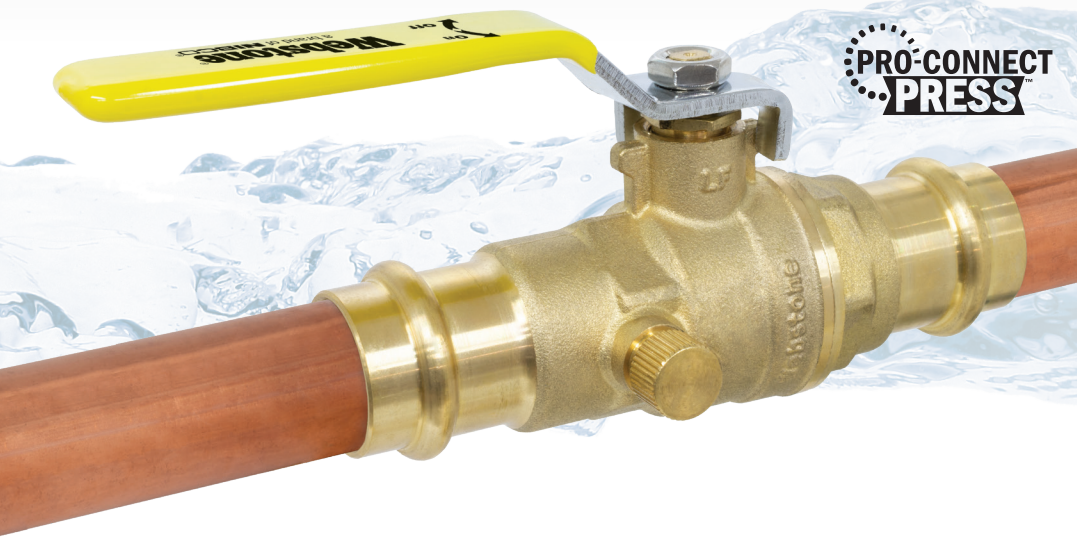

PRO-CONNECT PRESS

FULL PORT FORGED DZR BRASS BALL VALVE
w/ Bleeder, Reversible Handle & Adjustable Packing Gland

LEAD-FREE BRASS

Certified to NSF/ANSI 61-G

SIZE	ITEM#	CTN/CASE	CASE WT
FIP 600 PSI CWP Max/150 WSP			
1/2"	H-40622W	15/120	60
3/4"	H-40623W	12/48	36
1"	H-40624W	8/32	38
SWT 600 PSI CWP Max/150 WSP			
1/2"	H-50622W	25/100	49
3/4"	H-50623W	10/40	31
1"	H-50624W	6/24	29
Press* 250 PSI CWP Max/250°F Max			
1/2"	H-80622W	4/40	24
3/4"	H-80623W	4/32	25
1"	H-80624W	3/15	21

CERTIFIED TO NSF/ANSI 61 & 372

UNION BALL

Full Port Forged DZR Brass Ball Valve w/ Single Union End & Adjustable Packing Gland

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372

SIZE	ITEM#	CTN/CASE	CASE WT
FIP Union × FIP 250 PSI CWP Max/200°F Max			
1/2"	H-40422W	5/40	35
3/4"	H-40423W	4/32	41
1"	H-40424W	4/20	37
1 1/4"	H-40425W	4/12	34
1 1/2"	H-40426W	2/8	32
FIP Union × SWT 250 PSI CWP Max/200°F Max			
1/2"	H-50422W	5/40	33
3/4"	H-50423W	4/32	40
1"	H-50424W	4/20	36
1 1/4"	H-50425W	4/12	33
1 1/2"	H-50426W	2/8	31
FIP Union × Press 250 PSI CWP Max/200°F Max			
1/2"	H-80422W	5/40	37
3/4"	H-80423W	4/32	43
1"	H-80424W	4/20	34
1 1/4"	H-80425W	4/12	35
1 1/2"	H-80426W	2/8	33
FIP Union × Push 200 PSI CWP Max/200°F Max			
1/2"	H-60422W*	5/40	34
3/4"	H-60423W*	4/32	38
1"	H-60424W*	4/20	38
FIP Union × F1960 PEX 250 PSI CWP Max/200°F Max			
1/2"	H-30422W†	5/40	33
3/4"	H-30423W†	4/32	40
1"	H-30424W†	4/20	36
FIP Union × F1807 PEX 250 PSI CWP Max/200°F Max			
1/2"	H-10422W†	5/40	33
3/4"	H-10423W†	4/32	40
1"	H-10424W†	4/20	36

* CERTIFIED TO NSF/ANSI 61 & 372, NSF/ANSI 14, ASSE 1061

† CERTIFIED TO NSF/ANSI 61 & 372, NSF/ANSI 14

PRO-PAL
SERIES

UNION BALL
TM

NEW LARGER SIZES

- **NEW** 1 1/4" and 1 1/2" options available
- Easily disconnect and replace any portion of a piped system
- Creates cleaner-looking, more efficient installations
- FIP Union with your choice of FIP, SWT, Press, Push, F1960 PEX, or F1807 PEX Connection



WORK SMARTER

SAVE
15
MINUTES

ELIMINATE
2
LEAK PATHS

