


THE **CLEANEST** WAY TO INSTALL ANY **TANKLESS** **WATER HEATER**

**NOW INCLUDES
INTEGRATED GAS
SEDIMENT TRAP**

TWH SERVICE VALVES
E·X·P E2
SPACE SAVING

TWH SERVICE VALVES
E·X·P
COMPLETE

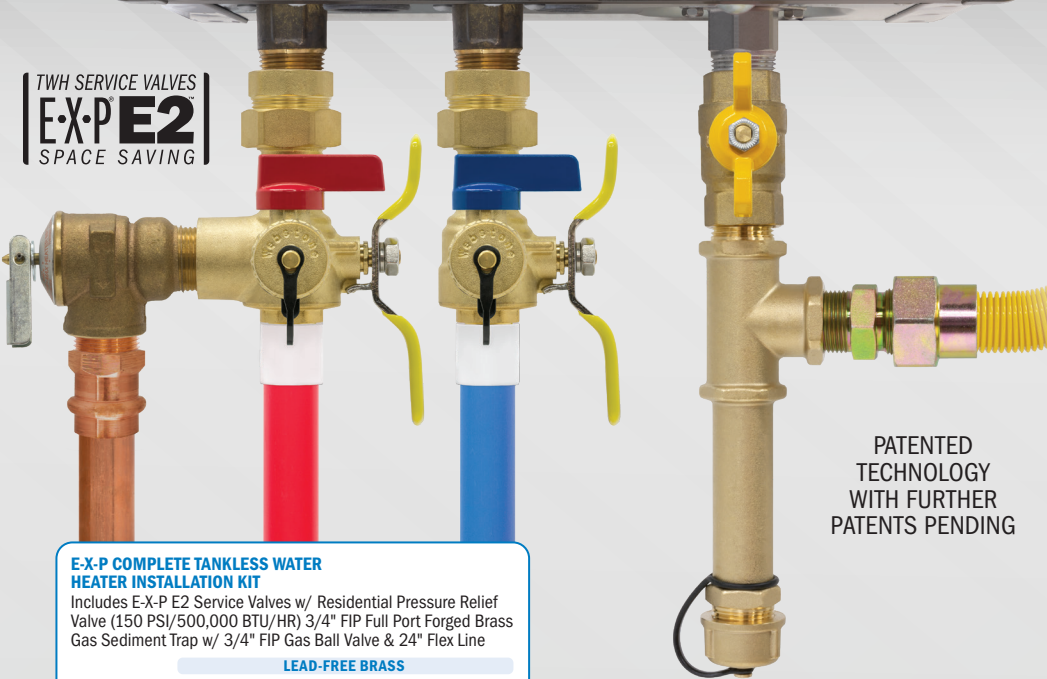

PATENTED
TECHNOLOGY
WITH FURTHER
PATENTS PENDING

- Kits include your choice of TWH service valves with pressure relief valve, integrated gas sediment trap, gas ball valve, and gas flex line
- Results in cleaner looking, consistent quality, more professional installations
- Saves labor and eliminates repetitive field fabrication
- Reduces leak paths

E-X-P COMPLETE TANKLESS WATER HEATER INSTALLATION KIT
Includes E-X-P E2 Service Valves w/ Residential Pressure Relief Valve (150 PSI/500,000 BTU/HR) 3/4" FIP Full Port Forged Brass Gas Sediment Trap w/ 3/4" FIP Gas Ball Valve & 24" Flex Line

LEAD-FREE BRASS
TWH SERVICE VALVES: Certified to NSF/ANSI 61 & 372
GAS COMPONENTS: Flex Line: ANSI Z21.24 & CSA 6.10 - Valve: ANSI Z21.15 & CSA 9.1

SIZE	ITEM#	CTN/CASE	CASE WT
FIP Union x FIP		500 PSI CWP Max/210°F Max*	
3/4"	H-44443WPR-GST	1/4	29
FIP Union x SWT		500 PSI CWP Max/210°F Max*	
3/4"	H-54443WPR-GST	1/4	30
FIP Union x Press		250 PSI CWP Max/250°F Max*	
3/4"	H-84443WPR-GST	1/4	28
FIP Union x Push		200 PSI CWP Max/200°F Max*	
3/4"	H-64443WPR-GST†	1/4	28
FIP Union x F1960 PEX		400 PSI CWP Max/200°F Max*	
3/4"	H-34443WPR-GST†	1/4	29
FIP Union x F1807 PEX		400 PSI CWP Max/200°F Max*	
3/4"	H-14443WPR-GST†	1/4	29

*GAS COMPONENTS RATED AT 1/2 PSI MAX/149°F MAX
†TWH SERVICE VALVES ALSO CERTIFIED TO NSF/ANSI 14, ASSE 1061
‡TWH SERVICE VALVES ALSO CERTIFIED TO NSF/ANSI 14

TWH SERVICE VALVES
E·X·P
ULTRA-COMPACT

**INSTALLS IN
30% LESS
SPACE THAN
THE E-X-P E2**



E-X-P COMPLETE TANKLESS WATER HEATER INSTALLATION KIT
Includes E-X-P Ultra Compact Service Valves w/ Residential Pressure Relief Valve (150 PSI/500,000 BTU/HR) 3/4" FIP Full Port Forged Brass Gas Sediment Trap w/ 3/4" FIP Gas Ball Valve & 24" Flex Line

LEAD-FREE BRASS
TWH SERVICE VALVES: Certified to NSF/ANSI 61 & 372
GAS COMPONENTS: Flex Line: ANSI Z21.24 & CSA 6.10 - Valve: ANSI Z21.15 & CSA 9.1

SIZE	ITEM#	CTN/CASE	CASE WT
FIP Union x FIP		250 PSI CWP Max/200°F Max*	
3/4"	H-42443WPR-GST	1/4	26
FIP Union x SWT		250 PSI CWP Max/200°F Max*	
3/4"	H-52443WPR-GST	1/4	26

*GAS COMPONENTS RATED AT 1/2 PSI MAX/149°F MAX

Webstone[®]
a brand of **NIBCO**[®]

**VALVE INNOVATION
INSTALLATION SOLUTIONS**

webstonevalves.com/EXP



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

LEAD-FREE: Weighted average lead content ≤ 0.25%
©2021 NIBCO INC., All Rights Reserved. **FORM#: EXPC-0721**