

HOT WATER MADE BETTER

WATER HEATER TEMPERING VALVE W/ TEMPERING BY-PASS VALVE

**NOW AVAILABLE W/
PRESS CONNECTIONS**

**PRO-CONNECT
PRESS**

- Compatible with popular press tools

GREATER & SAFER HOT WATER OUTPUT PER GALLON STORED

- Allows water heater to be set at 140°F or higher, minimizing risk of Legionella bacteria in the tank
- Mixes hot output with cold supply, for greater effective hot water storage
- Adjustable temperature control limits output to 120°F to prevent risk of scalding
- Integrated recirculation port simplifies installation

NEW TEMPERING BY-PASS VALVE

- Provides high-temperature untempered water to appliances

Webstone®

a brand of **NIBCO®**

**VALVE INNOVATION
GUARANTEED FOR LIFE**

CONDITIONS APPLY. SEE WEBSTONEVALVES.COM FOR FULL DETAILS.

webstonevalves.com/WHTV



HOT WATER MADE BETTER

WATER HEATER TEMPERING VALVE




WATER HEATER TEMPERING VALVE

Forged DZR Brass Valve w/ 18" Flex Hose Connector, & Integral Check Valve · Outlet Temperature Range 86°-120°F

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372 ASSE 1017, 1070

SIZE	ITEM #	CTN/CASE	CASE WT
MIP × FIP			150 PSI
3/4"	H-74303W	1/9	22
W/ TEMPERATURE GAUGE			
MIP × FIP			150 PSI
3/4"	H-74313W	1/9	26
Press × FIP			150 PSI
3/4"	H-78313W	1/9	26

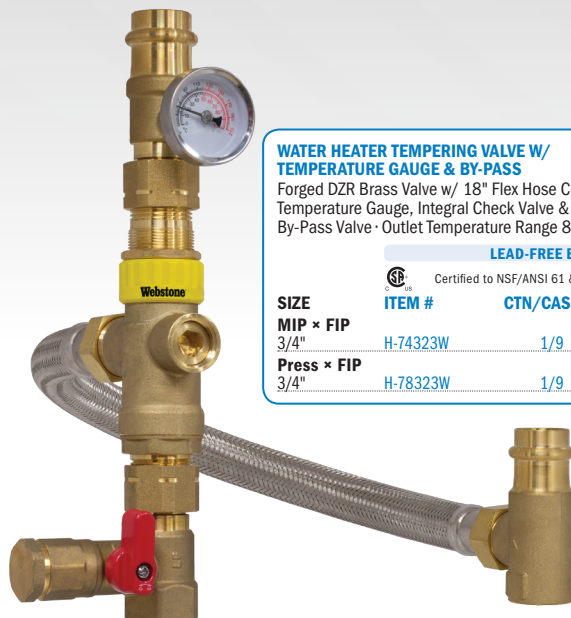

WATER HEATER TEMPERING VALVE W/ TEMPERATURE GAUGE & BY-PASS

Forged DZR Brass Valve w/ 18" Flex Hose Connector, Temperature Gauge, Integral Check Valve & Tempering By-Pass Valve · Outlet Temperature Range 86°-120°F

LEAD-FREE BRASS


Certified to NSF/ANSI 61 & 372 ASSE 1017, 1070

SIZE	ITEM #	CTN/CASE	CASE WT
MIP × FIP			150 PSI
3/4"	H-74323W	1/9	33
Press × FIP			150 PSI
3/4"	H-78323W	1/9	33

TEMPERING BY-PASS
118–194°F
 Supplies high-temp water to appropriate appliances

MIXED HOT
86–120°F
 Increased effective hot storage while preventing risk of scalding

COLD SUPPLY
39–80°F




WATER HEATER TEMPERING BY-PASS VALVE

Forged DZR Brass Valve w/ 1/2" Plugged FIP Port · For Direct Connection to High Temp Appliance

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372

SIZE	ITEM #	CTN/CASE	CASE WT
G3/4 Union × FIP			150 PSI
3/4"	H-G0673W	6/48	34

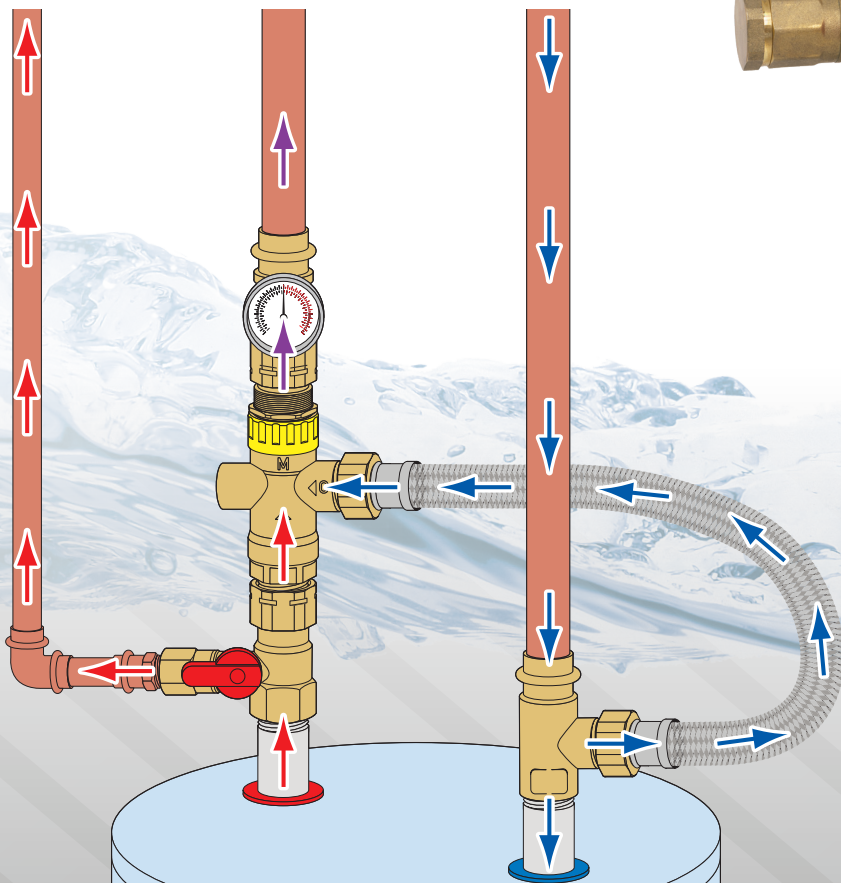

SIMPLIFY THE JOB

Tempering Valve Installation Kits include everything to connect to Copper, CPVC or PEX



PRO-CONNECT
PRO-PUSH

WATER HEATER TEMPERING VALVE INSTALLATION KIT
 Forged DZR Brass Valve w/ 18" Flex Hose Connector, & Integral Check Valve · Outlet Temperature Range 86°-120°F

LEAD-FREE BRASS

Certified to NSF/ANSI 61 & 372 ASSE 1017, 1070, 1061 AMSE A112.18.6 CSA B125.6

SIZE	ITEM #	CTN/CASE	LIST PRICE
INCLUDES (2) 3/4" PROPUSH ITEM# 26033W-18 FLEXIBLE WATER HEATER CONNECTORS			
3/4"	H-74303W-KITA	1/4	14
w/ Outlet Temperature Gauge			
3/4"	H-74313W-KITA	1/4	19
INCLUDES (2) 3/4" PROPUSH ITEM# 62033W-18 FLEXIBLE WATER HEATER CONNECTORS W/ BALL VALVES			
3/4"	H-74303W-KITB	1/4	16
w/ Outlet Temperature Gauge			
3/4"	H-74313W-KITB	1/4	21

*SUPPLY LINES CERTIFIED TO NSF/ANSI 61-G ASSE 1061 AMSE A112.18.6 CSA B125.6

*SUPPLY LINES CERTIFIED TO NSF/ANSI 61-G ASSE 1061 AMSE A112.18.6 CSA B125.6