

New CR 1, 3, & 5 Piping Connections fit any system

Depending on the market and service, a pipe system may need special connections. You may need ANSI flange connections for an industrial application or a clamp connection for ease of removal. Grundfos offers a variety of CR, CRI, and CRN connections to fit any system or application:

- ANSI, DIN, JIS, victaulic etc. standard connections
- threaded oval flange connections
- FlexiClamp connections
- custom connections

Standard connections for the CR

The CR comes with a cast iron flange that is ANSI/DIN/JIS all in one or a threaded oval flange is also provided as standard.

Standard connection for CRI/CRN


For our pump range in complete stainless steel, CRI/CRN comes in three variations as standard:

- the flange connection has a loose ANSI/DIN/JIS flange
- the threaded oval flange is compact and easy to install for CRI
- the victaulic coupling is available for CRN

Another option, the FlexiClamp base, can be delivered with many different custom connections.

Grundfos brings you flexible solutions

The new CR 1, 3, and 5 are fast and easy to install in a compact and user-friendly design. Expanded connection options like the new threaded oval flange make it possible for the CR to fit any industrial application.

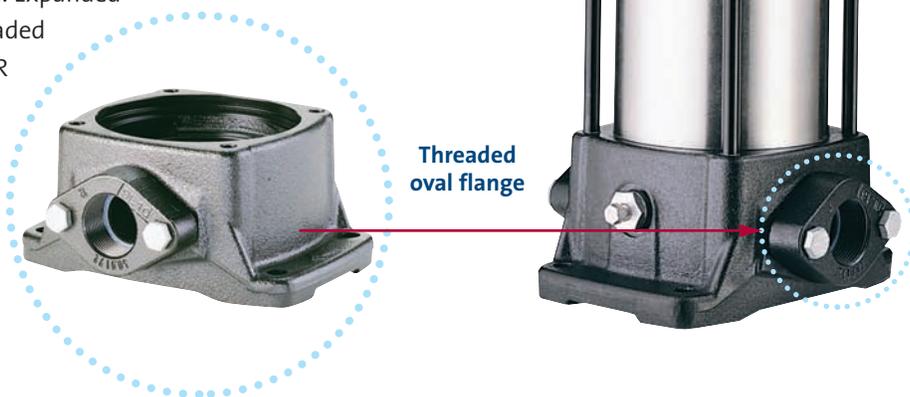

The New CR Connection Range

The new CR 1, 3, and 5 come in five standard connections and a FlexiClamp option.

	CR	CRI	CRN
Flange connection 	STANDARD		
Threaded oval flange 	STANDARD		
Flange connection 		STANDARD	STANDARD
Threaded oval flange on FlexiClamp (stainless steel) 		STANDARD	OPTIONAL
Victaulic coupling 		OPTIONAL	STANDARD
FlexiClamp with multiple options 		OPTIONAL	OPTIONAL

L-CR-SL-006	10/01
PRINTED IN USA	