MZTO1N-R-SET EXPOSED THERMOSTATIC SHOWER RAIL


meir.

FEATURES


- Refer to the Meir website for warranty terms & conditions, and available finishes
- Flow rate 8 L/min at 3 bar pressure.
- European thermostatic cartridge
- · Solid stainless steel construction
- Includes the hand shower, head shower and shower hose.


CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to the product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution. Rinse and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the Installation Manual for correct installation.

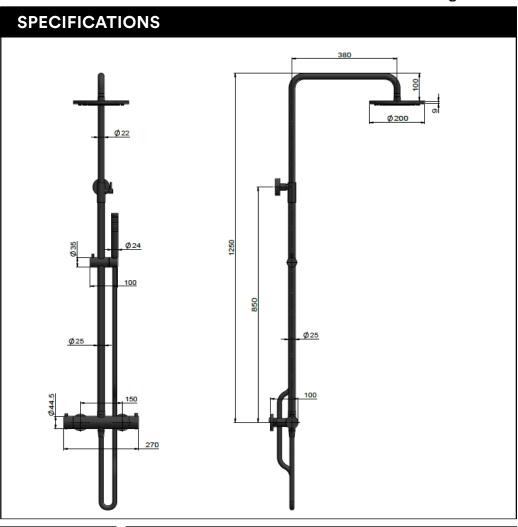


FLOW RATE GRAPH

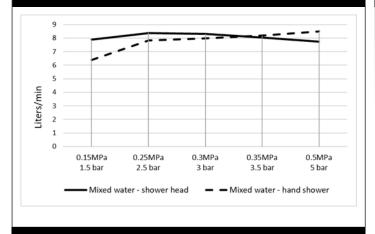

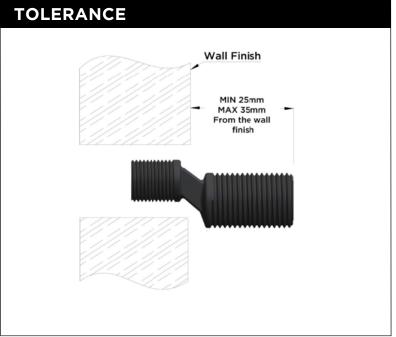

MZTO1N-R-SET EXPOSED THERMOSTATIC SHOWER RAIL

meir.

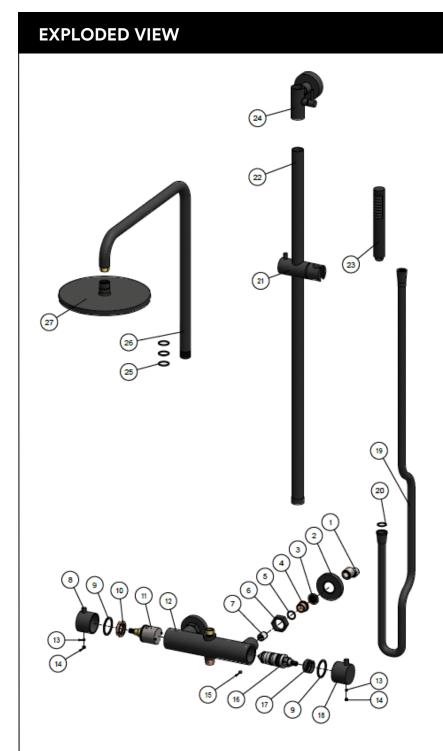

No.	Name Part	Qty
1	Connector	2
2	Cartridge Cover	2
3	Gasket	2
4	Screw	2
5	O-ring	2
6	Lock Nut	2
7	Check Valve	2
8	Reversing Handle	1
9	Wear-Resisting Ring	2
10	Cartridge Nut	1
11	Cartridge	1
12	Body	1
13	Screw	2
14	Rubber	2
15	Screw	1
16	Thermostatic Cartridge	1
17	Sleeve	1
18	Handle	1
19	Shower Hose	1
20	Gasket	2
21	Holder	1
22	Straight Pipe	1
23	Hand Shower	1
24	Holder	1
25	O-ring	3
26	Spout	1
27	Head Shower	1

