MZTO3N EXPOSED THERMOSTATIC HAND SHOWER MIXER

meir.




FEATURES


- Refer to the Meir website for warranty terms & conditions, and available finishes.
- Flow rate 17 L/min at 3 bar pressure.
- European thermostatic cartridge.
- Solid stainless steel construction.
- Excludes the hand shower and shower hose with rail.

CARE


- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools) directly to the product.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution. Rinse and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the Installation Manual for correct installation.

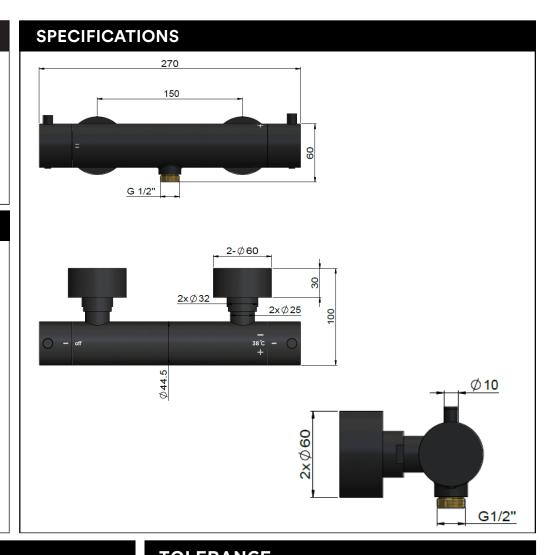

FLOW RATE GRAPH

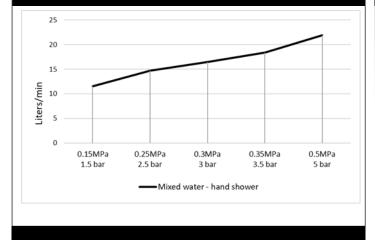

TOLERANCE

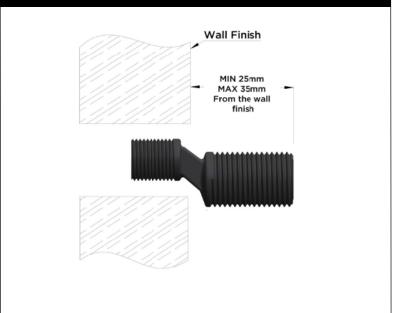

melr.

EXPLODED VIEW

	Name Part	Qty
1	Connector	2
2	Catridge Cover	2
3	Gasket	2
4	Screw	2
5	O-ring	2
6	Lock Nut	2
7	Check Valve	2
8	Override Button	1
9	Wear-Resisting Ring	2
10	Cartridge Nut	1
11	Cartridge	1
12	Body	1
13	Screw	2
14	Rubber	2
15	Screw	1
16	Thermostatic Cartridge	1
17	Sleeve	1
18	Handle	1
	8 9 10 11) (0