

BLADE STAND-ALONE WORKSTATION

Includes Add-Ons: A1 | A2 | A3 | A4


General Installation Guide

EDITION CODE

BL-1 :: Stand-Alone Workstation	
---------------------------------	--

ADD-ONS

A1 :: Surface-Mount Cable Management Tray7
A2 :: Modesty Panel 11
A3 :: Laminate Inset End Panels 15
A4 :: Steel Inset End Panels 23

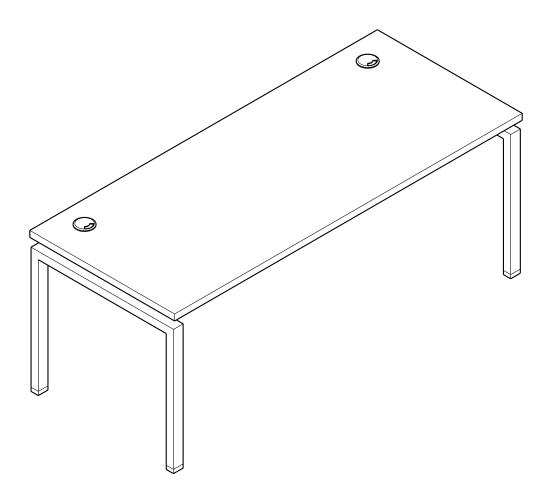

WORKSTATION OVERVIEW

BLADE Stand-Alone


All parts listed are for a single workstation; additional parts will be needed for additional workstations.

CODE	QTY	DESCRIPTION	
GB3072	1	Surface	
BB3	1	Extra Long Beam	()
	2	Lock Plate	
	2	Cap Screw	
	1	Locking Screw and Lever	
BL30	2	BLADE 30" End Leg	Ņ
	12	Wood Screws	(FI) MUR
BASB72	1	42" Support Bar*	
	10	Wood Screws	{] 00000000>

*Part will be added to surfaces 72" and longer


1 | JOIN END LEGS WITH BEAM

Insert beam tabs into leg brackets. Guide beam tabs into bracket holes, ensuring that there is not a gap between the beam and legs. Using a rubber mallet, hammer the beam to lock in place.

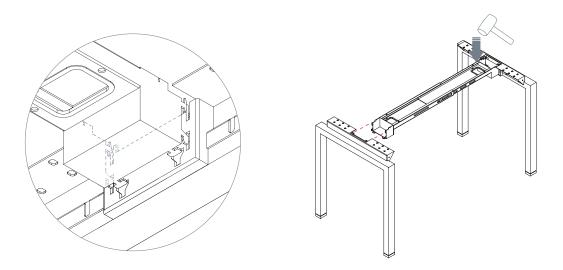


2 | BOLT DOWN BEAM-TO-LEG LOCK PLATE

Note: The beam lock plates will not fit if there is a gap between the beam and the leg.

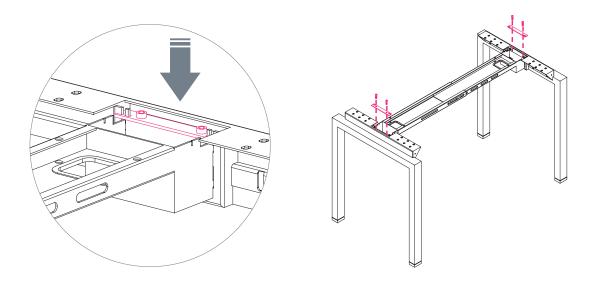


3 | MEASURE AND ADJUST BEAM WIDTH

Measure from end leg to end leg until you find the approximate width of the work surface. Insert the screw through the overlapping beam slots and into the locking screw and lever. Slightly tighten the screw. DO NOT fully tighten. Insert beam grommet covers.

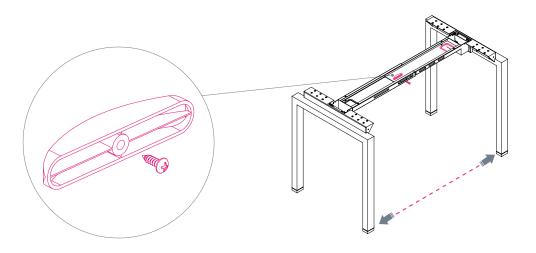


4 | SECURE THE SURFACE

Position the surface on the desk frame. Align the outer sides of the surface flush and parallel with the outer sides of the end legs, adjust if not flushed. Insert wood screws into the leg brackets and secure to the underside of the surface.

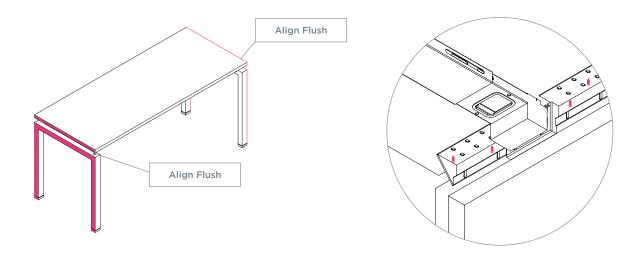


5 | SECURE BEAM


Tighten beam locks.

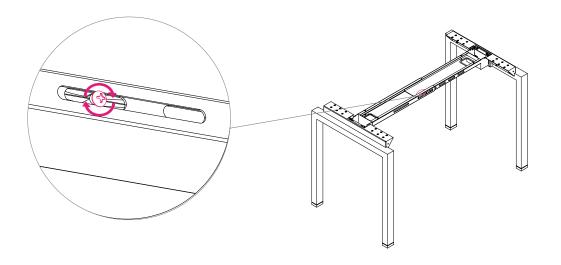

OPTIONAL | INSTALL SUPPORT BAR

If working with a surface 72" or longer, use 10 wood screws to install support bar under the surface.

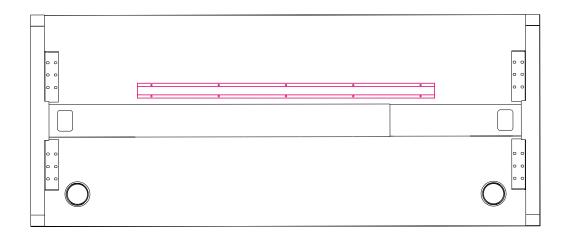

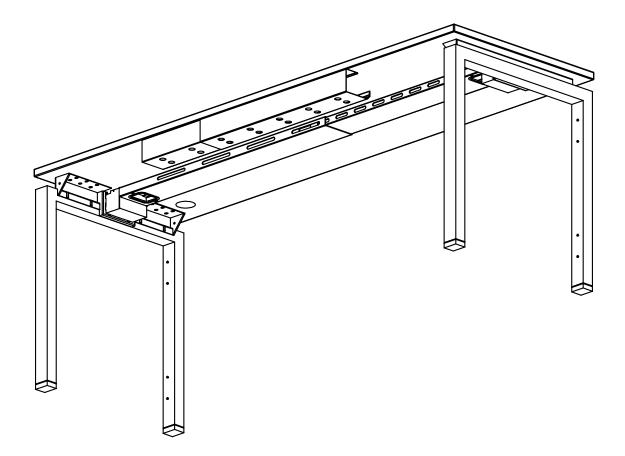

A1: SURFACE-MOUNT CABLE MANAGEMENT TRAY

OVERVIEW


BLADE Stand-Alone

A If workstations have power, refer to BL-8 BLADE power guide.

CODE	QTY	DESCRIPTION	
внст	1	Surface-Mount Cable Management Tray	
	10	Wood Screws	(K) MM


1 | EXTEND CABLE TRAY TO DESIRED LENGTH


Extension range: 25"-45".

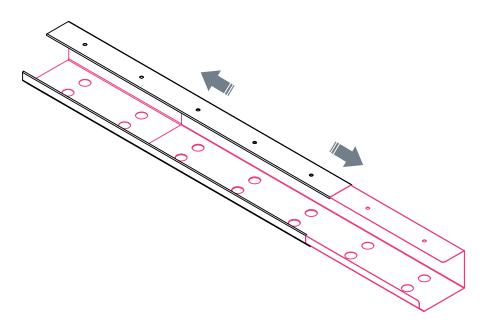

2 | ATTACH CABLE TRAY TO SURFACE

Attach cable tray using wood screws.

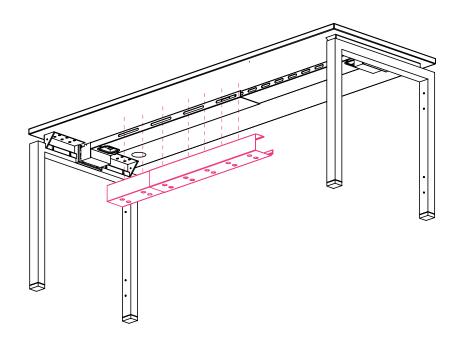

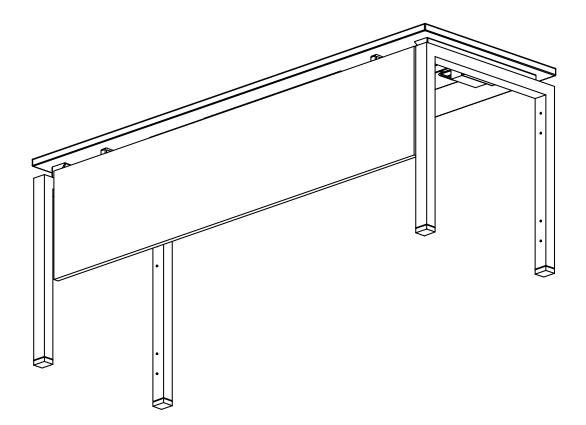

A2: MODESTY PANEL

OVERVIEW

BLADE Stand-Alone


All parts listed are for a single modesty panel; additional parts will be needed for additional modesty panels.

CODE	QTY	DESCRIPTION	
GLMP##	1	Laminate Modesty Panel*	
	4	Machine Screws	I
BMPBFB	2	L-Brackets	
	4	Wood Screws	AM

*For Steel Modesty Panel: components may vary, but process is similar.


1 | SECURE BRACKETS TO MODESTY PANEL


Connect the BMPBFB bracket to the modesty panel using screws. Secure tightly.

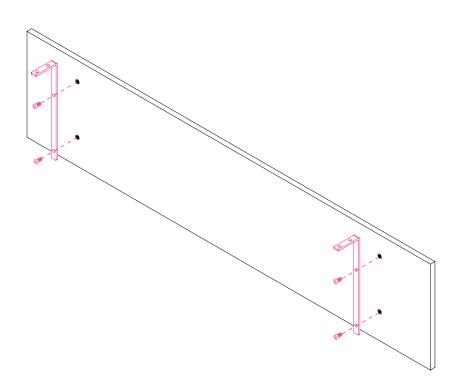

2 | ATTACH MODESTY PANEL TO SURFACE

Attach modesty panel to surface using wood screws provided with brackets. Panel will be center aligned and flushed with back of surface.

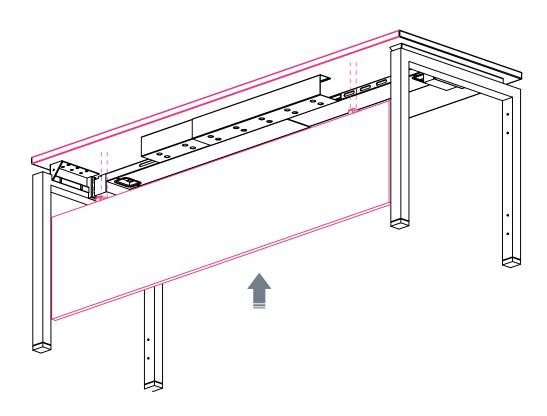

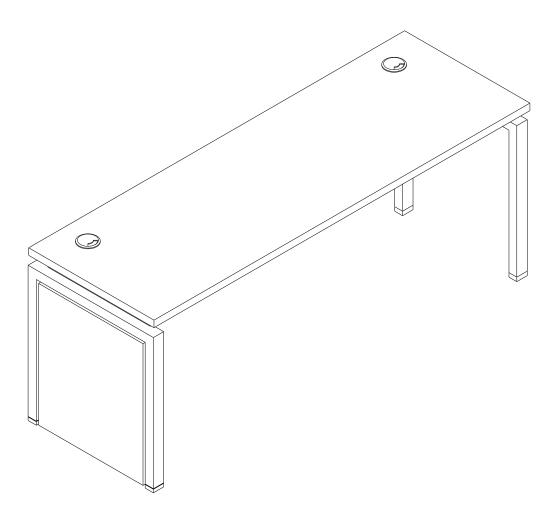

A3: LAMINATE INSET END PANELS

OVERVIEW


BLADE Stand-Alone

All parts listed are for a single panel; additional parts will be needed for additional panels.

CODE	QTY	DESCRIPTION	
GBEP##	1	Laminate Inset End Panel	
	4	End Panel T-Bracket	<u>}</u>
LEPBL1	8	Self-Tapping Screws	()
	8	Wood Screws	A) MM


1 | SECURE BRACKET TO END LEGS


Attach 4 brackets to each BLADE end leg using the self-tapping screws.1. Inset-The back of the bracket will align flush with edge of leg.2. Flush-Back of bracket will be 9/16" from edge back edge of leg.

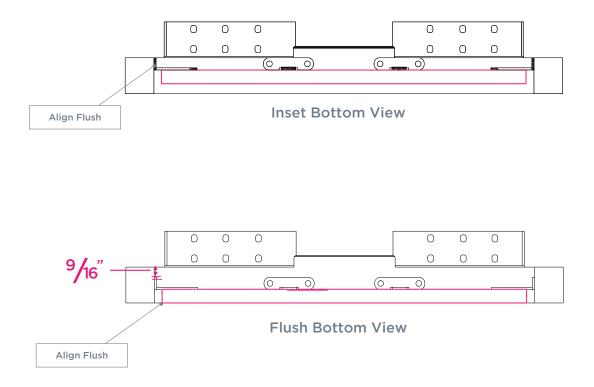

2 | ATTACH END PANEL

Slide end panels into place and adjust until flush with bracket. Use 2 wood screws to secure panel to each bracket.

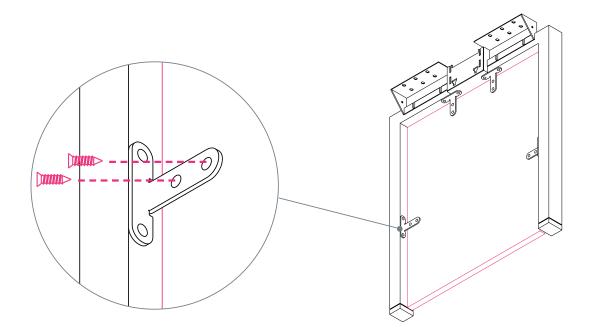

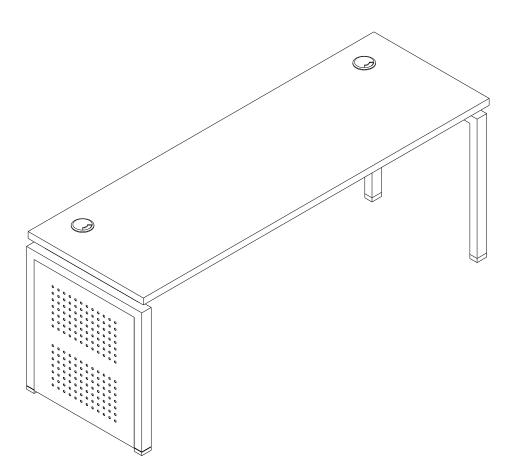

A4: STEEL INSET END PANELS OVERVIEW


BLADE Stand-Alone

All parts listed are for a steel inset end panel; additional parts will be needed for additional steel inset end panels.

CODE	QTY	DESCRIPTION	
BEP##	1	Steel Inset End Panel	
BEP##	6	Self-Tapping Screws	(]

1 | SECURE PANELS TO END LEGS

Slide the end panel into place and adjust until either flush with outside of leg or slightly recessed.

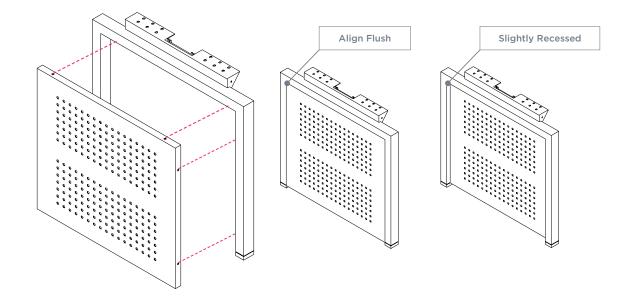

2 | ATTACH END PANEL

Use 4-6 self-tapping screws to secure panel to each leg.

