




LISTED

E209344

# SAFE-T-SWITCH® MODEL SS1

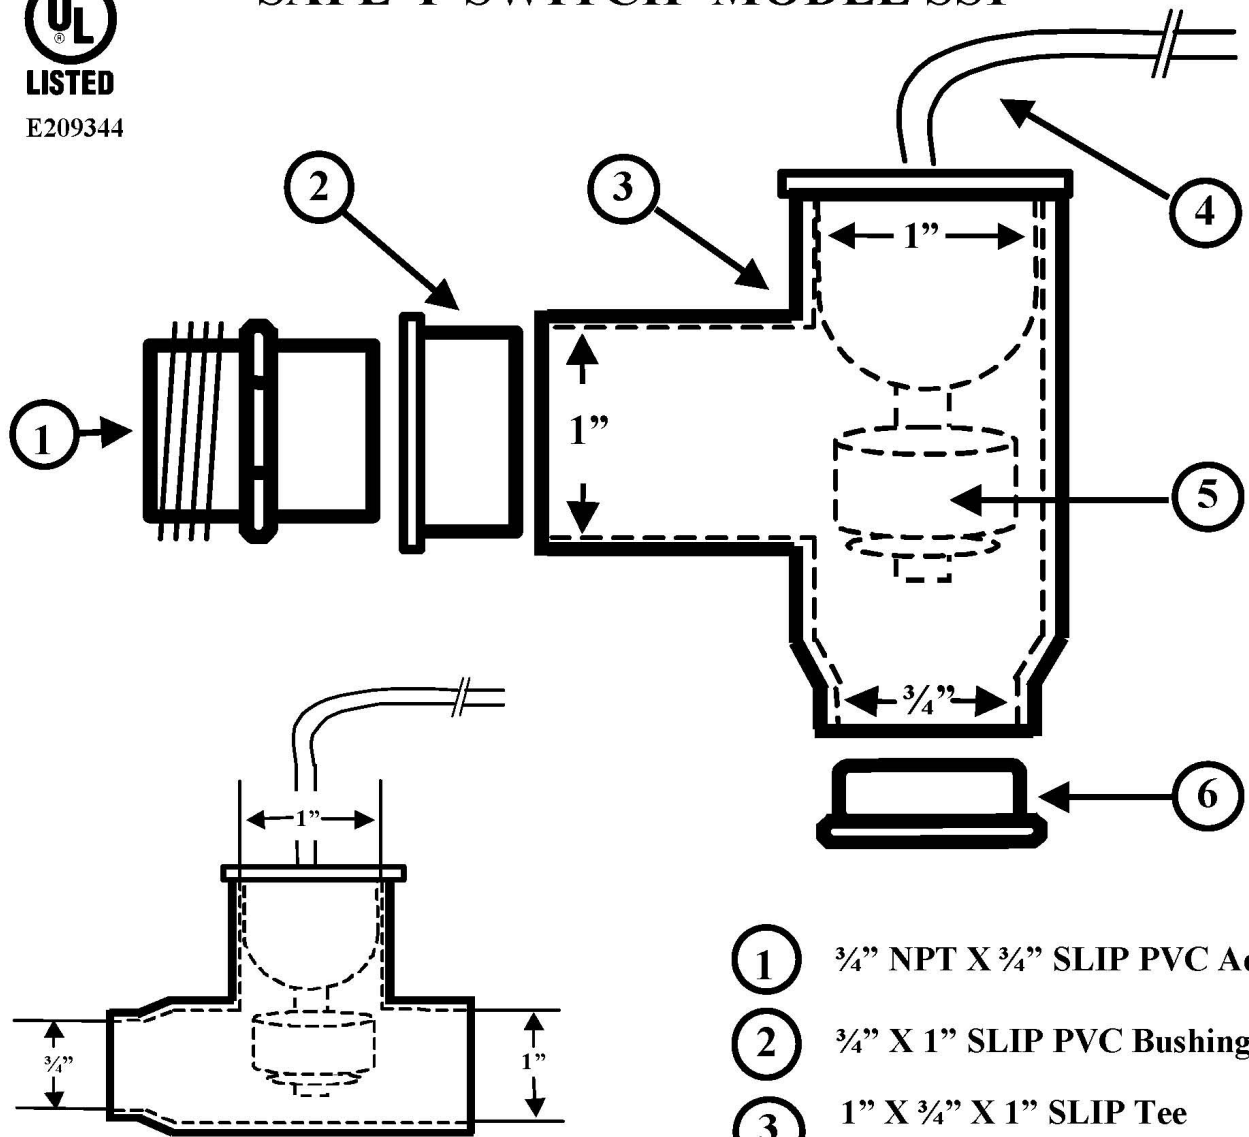

**HORIZONTAL APPLICATION**

- ① 3/4" NPT X 3/4" SLIP PVC Adaptor
- ② 3/4" X 1" SLIP PVC Bushing
- ③ 1" X 3/4" X 1" SLIP Tee (Schedule 40 / PVC 1)
- ④ 72"-Inch, 18AWG Cables (Prewired/Potted)
- ⑤ Electrically Potted Switch/Cap Assembly
- ⑥ 3/4" SLIP Plug for Close Coupled Applications

RECTORSEAL  
 2601 Spenwick Dr  
 Houston, TX 77055  
 800-231-3345 www.rectorseal.com

PART NAME:  
**MODEL SS1 3/4" INLINE A/C CONDENSATE  
 DRAIN OVERFLOW KIT**

TOLERANCES: (EXCEPT WHERE NOTED)  .XX ± .020 .XXX ± .005 .XXXX ± .0005 ANG. ± 1/2 °	SCALE: NONE	DRAWN BY: MTB	DATE: 3/27/06
	DRAWING #: SS1	APPROVED BY: SPO	REVISION: A

### REQUIREMENTS:

- Potted, water sealed reed/magnet switch design.
- UL 508 compliant.
- Schedule 40 PVC1 plastic components
- 2.5 Amp Carry capacity
- 1.25 Amp switching capacity