

FLIP RECESSED



Extended Family
Magnetic 24V Flip_P.91
Flip Surface_P.123
Flip 48V_P.206



MORE INFO >>

		P	CCT	Beam	I	Flux	LOR
FLIP Recessed	A491-0- Ⓞ -10- NT WT NTMG	6W	2700K	18°	500mA	640 lm	89%
	A491-0- Ⓞ -11- NT WT NTMG	6W	3000K	18°	500mA	670 lm	89%
	A491-0- Ⓞ -12- NT WT NTMG	6W	4000K	18°	500mA	720 lm	89%
	A491-0- Ⓞ -20- NT WT NTMG WTW	6W	2700K	40°	500mA	640 lm	84%
	A491-0- Ⓞ -21- NT WT NTMG WTW	6W	3000K	40°	500mA	670 lm	84%
	A491-0- Ⓞ -22- NT WT NTMG WTW	6W	4000K	40°	500mA	720 lm	84%

220 V~ | IP20 | CRI>90 | L80B10 >60.000h




*OPTIONS

1	No DIM
2	DIM DALI
3	DIM Push

DIM PHASE CUT & OTHER DIM OPTIONS
PLEASE CONSULT

FINISHING**	Body	Lampshade
NT	NT ■	N ■
WT	WT □	N ■
NTMG	NT ■	MG ■
WTW	WT □	W □



COLOUR | NT ■ | WT □ | NTMG ■ | WTW □ | MATERIAL | AL | ABS+PC | RAL ⓘ » 312

**OTHER FINISHING COMBINATIONS PLEASE CONSULT
"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR WT, NT & NTMG COLOURS

Ⓞ & ⓘ » 288

SIX RECESSED



Extended Family
Magnetic 24V Six XS_P.95
Six XS 24V_P.182
Six 48V_P.194
Six_P.226
Black Foster Six S_P.246



MORE INFO >>

		P	CCT	Beam	I	Flux	LOR	
SIX L Recessed 1	A287-11-10- WT NT	11,5W	2700K	17°	350mA	1600 lm	93%	
	A287-11-11- WT NT	11,5W	3000K	17°	350mA	1650 lm	93%	
	A287-11-12- WT NT	11,5W	4000K	17°	350mA	1700 lm	93%	
	A287-11-30- WT NT	11,5W	2700K	26°	350mA	1600 lm	93%	
	A287-11-31- WT NT	11,5W	3000K	26°	350mA	1650 lm	93%	
	A287-11-32- WT NT	11,5W	4000K	26°	350mA	1700 lm	93%	
	A287-11-20- WT NT	11,5W	2700K	34°	350mA	1600 lm	90%	
	A287-11-21- WT NT	11,5W	3000K	34°	350mA	1650 lm	90%	
	A287-11-22- WT NT	11,5W	4000K	34°	350mA	1700 lm	90%	
	SIX L Recessed 2	A287-2- Ⓞ -10- WT NT	24,5W	2700K	17°	700mA	2850 lm	93%
		A287-2- Ⓞ -11- WT NT	24,5W	3000K	17°	700mA	2950 lm	93%
A287-2- Ⓞ -12- WT NT		24,5W	4000K	17°	700mA	3000 lm	93%	
A287-2- Ⓞ -30- WT NT		24,5W	2700K	26°	700mA	2850 lm	93%	
A287-2- Ⓞ -31- WT NT		24,5W	3000K	26°	700mA	2950 lm	93%	
A287-2- Ⓞ -32- WT NT		24,5W	4000K	26°	700mA	3000 lm	93%	
A287-2- Ⓞ -20- WT NT		24,5W	2700K	34°	700mA	2850 lm	90%	
A287-2- Ⓞ -21- WT NT		24,5W	3000K	34°	700mA	2950 lm	90%	
A287-2- Ⓞ -22- WT NT		24,5W	4000K	34°	700mA	3000 lm	90%	

220 V~ | IP20 | CRI>90 | L90B10 >55.000h




*OPTIONS

1	No DIM
2	DIM Push
4	DIM DALI

DIM PHASE CUT & OTHER DIM OPTIONS
PLEASE CONSULT

OPTIONAL

SIX L High Chromatic LED ⓘ » 281
NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

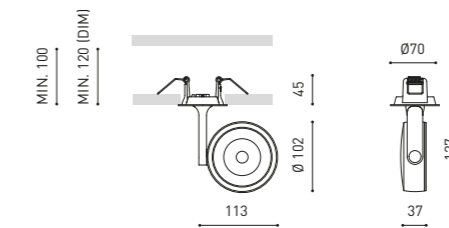

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC | RAL ⓘ » 312

Ⓞ & ⓘ » 288