




MORE INFO >>

Ø	CORD LENGTH - L
0	2 m
1	3 m
2	5 m

OPTIONAL ACCESSORIES


CORD Accessory

0223-00-00- | N |




TRIMLESS TOOL D20 X D52mm

A478-00-01

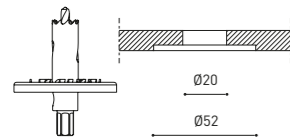

DUNE 35 + CORD ACCESSORY



		P	CCT	I	Flux	LOR	
DUNE 35	PHASE CUT	A482-0- -50- WT NT PG OG BE	4W	2700K	120mA	570 lm	83%
		A482-0- -51- WT NT PG OG BE	4W	3000K	120mA	600 lm	83%
	DALI	A482-0- -20- WT NT PG OG BE	4W	2700K	120mA	570 lm	83%
		A482-0- -21- WT NT PG OG BE	4W	3000K	120mA	600 lm	83%

220 V~ | IP20 | CRI>90 | L90B10 >55.000h



		P	CCT	I	Flux	LOR	
DUNE 35 Wire Trimless	PHASE CUT	A482-2- -50- WT NT PG OG BE	4W	2700K	120mA	570 lm	83%
		A482-2- -51- WT NT PG OG BE	4W	3000K	120mA	600 lm	83%
	DALI	A482-2- -20- WT NT PG OG BE	4W	2700K	120mA	570 lm	83%
		A482-2- -21- WT NT PG OG BE	4W	3000K	120mA	600 lm	83%

220 V~ | IP20 | CRI>90 | L90B10 >55.000h




		P	CCT	I	Flux	LOR	
DUNE 35 Base	NO DIM	A482-1- -10- WT NT PG OG BE	4W	2700K	120mA	570 lm	83%
		A482-1- -11- WT NT PG OG BE	4W	3000K	120mA	600 lm	83%
	DALI	A482-1- -20- WT NT PG OG BE	4W	2700K	120mA	570 lm	83%
		A482-1- -21- WT NT PG OG BE	4W	3000K	120mA	600 lm	83%

220 V~ | IP20 | CRI>90 | L90B10 >55.000h



FINISHING	Lamp	Cable	Base
WT	WT □	N ■	NT ■
NT	NT ■	N ■	NT ■
PG	PG ■	N ■	NT ■
OG	OG ■	N ■	NT ■
BE	BE ■	N ■	NT ■

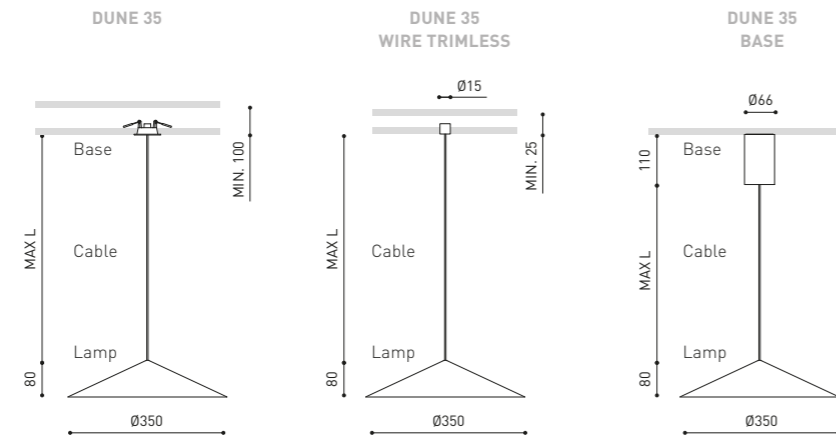

COLOUR | WT □ | NT ■ | PG ■ | OG ■ | BE ■ | N ■ | MATERIAL | AL | PC | RAL ⓘ » 312

COLOURS MAY AFFECT THE LIGHTING PARAMETERS | OTHER CCT & DIM OPTIONS PLEASE CONSULT




MORE INFO >>

Ø	CORD LENGTH - L
0	2 m
1	3 m
2	5 m

OPTIONAL ACCESSORIES


CORD Accessory

0223-00-00- | N |




TRIMLESS TOOL D20 X D52mm

A478-00-01



DUNE 55 + CORD ACCESSORY



		P	CCT	I	Flux	LOR	
DUNE 55	PHASE CUT	A483-0- -50- WT NT PG OG BE	5W	2700K	150mA	710 lm	84%
		A483-0- -51- WT NT PG OG BE	5W	3000K	150mA	735 lm	84%
	DALI	A483-0- -20- WT NT PG OG BE	5W	2700K	150mA	710 lm	84%
		A483-0- -21- WT NT PG OG BE	5W	3000K	150mA	735 lm	84%

220 V~ | IP20 | CRI>90 | L90B10 >55.000h



		P	CCT	I	Flux	LOR	
DUNE 55 Wire Trimless	PHASE CUT	A483-2- -50- WT NT PG OG BE	5W	2700K	150mA	710 lm	84%
		A483-2- -51- WT NT PG OG BE	5W	3000K	150mA	735 lm	84%
	DALI	A483-2- -20- WT NT PG OG BE	5W	2700K	150mA	710 lm	84%
		A483-2- -21- WT NT PG OG BE	5W	3000K	150mA	735 lm	84%

220 V~ | IP20 | CRI>90 | L90B10 >55.000h




		P	CCT	I	Flux	LOR	
DUNE 55 Base	NO DIM	A483-1- -10- WT NT PG OG BE	5W	2700K	150mA	710 lm	84%
		A483-1- -11- WT NT PG OG BE	5W	3000K	150mA	735 lm	84%
	DALI	A483-1- -20- WT NT PG OG BE	5W	2700K	150mA	710 lm	84%
		A483-1- -21- WT NT PG OG BE	5W	3000K	150mA	735 lm	84%

220 V~ | IP20 | CRI>90 | L90B10 >55.000h



FINISHING	Lamp	Cable	Base
WT	WT □	N ■	NT ■
NT	NT ■	N ■	NT ■
PG	PG ■	N ■	NT ■
OG	OG ■	N ■	NT ■
BE	BE ■	N ■	NT ■

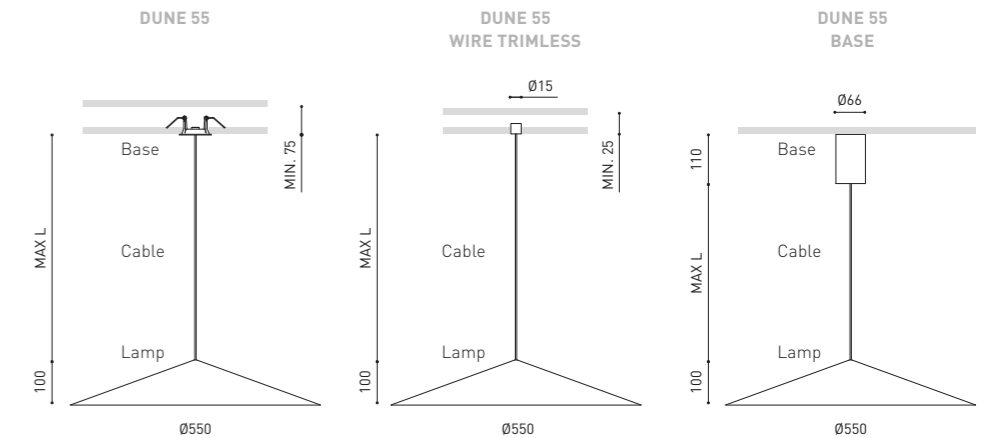

COLOUR | WT □ | NT ■ | PG ■ | OG ■ | BE ■ | N ■ | MATERIAL | AL | PC | RAL ⓘ » 312

COLOURS MAY AFFECT THE LIGHTING PARAMETERS | OTHER CCT & DIM OPTIONS PLEASE CONSULT