

COMMERCIAL

738234 (KCNF170WH)

#### Chest Freezer Novelty Freezer, 18 cu.ft , 1 Basket

Kelvinator Commercial 18 ft.3

Glass Lid Freezer, 1 Basket

ITEM #	MM
MODEL #	ш
NAME #	RC
SIS #	AL
AIA #	

# **Main Features**

- Temperature range of -10 to +10 F°
- Fan cooled condenser to cope with heavy duty conditions
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Included as standard 1 NSF® certified temperature gauge and 1 basket (including one vertical divider) durable and reliable for safety in food storage
- Removable rubber bumper guards
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Mechanical control panel with adjustable temperature
- Low energy consumption

#### Construction

- Tempered glass sliding lids
- Exterior and Interior finish in white painted Steel
- · Locking lids and key protect the contents of the unit
- Mounted on heavy-duty casters, two locking to keep unit in place but allows position adjusting.

# **Optional Accessories**

- - NOT TRANSLATED -
- PNC 882001 🗅

APPROVAL:



### Chest Freezer Novelty Freezer, 18 cu.ft , 1 Basket

### Electric


Eront

31 7/10" 804 mm

<u>1"</u> 24 mm

Electric	
Supply voltage: 738234 (KCNF170WH) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 0.3 kW USA NEMA 5-15P
Capacity:	
Capacity:	17.7 ft. <sup>3</sup>
<b>Key Information:</b>	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Condenser type: Automatic Defrost Cooling System: Compressor Horsepower: Freezer baskets (Number/Type): Control Warranty Net weight:	70 7/8" (1800.86 mm) 27 5/16" (693.42 mm) 34 13/16" (883.92 mm) Static No 1/5 1 / Wire Mechanical 1/5 Years 209 lbs (95 kg)
Shipping width: Shipping height: Shipping weight: Shipping volume:	30 3/16" (767 mm) 37 13/16" (960 mm) 209 lbs (95 kg) 48.67 ft <sup>3</sup> (1.38 m <sup>3</sup> )
<b>Refrigeration Data</b>	

Temperature display location: Temperature range: Refrigerant type: Internal -15 to 10 °F R290

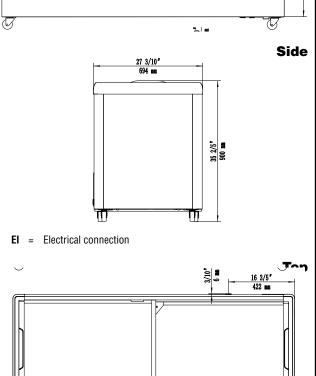

70 9/10" 1800 mm

