



COMMERCIAL

Refrigeration Equipment Mega Top Table, 48" with 4 drawers and 18GN1/6 containers - Stainless Steel (R290)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738287 (KCHMT48.18.2D)

4-drawer mega top preparation table, 48", R290 refrigerant gas, +33/+41°F, stainless steel

Short Form Specification

Item No. _____

4-drawer mega top refrigerated preparation table. Exterior back panel in aluminum, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board 71x9x0,5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- External temperature display.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

Optional Accessories

- shelf for 48" and 72" (left/right) mega top, PNC 880597
- salad and undercounter PNC 880611
- shelf clips

APPROVAL: _____

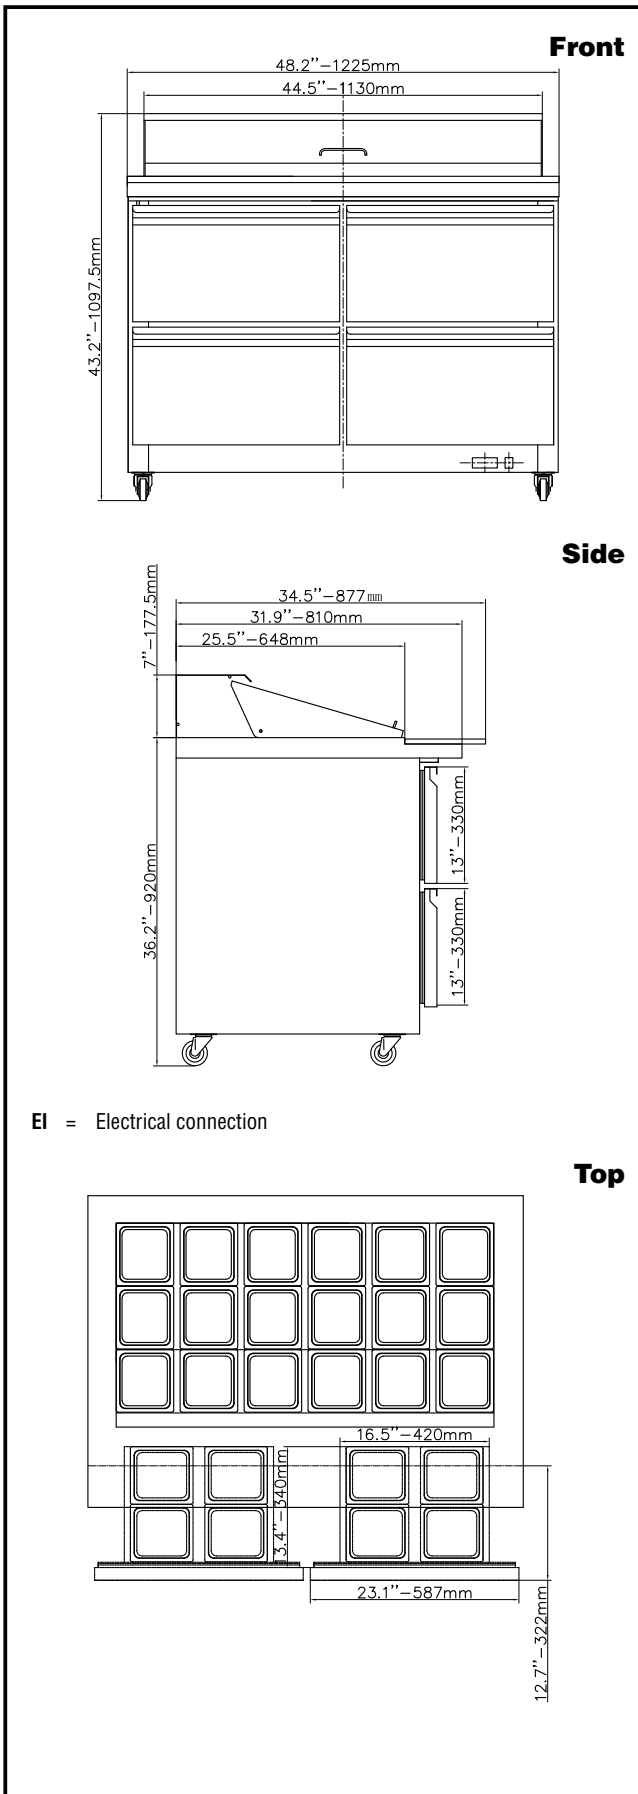

EI = Electrical connection

Electric

Supply voltage: 738287 (KCHMT48.18.2D) 115 V/1 ph/60 Hz
 Electrical power, max: 0.7 kW
 Current consumption: 7 Amps
 Plug type: USA NEMA 5-15P

Capacity:

Gross capacity: 12 cu. feet

Key Information:

External dimensions, Width: 48 1/4" (1225 mm)
 External dimensions, Depth: 34 1/2" (877 mm)
 External dimensions, Height: 43 3/16" (1097.5 mm)
 Number and type of doors:
 Internal Dimensions (depth): 23 13/16"
 Internal Dimensions (height): 23 1/2"
 Internal Dimensions (width): 42 13/16"
 Shipping height: 47 1/4" (1200 mm)
 Shipping weight: 320 lbs (145 kg)
 Number and type of grids (included): 1 - Vinyl-Coated Steel
 Type of external material: Stainless Steel
 Type of internal material: Polystyrene
 Warranty: 3 / 5 years

Refrigeration Data

Compressor power:
 Refrigerant type: R290
 Refrigerant weight: 90 g
 Operating temperature min.: 32 °F
 Operating temperature max.: 41 °F
 Condenser type: Fin & tube
 Defrost type: Auto Defrost