



COMMERCIAL

## Refrigeration Equipment Mega Top Table, 60" with 4 drawers and 24GN1/6 containers - Stainless Steel (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

Kelvinator  
COMMERCIAL



738288 (KCHMT60.24.2D)

4-drawer mega top preparation table, 60", R290 refrigerant gas, +33/+41°F, stainless steel

### Short Form Specification

**Item No.** \_\_\_\_\_

4-drawer mega top refrigerated preparation table. Exterior back panel in aluminum, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board 61x9x0,5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### Main Features

- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- External temperature display.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


### Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

### Optional Accessories

- shelf for 60" mega top, salad and undercounter  PNC 880596
- shelf clips  PNC 880611

APPROVAL: \_\_\_\_\_

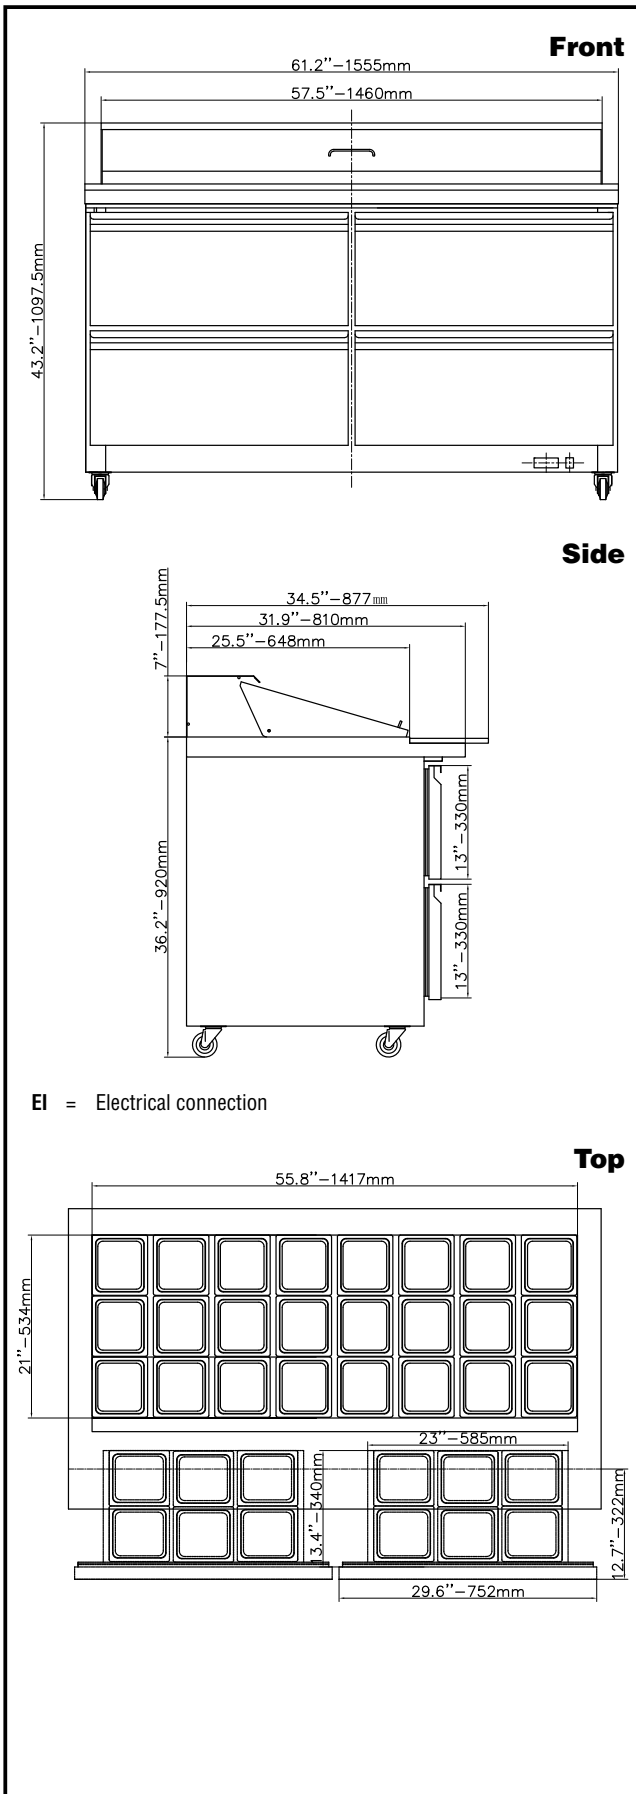

**Electric**

<b>Supply voltage:</b>	
738288 (KCHMT60.24.2D)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>	0.8 kW
<b>Current consumption:</b>	7.5 Amps
<b>Plug type:</b>	USA NEMA 5-15P

**Capacity:**

<b>Gross capacity:</b>	15.5 cu.feet
------------------------	--------------

**Key Information:**

<b>External dimensions, Width:</b>	61 1/4" (1555 mm)
<b>External dimensions, Depth:</b>	34 1/2" (877 mm)
<b>External dimensions, Height:</b>	43 3/16" (1097.5 mm)
<b>Number and type of doors:</b>	
<b>Internal Dimensions (depth):</b>	23 13/16"
<b>Internal Dimensions (height):</b>	23 1/2"
<b>Internal Dimensions (width):</b>	56 1/4"
<b>Shipping height:</b>	47 1/4" (1200 mm)
<b>Shipping weight:</b>	364 lbs (165 kg)
<b>Shipping volume:</b>	61.5 ft <sup>3</sup> (1.74 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	1 - Vinyl-Coated Steel
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	Polystyrene
<b>Warranty:</b>	3 / 5 years

**Refrigeration Data**

<b>Compressor power:</b>	
<b>Refrigerant type:</b>	R290
<b>Refrigerant weight:</b>	90 g
<b>Operating temperature min.:</b>	32 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost