

CR-H, CRN-H, CRE-H, CRNE-H

Horizontal end-suction multistage centrifugal pumps
North America, 60 Hz



1. Product introduction	4	11. Operating conditions	36
Features and benefits	4	Pumped liquids	36
Selecting a CRE-H, CRNE-H pump	5	List of pumped liquids	36
Pump	5	Operating range of the shaft seal	40
Motors	6	Maximum inlet pressure	41
Terminal box positions	9		
Viscosity	9		
Ambient temperature and altitude	9		
Installation altitude	10		
2. Applications	11	12. Selection and sizing	42
3. Application example for constant differential pressure in a circulation system	12	Selection of pumps	42
Constant differential pressure, pump	12	Minimum inlet pressure, NPSHA	45
Proportional differential pressure	12	How to read the curve charts	46
Proportional differential pressure, parabolic (proportional differential pressure available on CRE-DP only)	13	Guidelines to performance curves	47
Constant differential pressure	13		
Proportional differential pressure	13		
4. Performance range	14	13. Curve charts/technical data	48
CR-H, CRN-H	14	CR, CRN 1s H GA	48
CRE-H, CRNE-H	14	CR, CRE, CRN, CRNE 1 H GA	50
5. Product range	15	CR, CRE, CRN, CRNE 3 H GA	52
6. Identification	16	CR, CRE, CRN, CRNE 5 H GA	54
Type key	16	CR, CRE, CRN, CRNE 10 H G22	56
Codes	16	CR, CRE, CRN, CRNE 10 H GA/G05	58
7. MLE technical data	17	CR, CRE, CRN, CRNE 15 H G22	61
MLE permanent-magnet motors 1/2 - 2 HP	17	CR, CRE, CRN, CRNE 15 H GA/G05	63
MLE permanent-magnet motors 1-15 HP	18	CR, CRE, CRN, CRNE 15 H GB	66
MLE permanent-magnet motors 1 1/2 - 7 1/2 HP	19	CR, CRE, CRN, CRNE 20 H G22	68
MLE asynchronous motors 20-30 HP	20	CR, CRE, CRN, CRNE 20 H GA/G05	70
MLE motors for CRE-H and CRNE-H	21	CR, CRE, CRN, CRNE 20 H GB	73
8. Control of E-pumps	22	CR, CRE, CRN, CRNE 32 H G22	75
Examples of E-pump applications	22	CR, CRE, CRN, CRNE 32 H GA/G05	77
Control options	23	CR, CRE, CRN, CRNE 32 H GB/G50	80
Control modes for E-pumps	24	CR, CRE, CRN, CRNE 32 H GC/G10/G60	83
9. Advanced use of MLE motors	26	CR, CRE, CRN, CRNE 45 H G33	87
Introduction	26	CR, CRE, CRN, CRNE 45 H GB/G20/G50	89
Bearing monitoring	26	CR, CRE, CRN, CRNE 45 H GC/G10/G30/G60	93
Standstill heating	26	CR, CRE, CRN, CRNE 64 H G44	98
Outdoor installation	27	CR, CRE, CRN, CRNE 64 H GC/G10/G30/G60	100
Stop function	27	CR, CRE, CRN, CRNE 64 H G20/G50	105
Temperature sensors 1 and 2	28	CR, CRE, CRN, CRNE 64 H G40/G70	108
Signal relays	29	CR, CRN 90 H G44	111
Analog sensor inputs 1 and 2	30	CR, CRN 90 H G20	113
Limit exceeded 1 and 2	31	CR, CRN 90 H G30/G60	115
10. Construction	34	CR, CRN 90 H G40/G70	118
CR, CRE 1s, 1, 3, 5, 10, 15 and 20 H	34	14. Motor data	121
CRN, CRNE 1s, 1, 3, 5, 10, 15 and 20 H	34	Motors for CR(E)-H, CRN(E)-H	121
CR, CRE 32, 45, 64, and 90 H	35	15. Accessories	124
CRN, CRNE 32, 45, 64, and 90 H	35	Baseplate	124
		Pipe connection	128
		LiqTec	129
		Pressure sensor	132
		Pressure sensor	133
		Grundfos differential-pressure sensor, DPI	134
		Grundfos differential-pressure sensor, DPI g.2 version	136
		Flow transmitters	138
		Gauges for CRE, CRIE, CRNE	138
		Remote controls	139
		CIU communication interface units	140
		CIM communication interface modules	140
		MP 204 motor protector	141

16. Variants	142
Lists of variants on request	142
Motors	142
Connections and other variants	142
Shaft seals	142
Pumps	142
17. Grundfos Product Center	143
Grundfos GO	144
18. Submittal data	145
19. Quotation text	146

1. Product introduction

This product guide deals with CR-H and CRN-H horizontal end-suction pumps as well as CRE-H and CRNE-H pumps.

Features and benefits

CR-H, CRN-H



Fig. 1 CR-H pumps

CR-H, CRN-H pumps are horizontal end-suction pumps typically mounted on baseplates. The end-suction design enables the pump to be installed horizontally in traditional, end-suction design pipes where the pump has an axial inlet port and a radial center line outlet port. This design allows "back pull-out" capability so that most models can be serviced without removing the volute from the pipe system.

Grundfos CR-H, CRN-H pump range includes various pump sizes and various numbers of stages to provide the flow rate and the pressure required.

CR-H, CRN-H pumps are suitable for a variety of applications from pumping of potable water to pumping of chemicals. The pumps are therefore used in a wide variety of pumping systems where the performance and material of the pump meet specific demands.

The CR-H, CRN-H pumps consist of three main components: the motor, the pump unit, and the baseplate.

The pump unit consists of optimized hydraulics, various flange connections, a pump head, an end-suction volute, and various other parts.

CR-H, CRN-H pumps are available in various material versions according to the pumped liquid.

CR-H, CRN-H pumps can be selected that meet ASME B73.1 dimensional standards for inlet and outlet pipes as well as many of the baseplate dimensional standards. **CR-H, CRN-H pumps do not fully comply with the ASME B73.1 specification.**

There is also a full range of CR-H, CRN-H pumps with standard Grundfos connection sizes that are optimized to give greater performance and efficiency.

CRE-H, CRNE-H



TM04 3882 0710

Fig. 2 CRE-H pumps

CRE-H, CRNE-H pumps are built on the basis of CR-H, CRN-H pumps. CRE-H, CRNE-H pumps belong to the so-called E-pump family and are referred to as E-pumps. The difference between the CR-H, CRN-H and the CRE-H, CRNE-H pump range is the motor. CRE-H, CRNE-H pumps are fitted with an E-motor with built-in frequency control. The CRE-H, CRNE-H pump has a Grundfos MLE motor.

The built-in variable frequency drive enables continuously variable control of the motor speed.

This means that the pump can be set to operate at any duty point. The purpose of continuously variable speed control of the motor speed is to adjust the performance to a given requirement.

CRE-H, CRNE-H pumps are available with a pressure sensor enabling the control of the pressure on the outlet side of the pump.

The purpose of supplying the E-pumps with a pressure sensor is to make the installation and commissioning simple and quick. All other E-pumps are supplied without sensor.

E-pumps without sensor are used when uncontrolled operation (open loop) is required or when there is a wish to fit a sensor at a later stage in order to enable:

- Pressure control
- flow control
- level control of liquid in a tank
- temperature control
- differential pressure control
- differential temperature control.

CR-H, CRN-H, CRE-H, CRNE-H

E-pumps without sensor are also used when a remote analog signal is connected to the setpoint input terminal.

An E-pump is not just a pump, but a system which is able to solve application problems or save energy in a variety of pump installations. All that is required, is the power supply connection and the fitting of the E-pump in the pipe system, and the pump is ready for operation.

The pump has been tested and pre-configured from the factory. The operator only has to specify the desired setpoint (pressure) and the system is operational.

The pump materials are the same as those of the CR-H, CRN-H.

In new installations, the E-pumps provide a number of advantages. The integrated variable frequency drive has a built-in motor protection function which protects both motor and electronics against overload. This means that E-pump installations do not require a motor-protective circuit breaker, but only a normal short circuit protection for the cable.

Selecting a CRE-H, CRNE-H pump

Select a CRE-H, CRNE-H pump if:

- Controlled operation is required, i.e. consumption fluctuates.
- Constant pressure is required.
- Communication with the pump is required.

Adaptation of performance through frequency-controlled speed control offers obvious advantages:

- energy savings
- increased comfort
- control and monitoring of the pump performance.

See pages 17-33 for more information about E-pumps.

Pump

The CR-H, CRN-H pump is a non-self-priming, horizontal, end-suction, multistage centrifugal pump with enclosed impellers. The pumps are available with a Grundfos standard motor (CR-H, CRN-H pumps) or a frequency-controlled motor (CRE-H, CRNE-H pumps).

The pump consists of a volute and a pump head. The chamber stack and the outer sleeve are secured between the pump head and the volute by means of staybolts. The volute has an end-suction port and vertical centerline outline port.

All pumps are equipped with a maintenance-free mechanical shaft seal of the cartridge type.

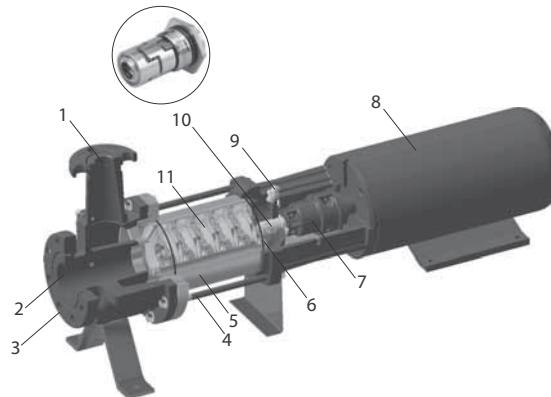


Fig. 3 CR-H pump

CR-H components

Pos.	Designation
1	Outlet
2	Inlet
3	Flange
4	Staybolts
5	Outer sleeve
6	O-ring
7	Coupling
8	Motor
9	Priming plug
10	Shaft seal
11	Impellers

TM04 4161 0510

Motors

Grundfos standard motors

ML (through 30 HP) and Baldor® (40 HP and larger) motors

CR-H, CRN-H pumps are fitted with a Grundfos specified motor. The motors are all heavy-duty 2-pole, NEMA C-face motors with feet. Three-phase motors greater than 3/4 HP are Premium efficient at minimum.

Frequency-controlled motors - MLE motors

MLE motors incorporate thermal protection against slow overload and blocking.

CRE-H, CRNE-H pumps require no external motor protection.

Frequency-controlled MLE motors

CRE-H, CRNE-H pumps are fitted with a totally enclosed, fan-cooled, frequency-controlled MLE motor.

Permanent-magnet motors

From 1/2 to 2 HP Grundfos offers CRE-H, CRNE-H pumps fitted with single-phase MLE motors (1 x 200-240 V).

From 1 to 15 HP Grundfos offers CRE-H, CRNE-H pumps fitted with three-phase MLE motors (3 x 440-480 V).

From 1 1/2 to 7 1/2 HP, Grundfos offers CRE-H, CRNE-H pumps fitted with three-phase MLE motors (3 x 200-240 V).

Asynchronous motors

From 20 to 30 HP Grundfos offers CRE-H, CRNE-H pumps fitted with three-phase MLE motors (3 x 460-480 V).

See Grundfos Product Center at www.grundfos.com.

Electrical data and approvals

CR-H, CRN-H

Mounting designation	NEMA
Insulation class	F & B
Efficiency class	<ul style="list-style-type: none"> • Standard efficiency - single-phase • Premium efficiency - three-phase Grundfos ML and Baldor motors
Enclosure class	TEFC - Totally Enclosed Fan Cooled (Grundfos standard) ODP - Open Drip Proof - on request
60 Hz standard voltages	1 x 115/208-230 V 3 x 208-230/460 V 3 x 575 V

Baldor



ML/MLE*

Approvals



MLE**



* Includes MLE motors 10 HP and smaller.

** Includes MLE motors 15 HP and larger.

Note: CR-H pump with ANSI/NSF 61 listing is available.

See UL file MH26400 or contact Grundfos.

CRE-H, CRNE-H

MLE motor CRE-H, CRNE-H	
Mounting designation	NEMA
Insulation class	F
Efficiency	See page 121, Motor Data.
Enclosure class	TEFC (Totally Enclosed Fan Cooled)
Supply voltage	1/2 to 2 HP: 1 x 200-240 V
Tolerance: - 10 %/+ 10 %	1 to 15 HP: 3 x 440-480 V
	20 to 30 HP: 3 x 460-480 V
	1 1/2 to 7 1/2 HP: 3 x 200-240 V

MLE 1/2 to 15 HP permanent-magnet motors

Supply voltage:

1/2 to 2 HP (1 x 200-240 V)

1 to 15 HP (3 x 440-480 V)

1 1/2 to 7 1/2 HP (3 x 200-240 V)

Advanced functional module (FM 300)

The FM 300 is the standard functional module in all MLE motors 1/2 to 15 HP.

The module has a number of inputs and outputs enabling the motor to be used in advanced applications where many inputs and outputs are required.

The FM 300 has these connections:

- three analog inputs
- one analog output
- two dedicated digital inputs
- two configurable digital inputs or open-collector outputs
- Grundfos Digital Sensor input and output
- two Pt100/1000 inputs
- two LiqTec sensor inputs
- two signal relay outputs
- GENIbus connection.

Connection terminals

CRE-H, CRNE-H pumps have a number of inputs and outputs enabling the pumps to be used in advanced applications where many inputs and outputs are required.

Functional module 300 has been selected as standard for CRE-H, CRNE-H pumps.

See fig. 4.

As a precaution, the wires to be connected to the following connection groups must be separated from each other by reinforced insulation in their entire lengths.

Inputs and outputs

- Start/stop (digital input 1) (terminals 2 and 6)
- pressure sensor (analog input 1) (terminals 4 and 8)
- pressure switch (digital input 3) (terminals 10 and 6)
- external analog signal input (analog input 2) (terminals 7 and 23)
- GENIbus (terminals A, Y and B).

All inputs and outputs are internally separated from the power-conducting parts by reinforced insulation and galvanically separated from other circuits.

All control terminals are supplied by protective extra-low voltage (PELV), thus ensuring protection against electric shock.

Signal relay outputs

– Signal relay 1:

LIVE:

Power supply voltages up to 250 VAC can be connected to this output.

PELV:



The output is galvanically separated from other circuits. Therefore, the supply voltage or proactive extra-low voltage can be connected to the output as desired.

– Signal relay 2:

PELV:

The output is galvanically separated from other circuits. Therefore, the supply voltage or proactive extra-low voltage can be connected to the output as desired.

– Power supply (terminals N, PE, L or L1, L2, L3, PE)

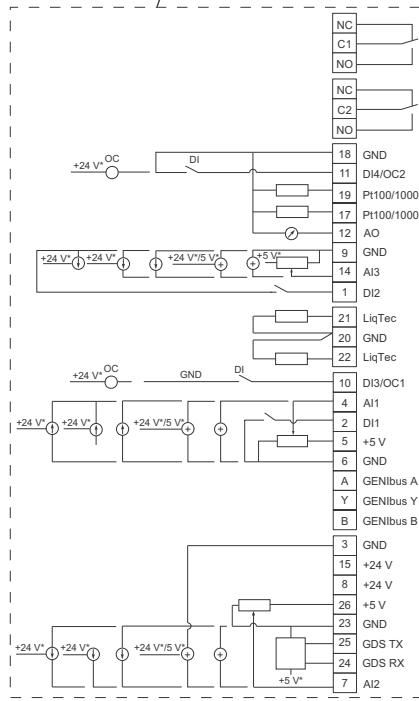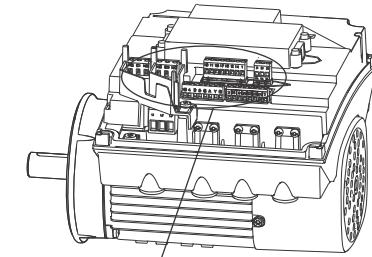

* If an external supply source is used, there must be a connection to GND.

Fig. 4 Connection terminals, FM 300 functional module

MLE 20 to 30 HP asynchronous motors

Supply voltage:

20 to 30 HP (3 x 460-480 V)

Advanced I/O module

The advanced I/O module is the standard functional module in these MLE motors.

The module has a number of inputs and outputs enabling the motor to be used in advanced applications where many inputs and outputs are required.

The Advanced I/O module has these connections:

- start/stop terminals
- three digital inputs
- one setpoint input
- one sensor input (feedback sensor)
- one sensor 2 input
- one analog output
- two Pt100 inputs
- two signal relay outputs
- GENibus connection.

Connection terminals

As a precaution, the wires to be connected to the following connection groups must be separated from each other by reinforced insulation in their entire lengths.

Inputs and outputs

- Start/stop (terminals 2 and 3)
- digital inputs (terminals 1 and 8. 10 and 8. 11 and 9)
- sensor input 2 (terminals 14 and 15)
- Pt100 sensor inputs (terminals 17, 18, 19 and 20)
- setpoint input (terminals 4, 5 and 6)
- sensor input (terminals 7 and 8)
- GENibus (terminals B, Y and A).

All inputs are internally separated from the power-conducting parts by reinforced insulation and galvanically separated from other circuits.

All control terminals are supplied with protective extra-low voltage (PELV), thus ensuring protection against electric shock.

Output (relay signal, terminals NC, C, NO)

The output is galvanically separated from other circuits.

Therefore, the supply voltage or protective extra-low voltage can be connected to the output as desired.

- Analog output (terminal 12 and 13).

Power supply (terminals L1, L2, L3)

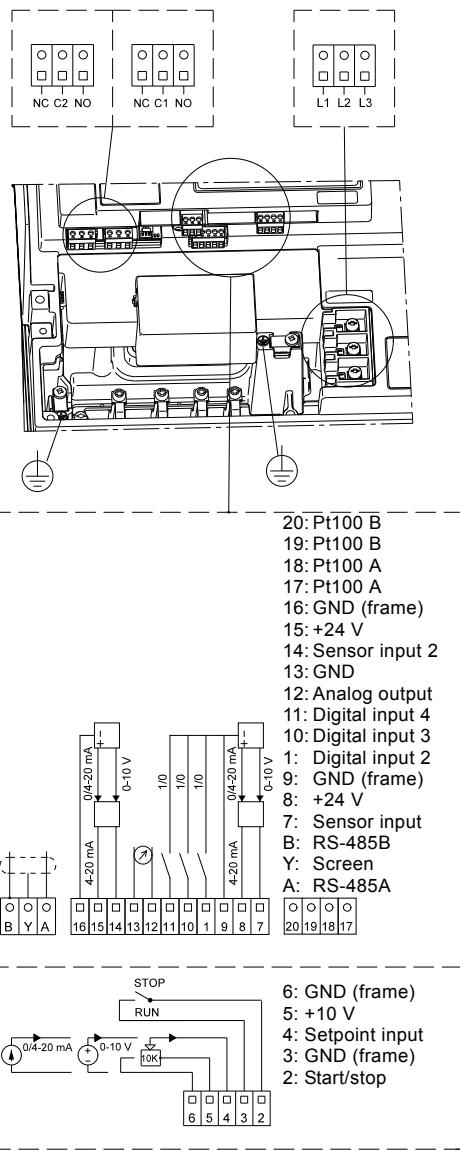


Fig. 5 Connection terminals, Advanced I/O module

Optional motors

The Grundfos standard range of motors covers a wide variety of application demands. However, for special applications or operating conditions, custom-built motor solutions can be provided.

For special applications or operating conditions, Grundfos offers custom-built motors such as:

- explosion-proof motors
- motors with anti-condensation heating unit
- low-noise motors
- energy efficient and premium efficiency motors
- motors with thermal protection.

Motor protection

Single-phase Grundfos specified motors up to 3/4 HP have a built-in thermal overload switch.

Three-phase motors **must** be connected to a motor-protective circuit breaker in accordance with local regulations.

MLE motors

CRE-H, CRNE-H pumps require no external motor protection. The MLE motor incorporates thermal protection against slow overloading and blocking.

Terminal box positions

As standard the terminal box is mounted as shown in fig. 6.

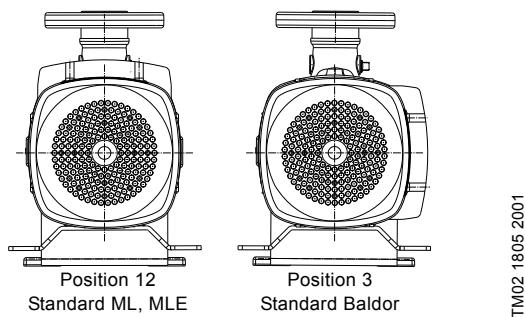


Fig. 6 Terminal box positions

Viscosity

The pumping of liquids with densities or kinematic viscosities higher than those of water will cause a considerable pressure drop, a drop in the hydraulic performance and a rise in the power consumption.


In such situations, the pump must be equipped with a larger motor. For selection you may utilize the Grundfos Product Center at www.grundfos.com. If in doubt, contact Grundfos.

Ambient temperature and altitude

If the ambient temperature exceeds the maximum temperature limits of the motor or the pump is installed at an altitude exceeding the altitude values in the chart below (3280 ft (1000 m)), the motor must not be fully loaded due to the risk of overheating.

Overheating may result from excessive ambient temperatures or the low density and consequently low cooling effect of the air at high altitudes. In such cases, it may be necessary to use a motor with a higher rated output (P_2).

See also [Installation altitude](#) on page 10.

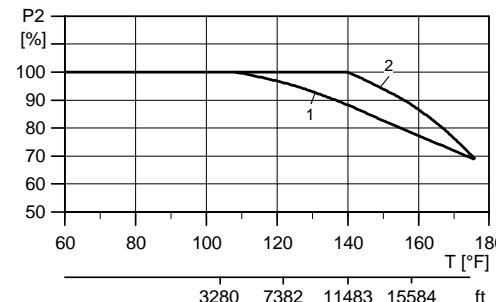

TM03 4272 2006

Fig. 7 Relationship between motor output (P_2) and ambient temperature/altitude

Legend

Pos.	Description
1	NEMA energy efficient motors (EPAct)
2	NEMA Premium efficiency motors

Example: From fig. 7 it appears that P_2 must be reduced to 88 % when a pump with a NEMA Premium efficiency, ML motor is installed 15,584 feet above sea level. At an ambient temperature of 167 °F, P_2 of an energy efficient motor must be reduced to 74 % of rated output.

MLE motor power [HP (kW)]	Motor make	Voltage [V]	Max. ambient temp. [°F (°C)]	Max. altitude above sea level [ft (m)]
1/2 to 2 (0.37 to 1.5)	MLE	1 x 200-240	122 (50)	
1 to 15 (0.74 to 11.18)	MLE	3 x 440-480	122 (50)	3280 (1000)
1 1/2 to 7 1/2 (1.1 to 5.5)	MLE	3 x 200-240	104 (40)	
20 to 30 (14.91 to 22)	MLE	3 x 460-480	104 (40)	

Installation altitude

Installation altitude is the height above sea level of the installation site. Motors installed up to 3280 ft (1000 m) above sea level can be loaded 100 %.

Motors installed more than 3280 ft (1000 m) above sea level must not be fully loaded due to the low density and consequently low cooling effect of the air.

MLE permanent-magnet motors

1/2 to 2 HP (1 x 200-240 V)

1 to 15 HP (3 x 440-480 V)

1 1/2 to 7 1/2 HP (3 x 200-240 V)

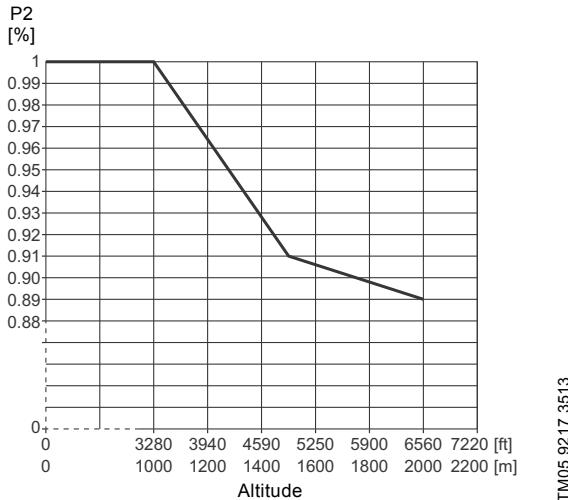


Fig. 8 Derating of motor output (P2) in relation to altitude above sea level

MLE asynchronous motors

20 to 30 HP (3 x 460-480 V)

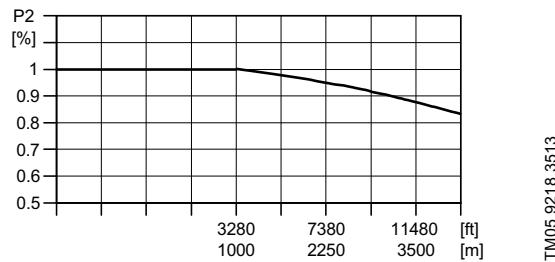


Fig. 9 Derating of motor output (P2) in relation to altitude above sea level

2. Applications

Application	CR-H	CRN-H	CRE-H, CRNE-H
Water supply			
Filtration and transfer at waterworks	•	○	•
Distribution from waterworks	•	○	•
Pressure boosting in mains	•	○	•
Pressure boosting in high-rise buildings, hotels, etc.	•	○	•
Pressure boosting for industrial water supply	•	○	•
Industry			
Pressure boosting...			
process water systems	•	•	•
washing and cleaning systems	•	•	•
vehicle washing tunnels	•	○	•
fire fighting systems	•		
Liquid transfer...			
cooling and air-conditioning systems (refrigerants)	•	○	•
boiler feed and condensate systems	•	○	•
machine tools (cooling lubricants)	•	•	•
aquafarming	•	○	
Special transfer duties...			
oils and alcohols	•	•	•
acids and alkalis		•	
glycol and coolants	•	•	•
Water treatment			
Ultrafiltration systems		•	•
Reverse osmosis systems		•	•
Softening, ionizing, demineralizing systems		•	•
Distillation systems		•	•
Separators	•	•	•
Swimming pools		•	•
Irrigation			
Field irrigation (flooding)	•	○	
Sprinkler irrigation	•	○	•
Drip-feed irrigation	•	○	

• Recommended version.

○ Alternative version.

3. Application example for constant differential pressure in a circulation system

Circulation systems (closed systems) are well-suited for speed-controlled pump solutions.

It is an advantage that circulation systems with variable system characteristic are fitted with a differential-pressure-controlled circulator pump. See fig. 10.

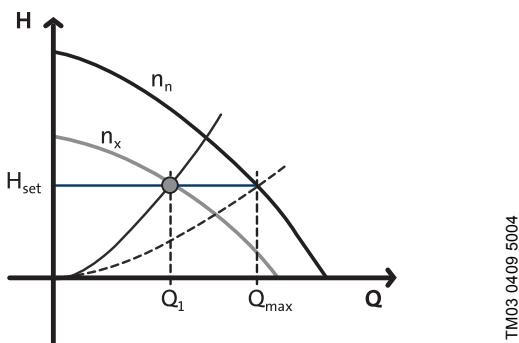
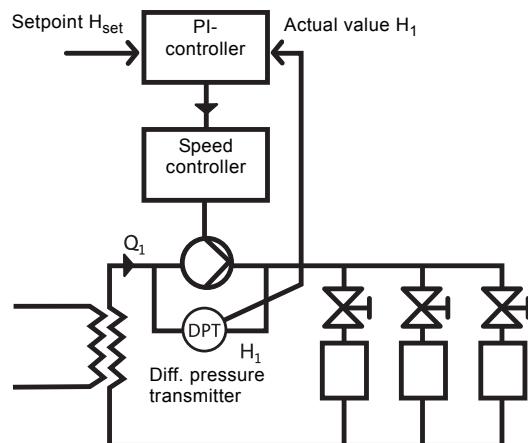



Fig. 10 Constant differential-pressure control

Figure 10 shows a heating system consisting of a heat exchanger where the circulated water is heated and delivered to three radiators by a speed-controlled pump. A control valve is connected in series at each radiator to control the flow according to the heat requirement.

The pump is controlled according to a constant differential pressure measured across the pump. This means that the pump system offers constant differential pressure in the Q range of 0 to $Q_{\max.}$, represented by the horizontal line in fig. 10.

Constant differential pressure, pump

The differential pressure of the pump is kept constant, independently of the flow rate. See fig. 11.




TM03 8476 1607

Fig. 11 Constant differential pressure, pump

The pump is controlled according to a constant differential pressure measured across the pump. This means that the pump system offers constant differential pressure in the Q-range of 0 to $Q_{\max.}$, represented by the horizontal line in the QH diagram.

Proportional differential pressure

The differential pressure of the pump is reduced at falling flow rate and increased at rising flow rate. See fig. 12.



TM03 8475 1607

Fig. 12 Proportional differential pressure

The pump is controlled according to a differential pressure measured across the pump. This means that the pump system offers a proportional differential pressure in the Q-range of 0 to $Q_{\max.}$, represented by the sloping line in the QH diagram.

Proportional differential pressure, parabolic (proportional differential pressure available on CRE-DP only)

Setting via PC Tool.

The proportional differential pressure can be selected with one of these flow dependencies:

- linear (setting via PC Tool).
- parabolic (setting via PC Tool).

When the flow dependency is selected as parabolic, the differential pressure of the pump will be reduced with a parabolic curve at falling flow rate and increased at rising flow rate. See fig. 13.




Fig. 13 Proportional differential pressure, parabolic curve

The pump is controlled according to a differential pressure measured across the pump. This means that the pump system offers a flow-compensated differential pressure in the Q-range of 0 to Q_{\max} , represented by the parabolic curve in the QH diagram.

Constant differential pressure

The setpoint range is between 12.5 % and 100 % of maximum head.

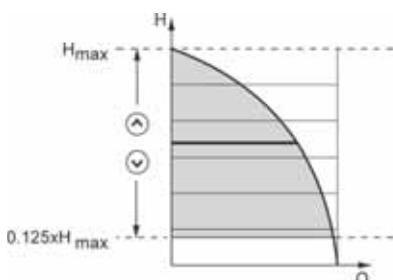


Fig. 14 Constant differential pressure

Proportional differential pressure

The setpoint range is between 25 % and 90 % of maximum head.

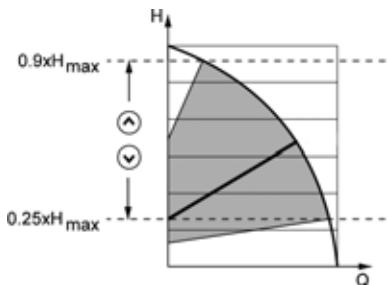


Fig. 15 Proportional differential pressure

To compensate for this excessive system pressure, the proportional-pressure function automatically adapts the setpoint to the actual flow rate.

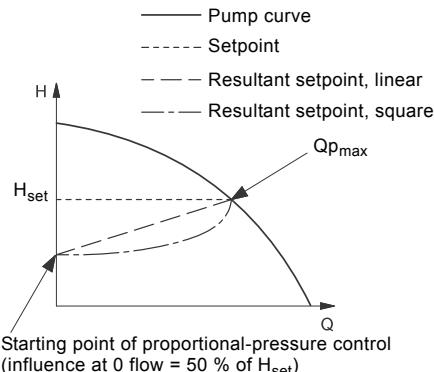


Fig. 16 Proportional-pressure control

The factory-fitted differential-pressure sensor is a variant. Contact Grundfos for additional details.




Fig. 17 Proportional pressure


TM06 2479 1014

TM03 8524 2212

TM06 2478 1014


4. Performance range

CR-H, CRN-H

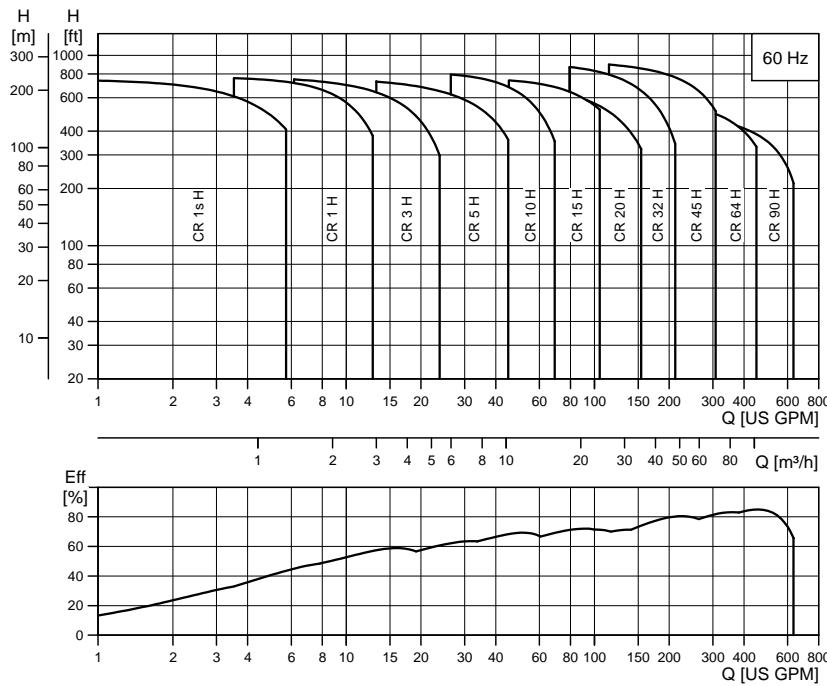

TM04 4552 1212

CRE-H, CRNE-H

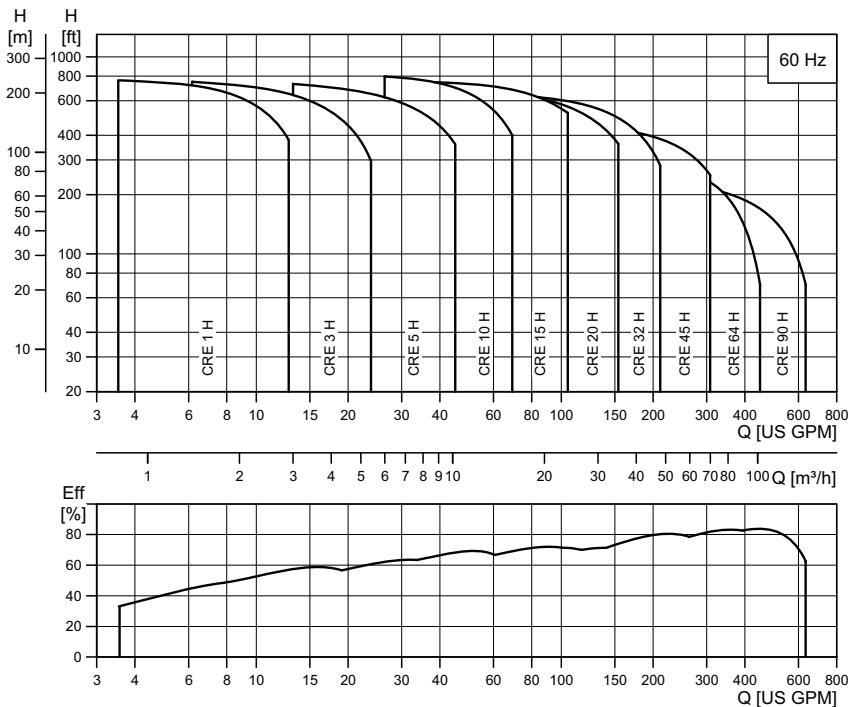

TM04 9018 1112

5. Product range

Range	CR, CRE 1s H	CR, CRE 1 H	CR, CRE 3 H	CR, CRE 5 H	CR, CRE 10 H	CR, CRE 15 H	CR, CRE 20 H	CR, CRE 32 H	CR, CRE 45 H	CR, CRE 64 H	CR 90 H
Nominal flow rate [US GPM]	4.5	8.5	15	30	55	95	110	140	220	340	440
Temperature range [°F]				-4 to +250					-22 to +250		
Temperature range [°F] - on request				-40 to +356					-40 to +356		
Maximum working pressure [psi]	360	360	360	360	360	360	360	435	435	435	435
Maximum pump efficiency [%]	35	49	59	64	70	72	72	73	80	82	85
CR-H pumps											
CR: Flow range [US GPM]	0.5 - 5.7	1 - 12.8	1.5 - 23.8	3-45	5.5 - 70	9.5 - 125	11-155	14-210	22-310	34-450	44-630
CR: Maximum shut-off pressure (H [ft])	745	785	785	780	810	760	675	935	930	590	570
CR: Motor power [HP]	1/3 - 2	1/2 - 3	1/2 - 5	3/4 - 7 1/2	3/4 - 15	2 - 25	3 - 25	3 - 50	7 1/2 - 60	7 1/2 - 60	15-60
CRE-H pumps											
CRE: Flow range [US GPM]	0 - 5.7	0 - 12.8	0 - 23.8	0-45	0-70	0-125	0-155	0-210	0-310	0-450	0-630
CRE: Maximum shut-off pressure (H [ft])	745	785	785	780	810	760	675	670	470	310	270
CRE: Motor power [HP]	1/3 - 2	1/3 - 3	1/3 - 5	3/4 - 7.5	3/4 - 15	2 - 25	3 - 25	3 - 30	7 1/2 - 30	7 1/2 - 30	15-30
Version											
CR-H, CRE-H versions: Cast iron and stainless steel AISI 304	•	•	•	•	•	•	•	•	•	•	•
CRN-H, CRNE-H versions: Stainless steel AISI 316	•	•	•	•	•	•	•	•	•	•	•
CR-H, CRE-H pipe connection											
ANSI connection type	GA	GA	GA	GA	G22*	G22*	G22*	G22*	G33*	G44*	G44*
ANSI flange class [lb]	125/250	125/250	125/250	125/250	125/250	125/250	125/250	125/250	125/250	125/250	125/250
CRN-H, CRNE-H pipe connection											
ANSI connection type	GA	GA	GA	GA	G22*	G22*	G22*	G22*	G33*	G44*	G44*
ANSI flange class [lb]	150/300	150/300	150/300	150/300	150/300	150/300	150/300	150/300	150/300	150/300	150/300
Pipe connection - inlet x outlet x impeller size reference											
GA ANSI 1.5" x 1" x 6", 1.5" x 1" x 8"	•	•	•	•	•	•	•	•			
G05 ANSI 2" x 1" x 10"					•	•	•	•			
GB ANSI 3" x 1.5" x 6", 3" x 1.5" x 8"						•	•	•	•		
GC ANSI 3" x 2" x 6"							•	•	•	•	
G10 ANSI 3" x 2" x 6"							•	•	•	•	
G50 ANSI 3" x 1.5" x 8", 3" x 1.5" x 10"							•	•	•	•	
G60 ANSI 3" x 2" x 8", 3" x 2" x 10"							•	•	•	•	
G20 ANSI 3" x 1.5" x 13"								•	•	•	
G30 ANSI 3" x 2" x 13"								•	•	•	
G70 ANSI 4" x 3" x 8", 4" x 3" x 10"									•	•	
G40 ANSI 4" x 3" x 10", 4" x 3" x 13"									•	•	
G22 ANSI 2" x 2"					•	•	•	•			
G33 ANSI 3" x 3"							•	•			
G44 ANSI 4" x 4"								•	•		

• Available

* There are a variety of flange size options available for this size CR-H (see list above). Selection should be based on replacement size or choose listed size for new installations.

6. Identification

Type key

CR-H, CRE-H

Example	CR E 5 s -4 -2 H -GA -G -E -HQQE
Type range	
Pump with integrated frequency control	
Rated flow rate [m ³ /h]	
All impellers with reduced diameter (applies only to CR, CRN 1s H)	
Number of impellers	
Number of reduced diameter impellers (applies only to CR, CR(E), CRN, CRN(E) 32, 45, 64, 90 H)	
Code for pump version	H
Code for pipe connection	GA
Code for materials	G
Code for rubber parts	E
Code for shaft seal	HQQE

Codes

Example	H -GA -A -E -H QQ E
Pump version	
HB Oversize motor	
HE Certificate/approval	
HF CR pump for high temperatures (air cooled top assembly)	
H Basic horizontal version	
HI Different pressure rating	
HJ Pump with different max speed	
HK Pump with low NPSH	
HM Magnetic drive	
HN Fitted with sensor	
HP Undersize motor	
HR Belt-driven pump	
HT Oversize motor (two flange sizes bigger) (two flange sizes bigger)	
X Special version ¹⁾	

Example	H -GA -A -E -H QQ E
Pipe connection (inlet x outlet x impeller size reference)²⁾	
GA ANSI 1.5" x 1" x 6", 1.5" x 1" x 8"	
G05 ANSI 2" x 1" x 10"	
GB ANSI 3" x 1.5" x 6", 3" x 1.5" x 8"	
GC ANSI 3" x 2" x 6"	
G10 ANSI 3" x 2" x 6"	
G50 ANSI 3" x 1.5" x 8", 3" x 1.5" x 10"	
G60 ANSI 3" x 2" x 8", 3" x 2" x 10"	
G20 ANSI 3" x 1.5" x 13"	
G30 ANSI 3" x 2" x 13"	
G70 ANSI 4" x 3" x 8", 4" x 3" x 10"	
G40 ANSI 4" x 3" x 10", 4" x 3" x 13"	
G22 ANSI 2" x 2"	
G33 ANSI 3" x 3"	
G44 ANSI 4" x 4"	
Materials	
A Basic version	
D Carbon-graphite filled PTFE (bearings)	
G Wetted parts AISI 316	
GI All parts stainless steel, wetted parts AISI 316	
K Bronze (bearings)	
S SIC bearings + PTFE neck rings	
X Special version	
Code for rubber parts	
E EPDM	
F FXM	
K FFKM	
V FKM	
Shaft seal	
H Balanced cartridge seal with O-ring	
K Metal bellows cartridge seal	
O Double seal, back-to-back	
P Double seal, tandem	
X Special version	
B Carbon, synthetic resin-impregnated	
H Cemented tungsten carbide, embedded (hybrid)	
Q Silicon carbide	
U Cemented tungsten carbide	
X Other ceramics	
E EPDM	
F FXM	
K FFKM	
V FKM	

¹⁾ If a pump incorporates more than two pump versions, the code for the pump version is X. X also indicates special pump versions not listed above.

²⁾ The pipe connection code designates the pump as a **CR horizontal end-suction** pump.

7. MLE technical data

Grundfos MLE motors are equipped with NEMA standard C-face flanges.


Grundfos MLE motors are recognized under the Component Recognition Program of Underwriters Laboratories Inc. for the United States and Canada.

MLE motors are equipped with a reinforced bearing system with locked bearings at the drive end, either a deep-groove ball bearing or an angular-contact bearing depending on the motor model.

This ensures an even uptake of the load in order to maximize the lifetime of the bearings, which are guaranteed for a minimum of 18,000 hours service life. At the non-drive end, the motors are fitted with bearings with axial clearance in order to meet production tolerances while allowing for thermal expansion during motor operation. This ensures trouble-free operation and long life.

MLE permanent-magnet motors 1/2 - 2 HP

(2-pole) 1/60/200-240

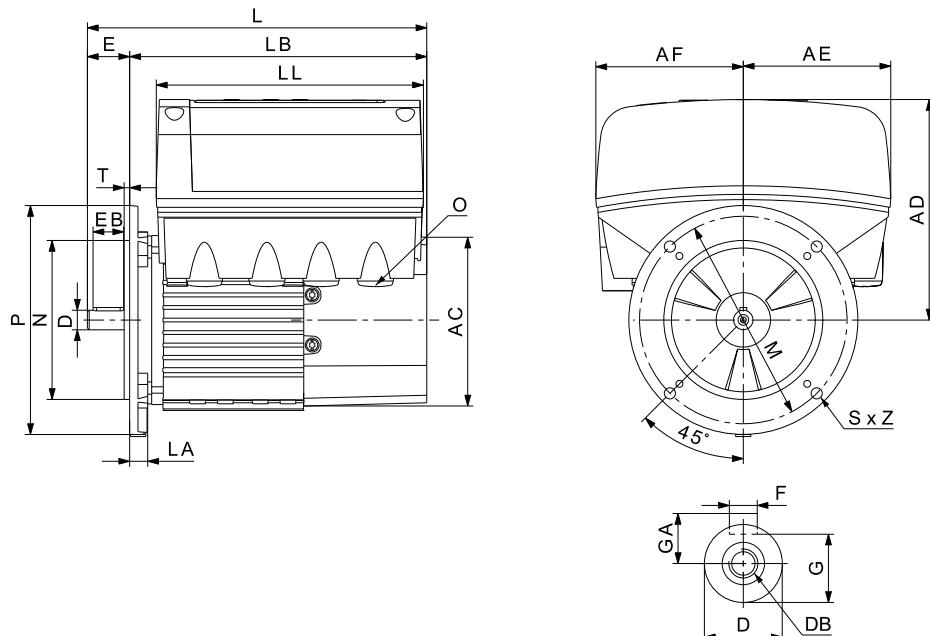

TM05 6786 5012


2-pole dimensional data

Power [HP]	NEMA frame	Stator housing [inches (mm)]						Shaft end [inches (mm)]	
		AC	AD	AF	L	LB	LL	D	E
1/2									
3/4									
1									
1 1/2									
2									
	56C	4.80 (122)	6.22 (158)	4.17 (106)	10.55 (268)	8.46 (215)	7.56 (192)	0.63 (15.9)	2.06 (52.3)
		4.80 (122)	6.22 (158)	4.17 (106)	11.34 (288)	9.25 (235)	7.56 (192)	0.63 (15.9)	2.06 (52.3)

Power [HP]	NEMA Frame	Flange [inches (mm)]						Cable entries [mm]	
		LA	M	N	P	S	T	O	
1/2									
3/4									
1									
1 1/2									
2									
	56C	0.63 (16)	5.87 (149.2)	4.50 (114.3)	6.50 (165)	3/8"	0.16 (4)	1/2" NPT (4)	
		1.42 (36)	5.87 (149.2)	4.50 (114.3)	6.50 (165)	3/8"	0.16 (4)	1/2" NPT (4)	

MLE permanent-magnet motors 1-15 HP

(2-pole) 3/60/440-480

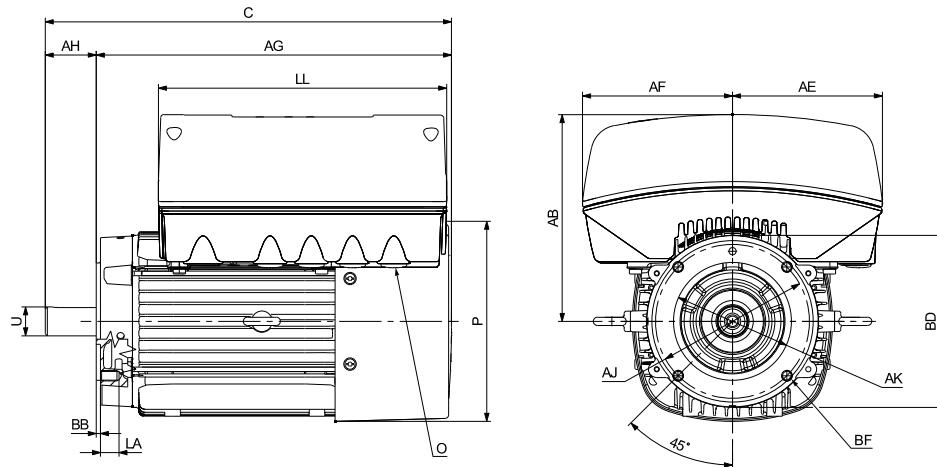


TM06 65183316

Dimensional data

Power [HP]	NEMA frame	Stator housing [inches (mm)]							Shaft end [inches (mm)]	
		P	AB	AE	AF	C	AG	LL	U	AH
1	56C	4.80 (122)	6.22 (158)	5.28 (134)	5.28 (134)	12.13 (308)	10.04 (255)	9.13 (232)	0.63 (15.9)	2.06 (52.3)
1 1/2		4.80 (122)	6.22 (158)	5.28 (134)	5.28 (134)	12.91 (328)	10.83 (275)	9.13 (232)	0.63 (15.9)	2.06 (52.3)
20		4.80 (122)	6.22 (158)	5.28 (134)	5.28 (134)	12.39 (314.75)	10.51 (267)	9.13 (232)	0.63 (16.075)	1.88 (47.75)
30	182TC	4.80 (122)	6.22 (158)	5.28 (134)	5.28 (134)	13.46 (342)	10.83 (275)	9.13 (232)	1.13 (28.6)	2.62 (66.6)
5		7.53 (191.3)	7.91 (201)	5.73 (145.5)	5.73 (145.5)	15.89 (403.6)	13.15 (334)	11.02 (280)	1.13 (28.6)	2.74 (69.6)
7 1/2	213TC	7.53 (191.3)	7.91 (201)	5.73 (145.5)	5.73 (145.5)	17.75 (450.9)	14.37 (365)	11.02 (280)	1.37 (34.9)	3.38 (85.9)
10		10.04 (254.9)	9.33 (237)	6.81 (173)	6.81 (173)	18.70 (474.9)	15.31 (389)	12.48 (317)	1.37 (34.9)	3.38 (85.9)
15	254TC	10.04 (254.9)	9.33 (237)	6.81 (173)	6.81 (173)	19.74 (501.3)	15.98 (406)	12.48 (317)	1.63 (41.3)	3.75 (95.3)

Power [HP]	NEMA frame	Flange [inches (mm)]						Cable entries [mm]	
		LA	AJ	AK	BD	BF	BB	O	
10	56C	0.63 (16)	5.87 (149.2)	4.50 (114.3)	6.50 (165)	3/8" (4)	0.16 (4)	1/2" NPT (4)	
1 1/2		1.42 (36)	5.87 (149.2)	4.50 (114.3)	6.50 (165)	3/8" (4)	0.16 (4)	1/2" NPT (4)	
20		0.51 (12.9)	5.87 (149.2)	4.50 (114.3)	6.53 (165.8)	3/8" (4)	0.16 (4)	1/2" NPT (5)	
30	182TC	0.75 (19)	7.25 (184.15)	8.50 (215.9)	8.50 (215.9)	1/2" - 13 (6.35)	0.25 (6.35)	1/2" NPT (5)	
5		0.79 (20)	7.25 (184.15)	8.50 (215.9)	8.68 (220.5)	1/2" - 13 (6.35)	0.25 (6.35)	3/4" NPT (1) & 1/2" NPT (5)	
7 1/2		0.79 (20)	7.25 (184.15)	8.50 (215.9)	8.68 (220.5)	1/2" - 13 (6.35)	0.25 (6.35)	3/4" NPT (1) & 1/2" NPT (5)	
10	213TC	0.79 (20)	7.25 (184.15)	8.50 (215.9)	8.68 (220.5)	1/2" - 13 (6.35)	0.25 (6.35)	3/4" NPT (1) & 1/2" NPT (5)	
15	254TC	0.79 (20)	7.25 (184.15)	8.50 (215.9)	8.68 (220.5)	1/2" - 13 (6.35)	0.25 (6.35)	3/4" NPT (1) & 1/2" NPT (5)	

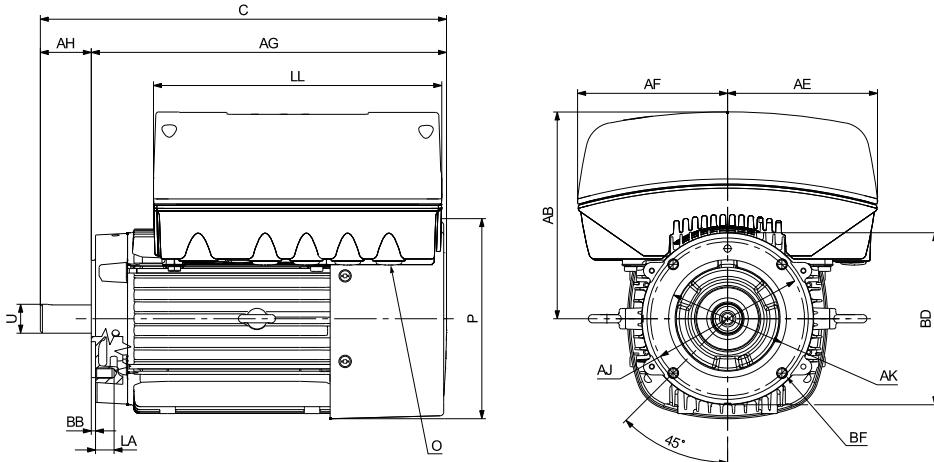MLE permanent-magnet motors 1 1/2 - 7 1/2 HP**1 1/2 - 7 1/2 HP (2-pole) 3/60/200-240**

TM06 6518 3316


Dimensional data

Power [HP]	NEMA frame	Stator housing [inches (mm)]							Shaft end [inches (mm)]	
		P	AB	AE	AF	C	AG	LL	U	AH
1 1/2	56C	4.80 (122)	6.22 (158)	5.28 (134)	5.28 (134)	12.13 (308)	10.04 (255)	9.13 (232)	0.63 (15.9)	2.06 (52.3)
2		4.80 (122)	6.22 (158)	5.28 (134)	5.28 (134)	12.91 (328)	10.83 (275)	9.13 (232)	0.63 (15.9)	2.06 (52.3)
3	182TC	7.53 (191.3)	7.917 (201)	5.73 (145.5)	5.73 (145.5)	15.89 (403.6)	13.15 (334)	11.02 (280)	1.13 (28.6)	2.74 (69.6)
5		7.53 (191.3)	7.91 (201)	5.73 (145.5)	5.73 (145.5)	15.89 (403.6)	13.15 (334)	11.02 (280)	1.13 (28.6)	2.74 (69.6)
7 1/2	213TC	10.04 (254.9)	9.33 (237)	6.81 (173)	6.81 (173)	18.70 (474.9)	15.31 (389)	12.48 (317)	1.37 (34.9)	3.38 (85.9)

Power [HP]	NEMA frame	Flange [inches (mm)]						Cable entries	
		LA	AJ	AK	BD	BF	BB	O	
1 1/2	56C	0.63 (16)	5.87 (149.2)	4.50 (114.3)	6.50 (165)	3/8" (4)	0.16		1/2" NPT (4)
2		1.42 (36)	5.87 (149.2)	4.50 (114.3)	6.50 (165)	3/8" (4)	0.16		1/2" NPT (4)
3	182TC	0.75 (19)	7.25 (184.15)	8.50 (215.9)	8.50 (215.9)	1/2"-13 (6.35)	0.25		1/2" NPT (5)
5		0.75 (19)	7.25 (184.15)	8.50 (215.9)	8.50 (215.9)	1/2"-13 (6.35)	0.25		1/2" NPT (5)
7 1/2	213TC	0.79 (20)	7.25 (184.15)	8.50 (215.9)	8.68 (220.5)	1/2"-13 (6.35)	0.25		3/4" NPT (1) & 1/2" NPT (5)

MLE asynchronous motors 20-30 HP

(2-pole) 3/60/460-480

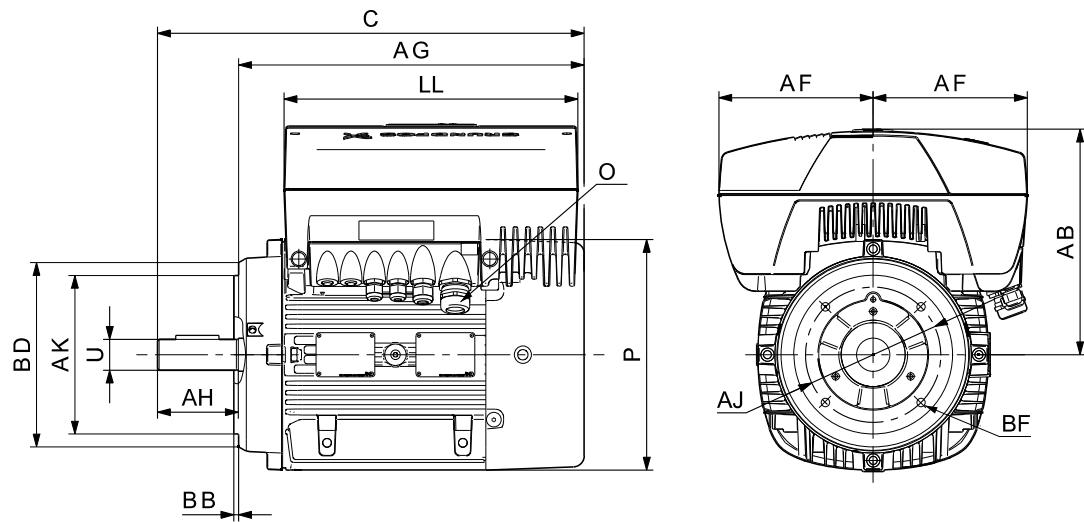

TM04 5498 3309

Dimensional data

Power [HP]	Nema frame	Stator housing [inches (mm)]							Shaft end [inches]	
		P	AB	AF	AF	C	AG	LL	U	AH
20	256TC	13.39 (340)	12.13 (308)	8.27 (210)	8.27 (210)	22.56 (573)	18.78 (477)	15.75 (400)	1.62 (41)	3.75 (95)
25	284TC	13.39 (340)	12.13 (308)	8.27 (210)	8.27 (210)	24.53 (623)	22.72 (577)	15.75 (400)	1.62 (41)	3.75 (95)
30	286TC	13.39 (340)	12.13 (308)	8.27 (210)	8.27 (210)	24.53 (623)	22.72 (577)	15.75 (400)	1.62 (41)	3.75 (95)

Power [HP]	Nema frame	Flange [inches (mm)]					Cable entries [mm]		
		AJ	AK	BD	BF	BB	O		
20	256TC	7.25 (184)	8.50 (216)	9.88 (251)	1/2" (7)	0.26	1 x M40 + 1 x M20 + 2 x M16 + 2 x knock out M16		
25	284TC	9.00 (229)	10.50 (267)	10.75 (273)	1/2" (8)	0.32	1 x M40 + 1 x M20 + 2 x M16 + 2 x knock out M16		
30	286TC	9.00 (229)	10.50 (267)	10.75 (273)	1/2" (8)	0.32	1 x M40 + 1 x M20 + 2 x M16 + 2 x knock out M16		


MLE motors for CRE-H and CRNE-H

(C-Face mounting with foot)



GR9035

Dimensional sketch

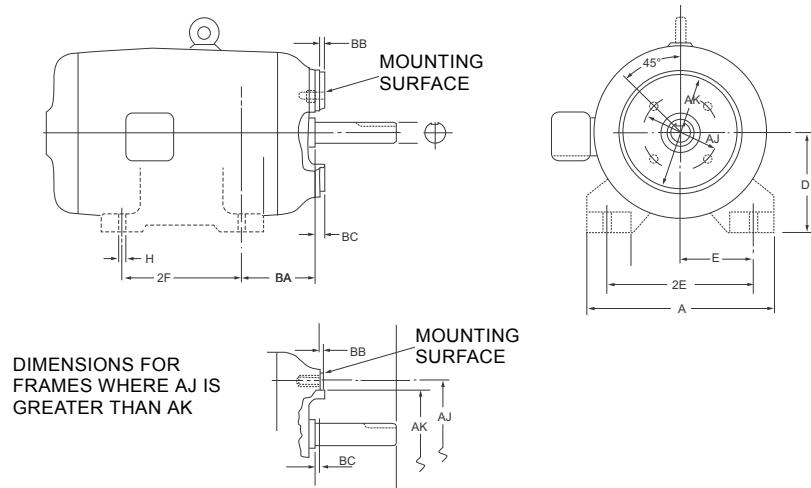

TM05_3012_0812

Dimensional data

Power [HP]	PH	NEMA frame size	Foot dimensions [inches]						
			A	D	E	2E	2F	BA + BC	H
One-phase 2-pole MLE motor with foot									
1/2	1	56C	6.00	3.50	2.44	4.88	3.00	2.56	0.34
3/4	1	56C	6.00	3.50	2.44	4.88	3.00	2.56	0.34
1	1	56C	6.00	3.50	2.44	4.88	3.00	2.56	0.34
1 1/2	1	56C	6.00	3.50	2.44	4.88	3.00	2.56	0.34
2	1	56C	6.00	3.50	2.44	4.88	3.00	2.56	0.34
Three-phase 2-pole MLE motor with foot									
1	3	56C	6.00	3.50	2.44	4.88	3.00	2.56	0.34
1 1/2	3	56C	6.00	3.50	2.44	4.88	3.00	2.56	0.34
2	3	56C	6.00	3.50	2.44	4.88	3.00	2.56	0.34
3	3	182TC	8.90	4.50	3.75	7.50	4.50	2.87	0.41
5	3	184TC	8.90	4.50	3.75	7.50	5.50	2.87	0.41
7 1/2	3	215TC	9.96	5.25	4.25	8.50	7.00	3.75	0.41
10	3	215TC	9.60	5.25	4.25	8.50	7.00	3.75	0.41
15	3	254TC	11.30	6.25	5.00	10.00	8.25	4.50	0.53
20	3	256TC	11.30	6.25	5.00	10.00	10.00	4.50	0.53
25	3	284TSC	12.30	7.00	5.50	11.00	9.50	5.00	0.53
30	3	286TSC	12.30	7.00	5.50	11.00	11.00	5.00	0.53

8. Control of E-pumps

Examples of E-pump applications

CRE-H, CRNE-H pumps are the ideal choice for a number of applications characterized by a demand for a variable flow rate at constant pressure. The pumps are suited for water supply systems and pressure boosting as well as for industrial applications.

Depending on the application, the pumps offer energy savings, increased comfort and improved processing.

E-pumps in the service of industry

The industry uses a large number of pumps in many different applications. Demands on pumps in terms of pump performance and mode of operation make speed control a must in many applications.

Some of the applications in which E-pumps are often used are listed below.

Constant pressure

- Water supply
- washing and cleaning systems
- distribution from waterworks
- humidifying systems
- water treatment systems
- process boosting systems, etc.

Example: Within industrial water supply, E-pumps with integrated pressure sensor are used to ensure a constant pressure in the pipe system. From the sensor, the E-pump receives inputs about changes of pressure as a result of changes in the consumption. The E-pump responds to the input by adjusting the speed until the pressure is equalized. The constant pressure is stabilized once more on the basis of a preset setpoint.

Constant temperature

- Air-conditioning systems at industrial plants
- industrial cooling systems
- industrial freezing systems
- casting and molding tools, etc.

Example: In industrial freezing systems, E-pumps with temperature sensor increase comfort and lower operating costs compared with pumps without a temperature sensor.

An E-pump continuously adapts its performance to the changing demands reflected in the differences in temperature of the liquid circulating in the freezing system. Thus, the lower the demand for cooling, the smaller the quantity of liquid circulated in the system and vice versa.

Constant level

- Boiler feed systems
- condensate systems
- sprinkler irrigation systems
- chemical industry, etc.

Example: In a steam boiler, it is important to be able to monitor and control pump operation to maintain a constant level of water in the boiler.

By using an E-pump with level sensor in the boiler, it is possible to maintain a constant water level.

A constant water level ensures optimum and cost-efficient operation as a result of a stable steam production.

Dosing applications

- Chemical industry, i.e. control of pH values
- petrochemical industry
- paint industry
- degreasing systems
- bleaching systems, etc.

Example: In the petrochemical industry, E-pumps with pressure sensor are used as dosing pumps. The E-pumps help to ensure that the correct mixture ratio is achieved when more liquids are combined.

E-pumps functioning as dosing pumps improve processing and offer energy savings.

E-pumps in commercial building services

Commercial building services use E-pumps to maintain a constant pressure or a constant temperature based on a variable flow rate.

Constant pressure

Water supply in high-rise buildings, such as office buildings and hotels.

Example: E-pumps with pressure sensor are used for water supply in high-rise buildings to ensure a constant pressure even at the highest draw-off point. As the consumption pattern and thus the pressure changes during the day, the E-pump continuously adapts its performance until the pressure is equalized.

Constant temperature

- Air-conditioning systems in hotels, schools, etc.
- building cooling systems, etc.

Example: E-pumps are an excellent choice for buildings where a constant temperature is essential. E-pumps keep the temperature constant in air-conditioned, high-rise glass buildings, irrespective of the seasonal fluctuations of the outdoor temperature and various heat impacts inside the building.

Control options

It is possible to communicate with CRE, CRIE, CRNE pumps via the following:

- control panel on the pump
- Grundfos R100 remote control
- Grundfos GO Remote
- central management system.

The purpose of controlling an E-pump is to monitor and control the pressure, temperature, flow rate and liquid level of the system.

Control panel on pump

The control panel on the E-pump terminal box makes it possible to change the setpoint settings manually.

MLE permanent-magnet motors

1/2 to 2 HP (1 x 200-240 V)

1 to 15 HP (3 x 440-480 V)

1 1/2 to 7 1/2 HP (3 x 200-240 V)

The operating condition of the pump is indicated by the Grundfos Eye on the control panel. See fig. 18.


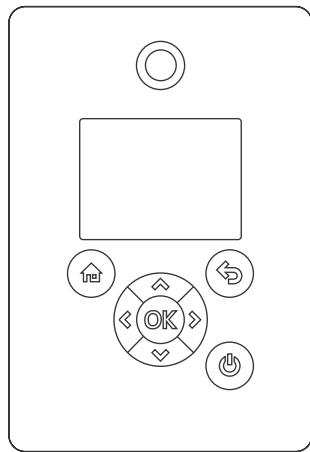


Fig. 18 Control panel on CRE pump

MLE asynchronous motors 20 to 30 HP (3 x 460-480 V)

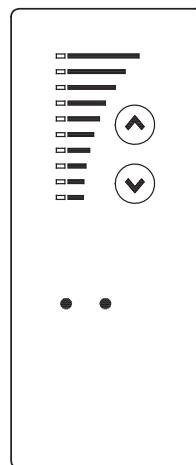

TM02 8513 0304


Fig. 19 Control panel on CRE pump

Grundfos GO Remote

The pump is designed for wireless radio or infrared communication with Grundfos GO Remote.

Grundfos GO Remote enables setting of functions and gives access to status overviews, technical product information and actual operating parameters.

Grundfos GO Remote offers three different mobile interfaces (MI).

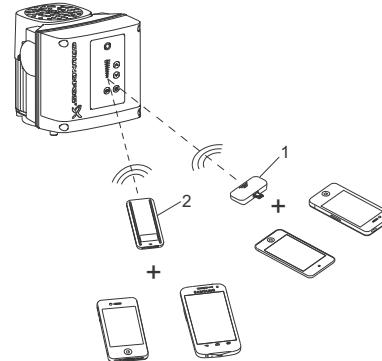

TM06 6256 0916

Fig. 20 Grundfos GO Remote communicating with the pump via radio or infrared connection (IR)

Pos.	Description
	Grundfos MI 204: Add-on module enabling radio or infrared communication. You can use MI 204 in conjunction with an Apple iPhone or iPod with Lightning connector, e.g., fifth generation or later iPhone or iPod. MI 204 is also available together with an Apple iPod touch and a cover.
1	Grundfos MI 301: Separate module enabling radio or infrared communication. You can use the module in conjunction with an Android or iOS-based smart device with Bluetooth connection.
2	

Central management system

Communication with the E-pump is possible even if the operator is not present near the E-pump.

Communication is enabled by connecting the E-pump to a central management system. This allows the operator to monitor the pump and to change control modes and setpoint settings.

Control management system

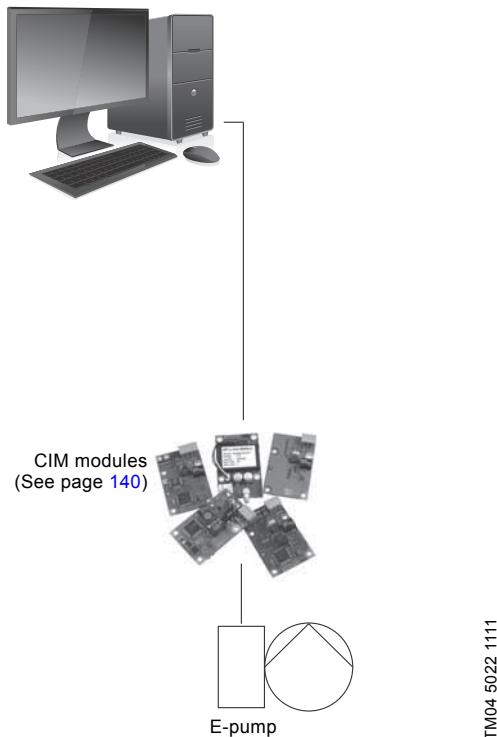


Fig. 21 Structure of a central management system

Control modes for E-pumps

Grundfos CRE-H, CRNE-H pumps are available in two variants:

- CRE-H, CRNE-H with integrated pressure sensor
- CRE-H, CRNE-H without sensor.

CRE-H, CRNE-H with integrated pressure sensor

Use CRE-H, CRNE-H pumps with integrated pressure sensor in applications where you want to control the pressure after the pump, irrespective of the flow rate. For further information, see section *Examples of E-pump applications* on page 22.

Signals of pressure changes in the pipe system are transmitted continuously from the sensor to the pump. The pump responds to the signals by adjusting its performance up or down to compensate for the pressure difference between the actual and the desired pressure. As this adjustment is a continuous process, a constant pressure is maintained in the pipe system.



TM04 4177 0909


Fig. 22 CRE-H pumps

CR-H, CRN-H, CRE-H, CRNE-H

A CRE-H, CRNE-H pump with integrated pressure sensor facilitates installation and commissioning. CRE-H, CRNE-H pumps with integrated pressure sensor can be set to either of these control modes:

- constant pressure (factory setting)
- constant curve.


In constant-pressure mode, the pump maintains a preset pressure after the pump, irrespective of the flow rate. See fig. 23.



TM00 9322 4796

Fig. 23 Constant-pressure mode

In constant-curve mode, the pump is not controlled. It can be set to pump according to a preset pump characteristic curve within the range from minimum curve to maximum curve. See fig. 24.



TM00 9323 1204

Fig. 24 Constant-curve mode

CRE-H, CRNE-H without sensor

CRE-H, CRNE-H pumps without sensor are suitable in these situations:

- Uncontrolled operation is required.
- Retrofit the sensor in order to control the flow rate, temperature, differential temperature, liquid level, pH value, etc. at some arbitrary point in the system.

MLE permanent-magnet motors

1/2 to 2 HP (1 x 200-240 V)

1 to 15 HP (3 x 440-480 V)

1 1/2 to 7 1/2 HP (3 x 200-240 V)

These CRE-H, CRNE-H pumps without sensor can be set to either of these control modes:

- Constant pressure
- constant differential pressure
- constant temperature
- constant differential temperature
- constant flow rate
- constant level
- constant curve
- constant other value.


MLE asynchronous motors

20 to 30 HP (3 x 460-480 V)

These CRE-H, CRNE-H pumps without sensor can be set to either of these control modes:

- Controlled operation
- uncontrolled operation (factory setting).

In controlled-operation mode, the pump adjusts its performance to the desired setpoint. See fig. 25.

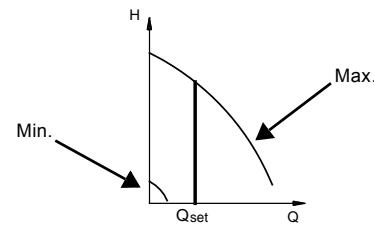

TM02 7264 2803

Fig. 25 Constant-flow mode

In uncontrolled-operation mode, the pump operates according to a preset pump characteristic curve. See fig. 24.

9. Advanced use of MLE motors

Introduction

Grundfos MLE motors have many features for the advanced user.

Grundfos three-phase MLE motors have features such as bearing monitoring, standstill heating, stop function, signal relays, analog sensors and limit exceeded. These features give a unique opportunity to customize the E-pumps.

The PC Tool E-products gives access to most of the settings available in the products, as well as the possibility of logging and viewing data.

All of these features are described below.

Bearing monitoring

Bearing monitoring is a built-in function indicating the time to relubricate or replace the bearings of the MLE motor. The relubrication feature is only available for three-phase pumps of 15-30 HP.

Purpose and benefits

The purpose of this function is to give an indication to the user when it is time to relubricate or replace the motor bearings. This is important information for maintenance planning.

Bearing monitoring provides these benefits:

- The bearing can be relubricated at the right time according to the manufacturer's recommendations.
- Maximum life of the motor bearings is obtained.
- Maintenance intervals are determined by the pump itself.
- No worn-down or damaged bearings, and consequently no costly down-time, due to overseen maintenance.

Description

When the bearing monitoring function determines that it is time to relubricate the bearings, the user will receive a warning via R100, PC Tool E-products, bus or relay.

When the bearings have been relubricated, a certain number of times, the warning function will inform the user to replace the bearings.

The number of relubrications before bearing replacement is set by Grundfos.

Technical description

The bearing monitoring function is available on two levels for calculating the relubrication interval, basic and advanced:

Bearing monitoring function
Basic level
Calculation of relubrication intervals based on motor revolutions. The basic level is a standard feature of the 15-30 HP basic controller and no special functional module is required.

Advanced level (only 15-30 HP)
Calculation of relubrication intervals based on motor revolutions and bearing temperature.

- Note:** The advanced-level function requires the following:
- The extended functional module is fitted in the MLE motor as standard.
 - Temperature sensors are fitted at the drive end and at the non-drive end of the motor.

Standstill heating

Standstill heating is a feature ensuring that even during standstill periods the motor windings have a certain minimum temperature.

Purpose and benefits

The purpose of this function is to make the MLE motor more suitable for outdoor installation. During standstill periods, there is a need to keep the motor temperature higher than the ambient temperature to avoid condensation in and on the motor.

Traditionally this issue has been solved by using an anti-condensation heater on the stator coil heads. Now Grundfos provides this feature by means of a special function within the MLE motor and terminal box.

The MLE motor has standstill heating included. An external heater on the stator coil is not necessary.

Applications

This function is especially suitable in outdoor applications and at installation sites with fluctuating temperatures.

Description

The working principle is that AC voltage is applied to the motor windings. The applied AC voltage will ensure that sufficient heat is generated to avoid condensation in the motor. The terminal box is kept warm and dry by the heat generated via the power supply. However, it is a condition that the terminal box is not exposed to open air. It must be provided with a suitable cover to protect it from rain.

Outdoor installation

According to UL 778-C22.2 No 108-14 pumps that are intended for outdoor use shall be marked enclosure type 3 and the product shall be tested with rated surface temperature down to -31 °F (-35 °C). The MLE enclosure is approved for type 3 or 4 and rated surface temperature down to 32 °F (0 °C), thus only for indoor use in UL 778-C22.2 No 108-14 pump applications. See the Installation and Operating Instructions for additional details.

Stop function

The stop function ensures that the pump is stopped at low or no flow. The function is also called low-flow stop function.

Purpose and benefits

The purpose of the stop function is to stop the pump when low flow is detected.

The stop function provides these benefits:

- The energy consumption is optimized and the system efficiency is improved.
- Unnecessary heating of the pumped liquid which damages pumps.
- Wear of the shaft seals is reduced.
- Noise from operation is reduced.

Applications

The stop function is used in systems with periodically low or no consumption thus preventing the pump from running against closed valve.

Operating conditions for the stop function

A pressure sensor, a check valve, and a diaphragm tank are required for the stop function to operate properly.

Note: The check valve must always be installed before the pressure sensor. See fig. 26 and fig. 27.

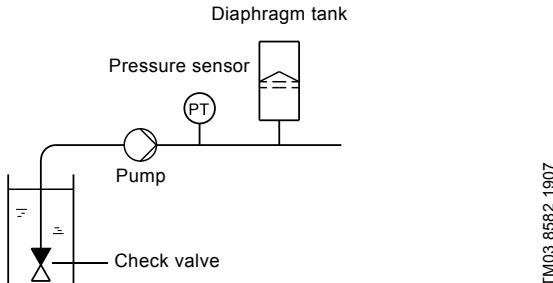


Fig. 26 Position of the check valve and pressure sensor in system with suction lift operation





Fig. 27 Position of the check valve and pressure sensor in system with positive inlet pressure

When low flow is detected, the pump is in on/off operation. If there is flow, the pump will continue operating according to the setpoint. See fig. 28.

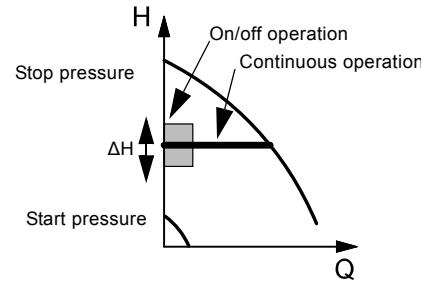

TM03 8477 1607

Fig. 28 Constant pressure with stop function.
Difference between start and stop pressures (ΔH)

Diaphragm tank

The stop function requires a diaphragm tank of a certain minimum size. The tank must be installed near the outlet of the pump, and the precharge air pressure must be 0.7 x setpoint.

Recommended diaphragm tank size:

Rated flow rate of pump [gpm (m^3/h)]	CRE-H pump	Typical diaphragm tank size [gal (liter)]
0-26 (0 - 5.9)	1s, 1, 3	2 (7.6)
27-105 (6.1 - 23.8)	5, 10, 15	4.4 (16.7)
106-176 (24.2 - 40)	20, 32	14 (53.0)
177-308 (40.2 - 70.0)	45	34 (128.7)
309-440 (70.2 - 99.9)	64, 90	62 (234.7)
441-750 (100-170)	120, 150	86 (325.5)

If a diaphragm tank of the above size is installed in the system, no additional adjustment should be necessary. If the tank installed is too small, the pump will start and stop often. Tank size will influence at which flow rate the system will go into start/stop operation.

Description

The low-flow stop function can operate in two different ways:

- by means of an integrated "low-flow detection function"
- by means of an external flow switch connected to the digital input.

Low-flow detection function

The low-flow detection function will check the flow rate regularly by reducing the speed for a short time. A small change in pressure or no change in pressure means that the flow rate is low.

Low-flow detection with flow switch

When a flow switch detects low flow, the digital input will be activated.

Contact Grundfos for further information.

Dry-running protection

This function protects the pump against dry running. When lack of inlet pressure or water shortage is detected, the pump will be stopped before being damaged.

Lack of inlet pressure or water shortage can be detected with a switch connected to a digital input configured to dry-running protection.


The use of a digital input requires an accessory, such as:

- a Grundfos Liqtec® dry-running switch (for more information on LiqTec, see section [15. Accessories](#))
- a pressure switch installed on the inlet side of the pump
- a float switch installed on the inlet side of the pump.

The pump cannot restart as long as the digital input is activated.

Temperature sensors 1 and 2

One or two Pt100 temperatures sensors may be connected to the input terminals 17, 18, 19, and 20.

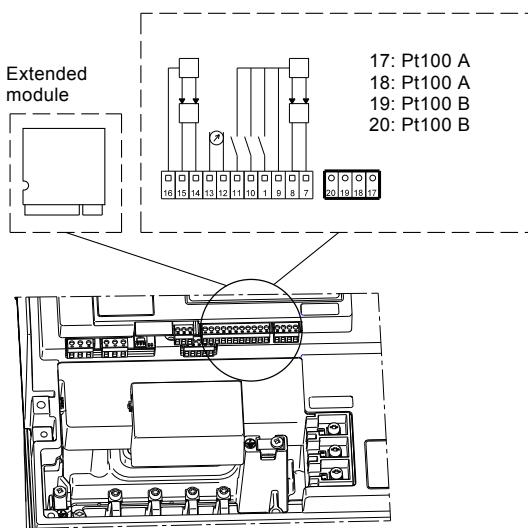

TM03 9191 3507

Fig. 29 Temperature sensor connections in the extended functional module

Purpose and benefits

The temperature sensor inputs 1 and 2 provide these benefits:

- The temperature sensor inputs can be used as input to the "limit exceeded" functions 1 and 2.
- In combination with the bearing monitoring function, the temperature sensors provide optimum monitoring of the motor bearings.
- A bearing warning or a bearing alarm can be indicated as the motor bearing temperature is measured.
- Status readings of the measured temperatures are available via R100, PC Tool E-products and bus.
- The function has a built-in signal fault detection if the temperature sensors fail or a conductor is broken.

Applications

The temperature inputs can be used in all applications where temperatures in the system or in the motor need to be monitored.

Note: The temperature sensor inputs are available on all MLE motors.

Description

The temperature sensor inputs enable several functions.

- The temperature sensor inputs 1 and 2 can be used as input to the "limit exceeded" functions 1 and 2. If a limit is exceeded, this will be indicated. The indication will be in the form of outputs (relay) or alarms/warnings set/defined in the "limit exceeded" functions 1 and 2.
- The temperature sensor inputs 1 and 2 can be set to measure bearing temperature. The measured values of temperature sensor 1 and 2 are used in the calculation of relubrication intervals. Additionally, the measured value can activate the indication of a bearing warning or a bearing alarm. In case of high bearing temperature, a warning or an alarm can be logged and force the pump to stop.

Signal relays

Signal relays are used to give an output indication of the current operational status of the MLE. The signal relay is a potential free contact (also called a dry contact). The output signals are typically transmitted to external control systems.

Purpose and benefits

The signal relays offer these features:

- The signal relays can be remotely (via bus) or internally controlled.
- The signal relays can be set to indicate several types of operational status.
- A relay delay can be defined to avoid activating the relay in case of periodic failures.

Applications

Signal relays can be used in all applications involving a need to read out the operational status to e.g. a control room or to a superior control system.

Description

The signal relays can be set with these three parameters:

- relay control
- relay setup
- relay delay.



Fig. 30 Signal relay parameters for 1/2 - 10 HP pumps



Fig. 31 Signal relay parameters for 15 - 30 HP pumps

Relay control

The relay time is 0 seconds and the signal relay is internally controlled.

The advanced relay control can only be set via the PC Tool E-products.

Relay control has these two setting options:

- **Internally controlled**
The relay is internally controlled by the variable frequency drive software according to the setup of the relay [Ready, Fault, Operation].
- **Remotely controlled**
The relay is controlled via commands from the GENIbus.

Analog sensor inputs 1 and 2

The analog sensor inputs 1 and 2 are standardized inputs for measuring all types of analog parameters. Sensor input 1 is the only sensor input set for closed-loop operation. The input will be used as the sensor feedback input.

Sensor input 2 is referred to as the secondary sensor.

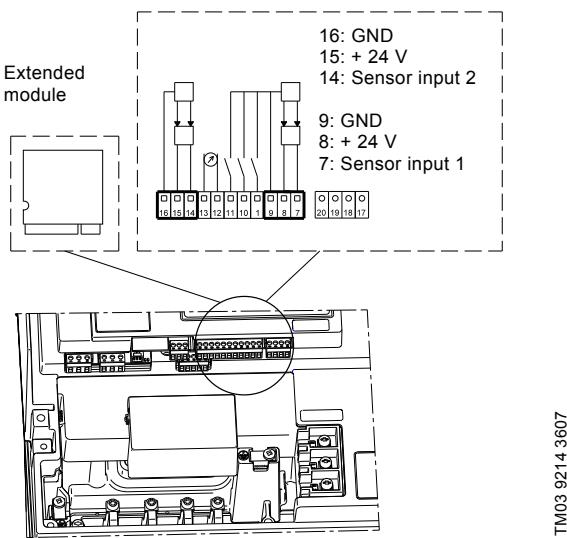


Fig. 32 Sensor inputs 1 and 2 connections

Purpose and benefits

The analog sensor inputs 1 and 2 provide these benefits:

- Sensor input 1 can be feedback input for the built-in PI controller.
- It is possible to monitor secondary parameters in the process, e.g. flow rate or liquid temperature.
- The secondary sensor can be set as a redundant sensor.
- The sensors can give input to the "limit exceeded" functions 1 and 2.
- Status readings of the inputs are available via R100 and PC Tool E-products.

Applications

Analog sensor inputs 1 and 2 can be used in applications with a need for monitoring essential parameters.

Description

The analog sensors 1 and 2 enable several functions.

- When the secondary sensor is set as an input to the "limit exceeded" functions 1 and 2, defined outputs or warnings or alarms can be given when system parameters are outside defined system limits.
- Connecting a flow sensor.
When sensor input 2 is set with a flow sensor, the measured value can be used as input to the proportional-pressure function. The flow rate displayed in R100 will be the measured flow rate instead of the estimated flow rate.

The flow rate measurement can also be used in the low-flow stop function to detect low flow instead of estimating the flow rate by lowering the speed of the pump.

- Sensor reading via R100 and PC Tool E-products. When sensors are set, the user can get a status reading via R100 and PC Tool E-products.

Analog output

Analog output

The analog output (0-10 mA) can be set via the PC Tool to one of these indications:

- feedback value
- speed
- frequency
- motor current
- external setpoint input
- limit exceeded.

The analog output is default set to not active.

Feedback value

The output signal is a function of the actual feedback sensor.

Speed

The output signal is a function of the actual pump speed.

Frequency

The output signal is a function of the actual frequency.

Motor current

The output signal is a function of the actual motor current.

External setpoint input

The output signal is a function of the external setpoint input.

Limit exceeded

The output signal indicates whether the limit is exceeded:

- Minimum output = limit is not exceeded.
- Maximum output = limit is exceeded.

Limit exceeded 1 and 2

Limit exceeded is a monitoring function monitoring one or two values/inputs. The function enables different inputs to activate various outputs and alarms/warnings when the signal input has exceeded pre-determined limits.

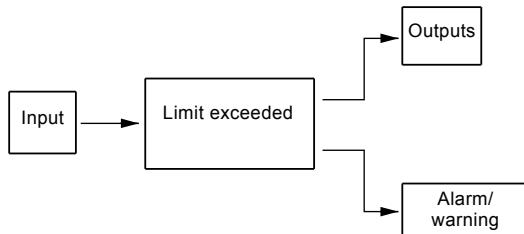


Fig. 33 Example of a "limit exceeded" sequence

Purpose and benefits

The purpose of this function is to monitor parameters which are central for the application. This will enable the controller to react to possible, abnormal operating conditions. This makes the E-pump a more important and integrated part of a system, and it can thus replace other existing monitoring units.

The liquid temperature can be monitored, and thus the E-pump can ensure that the system temperature does not exceed a maximum permissible level.

The minimum inlet pressure can be monitored, and thus the E-pump can prevent damage caused by a cavitation or dry run.

Applications

The limit exceeded function is typically used for monitoring secondary parameters in the systems.

Description

The figures below show two examples of setpoint monitoring by means of the limit exceeded function.

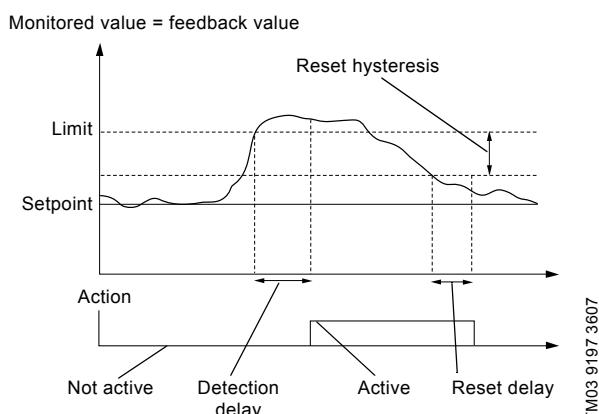


Fig. 34 Limit exceeded sequence with the limit type "max limit", for example monitoring of bearing temperature

Monitored value = feedback value

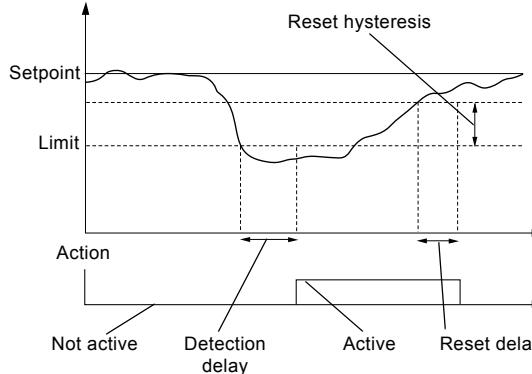


Fig. 35 Limit exceeded sequence with the limit type "min limit". When the limit is exceeded, the signal input crosses the limit as an increasing or decreasing value, and the function can be set to cover both situations.

Pump operating at power limit

When a pump operates at the power limit, the MLE motor will deliver an output corresponding to the maximum load stated on the nameplate. The maximum load will never be exceeded, see fig. 36.

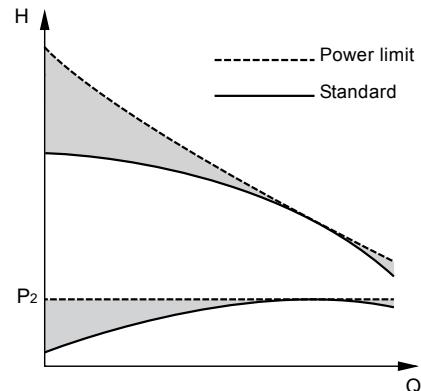


Fig. 36 Curves of a standard E-pump and a pump operating at power limit

Purpose and benefits

When using a standard pump at a low flow rate, the power consumption will drop and the motor will have excess power available.

By setting the CRE pump to operate at a higher speed, the excess power can be used to provide a higher pressure. The power limit function will make sure that the motor load never exceeds its maximum by decreasing the speed until the motor is at its power limit.

In cases where an undersized motor is used with standard speed, the power limit function will still reduce the speed and protect the motor against overload at a high flow rate. The solution offers the following benefits:

- reduced motor size
- reduced pump size

Figure 37 shows that a pump operating at low flow rates and relatively high pressures (1) can be fitted with an undersize motor with a rated power that matches this operating range. At higher flow rates and relatively lower pressures (2), the motor will reduce its speed when the power limit is exceeded and follow a steeper curve corresponding to the power available.


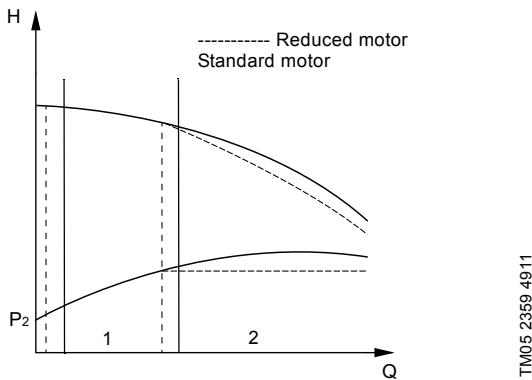


Fig. 37 Standard performance curve compared to a curve for a pump fitted with an undersize MLE motor.

The MLE motor can be set to a higher speed than standard, enabling the pump to deliver more pressure. The pump will operate at this higher speed until the pump reaches the flow rate where the motor is loaded to its full rated power. If the flow rate is increased further, the motor will reduce its speed so as not to exceed its rated power.

Using this function can, in some instances, enable use of a smaller pump to reach the desired duty point compared to a pump running with standard maximum speed, see fig. 38.

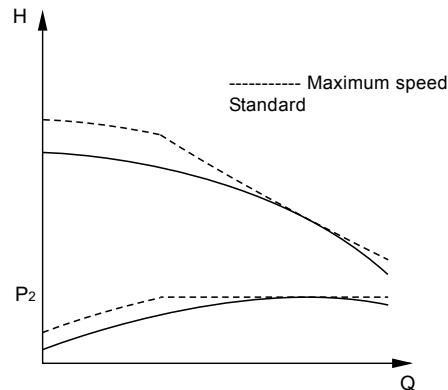

TM05 3314 5111

Fig. 38 Standard performance curve (60 Hz) compared to a performance curve for a pump running at maximum speed.

Applications

The power limit function is primarily used in applications where the motor size is dimensioned to be as small as possible to reduce size or cost. Or in applications demanding a high maximum speed to achieve a high pressure at a low flow rate. In both cases, the motor is protected by the power limit function at a higher flow rate where a lower speed is needed to prevent the motor from overloading.

Examples of application:

- Washing and clearing
- Boiler feed

Setup

The power limit is always active in CRE pumps to protect the motor against overload. Pumps with undersized motor and pumps with higher maximum speed are available as factory-configured products.

Note: Running at over-synchronous speed will affect the NPSH value, sufficient inlet pressure is therefore required.

Sound pressure level emitted from the pump and motor may increase at higher speeds.

Furthermore, the differential pressure over the chambers must be taken into consideration.

Stabilizing unstable pump curves

When the pump curve has a shape where it intersects the system curve at two points (A and B) with identical pressure but at different flow rates, the pump curve is defined as unstable, see fig. 39. This is especially problematic in systems with a flat system characteristic as it prevents the pump from being controlled to a flow rate which is lower than the flow rate at point B.

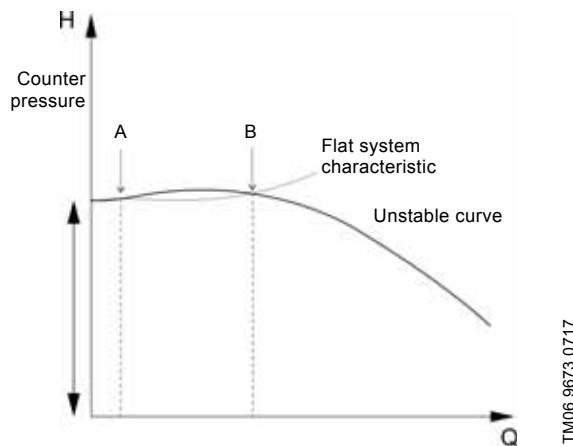


Fig. 39 Unstable pump curve

The E-motor can stabilize an unstable pump curve in the low flow area by changing to a higher speed. Fig. 40 illustrates how the pump curve is straightened out in this area. As the flow rate increases, the E-motor gradually reduces the speed to normal speed and the pump performance will follow the standard pump curve.

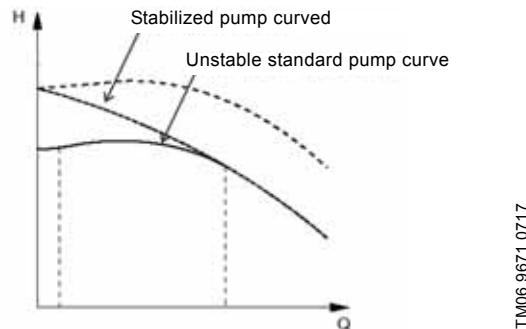


Fig. 40 Pump curve with a stabilized operating range

Purpose and benefits

The purpose of stabilizing an unstable pump is to enable normal control throughout the entire operating range. Thus fully stable operation is achieved, even in the low flow range. This enables the use of modern high-efficiency pumps in applications where this would otherwise not be possible.

Applications

As mentioned unstable operation may occur in applications with a high counterpressure and a flat system characteristic.

Examples of application:

- pumping of water to a water tower
- boiler feed

Note: Sound pressure level emitted from the pump and motor may increase at higher speeds.

Setup

This function is available in factory-configured products.

10. Construction

CR, CRE 1s, 1, 3, 5, 10, 15 and 20 H



Fig. 41 Product photo

Sectional drawing

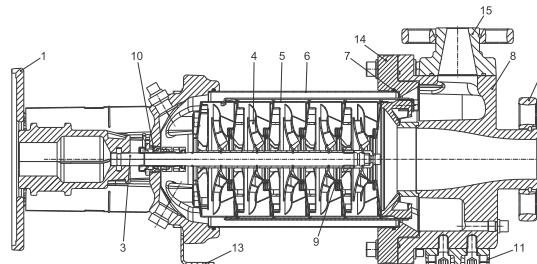


Fig. 42 Sectional drawing

Material specification

CR-H, CRE-H

Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Cast iron	A 48-30 B
3	Shaft	Stainless steel	AISI 316 ¹⁾ AISI 431 ²⁾
4	Impeller	Stainless steel	AISI 304
5	Chamber	Stainless steel	AISI 304
6	Outer sleeve	Stainless steel	AISI 304
7	O-ring for outer sleeve	EPDM or FKM	
8	Inlet-outlet housing	Ductile iron	A 80-55-06
9	Neck ring	PTFE	
10	Shaft seal	Cartridge type	
	Bearing rings	Silicon carbide	
	Rubber parts	EPDM or FKM	
11	Foot	Ductile iron	A 80-55-06
12	Flange ring	Ductile iron	A 80-55-06
13	Support bracket	Stainless steel	AISI 304
14	Sleeve flange ⁵⁾	Stainless steel	CF 8M ⁴⁾
15	Outlet port	Ductile iron	A 80-55-06

1) CR-H, CRE-H 1s, 1, 3, 5

2) CR-H, CRE-H 10, 15, 20

3) Stainless steel available on request

4) CF 8M is cast equivalent of AISI 316 stainless steel

5) CR-H, CRE-H 10, 15, 20 only; CR-H, CRE-H 1s, 1, 3, 5 do not have a sleeve flange.

6) CRN-H, CRNE-H 1s, 1, 3, 5

7) CRN-H, CRNE-H 10, 15, 20


CRN, CRNE 1s, 1, 3, 5, 10, 15 and 20 H



TM04 9547 4510

Fig. 43 Product photo

Sectional drawing

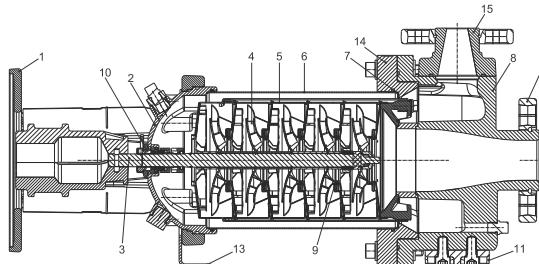

TM04 9676 4910

Fig. 44 Sectional drawing

Material specification

CRN-H, CRNE-H

Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Cast iron ³⁾	A 48-30 B
2	Pump head cover	Stainless steel	CF 8M ⁴⁾
3	Shaft	Stainless steel	AISI 316 ⁶⁾ AISI 329 ⁷⁾
4	Impeller	Stainless steel	AISI 316
5	Chamber	Stainless steel	AISI 316
6	Outer sleeve	Stainless steel	AISI 316
7	O-ring for outer sleeve	EPDM or FKM	
8	Inlet-outlet housing	Stainless steel	CF 8M ⁴⁾
9	Neck ring	PTFE	
10	Shaft seal	Cartridge type	
	Bearing rings	Silicon carbide	
	Rubber parts	EPDM or FKM	
11	Foot	Cast iron ³⁾	A 48-30 B
12	Flange ring	Ductile iron ³⁾	A 65-45-12
13	Support bracket	Stainless steel	AISI 304
14	Sleeve flange	Stainless steel	CF 8M ⁴⁾
15	Outlet port	Stainless steel	CF 8M ⁴⁾

CR, CRE 32, 45, 64, and 90 H

Fig. 45 Product photo

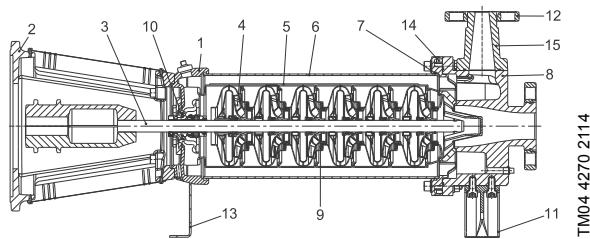
Sectional drawing

Fig. 46 Sectional drawing

Material specification**CR-H, CRE-H**

Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Ductile iron	A 80-55-06
2	Motor stool	Cast iron	A 48-30 B
3	Shaft	Stainless steel	AISI 431
4	Impeller	Stainless steel	AISI 304
5	Chamber	Stainless steel	AISI 304
6	Outer sleeve	Stainless steel	AISI 304
7	O-ring for sleeve	EPDM or FKM	
8	Inlet-outlet housing	Ductile iron	A 80-55-06
9	Neck ring	Carbon-graphite filled PTFE	
10	Shaft seal	Cartridge type	
	Bearing ring	Sic/Sic	
	Rubber parts	EPDM or FKM	
11	Foot	Ductile iron	A 80-55-06
12	Flange ring	Ductile iron	A 80-55-06
13	Support bracket	Stainless steel	AISI 304
14	Sleeve flange	Stainless steel	CF 8M ²⁾
15	Outlet port	Ductile iron	A 80-55-06

¹⁾ Stainless steel available on request²⁾ CF 8M is cast equivalent of AISI 316 stainless steel**CRN, CRNE 32, 45, 64, and 90 H**

Fig. 47 Product photo

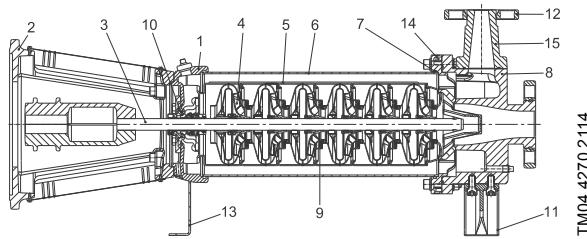
Sectional drawing

Fig. 48 Sectional drawing

Material specification**CRN-H, CRNE-H**

Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Stainless steel	CF 8M ²⁾
2	Motor stool	Cast iron	A 48-30 B
3	Shaft	Stainless steel	SAF 2205
4	Impeller	Stainless steel	AISI 316
5	Chamber	Stainless steel	AISI 316
6	Outer sleeve	Stainless steel	AISI 316
7	O-ring for sleeve	EPDM or FKM	
8	Inlet-outlet housing	Stainless steel	CF 8M ²⁾
9	Neck ring	Carbon-graphite filled PTFE	
10	Shaft seal	Cartridge type	
	Bearing ring	Sic/Sic	
	Rubber parts	EPDM or FKM	
11	Foot	Ductile iron ¹⁾	A 80-55-06
12	Flange ring	Ductile iron ¹⁾	A 65-45-12
13	Support bracket	Stainless steel	AISI 304
14	Sleeve flange	Stainless steel	CF 8M ²⁾
15	Outlet port	Stainless steel	CF 8M ²⁾

11. Operating conditions

Pumped liquids

We recommend CR(E)-H, CRN(E)-H pumps for thin, non-explosive liquids, not containing solid particles or fibers. The liquid must not chemically attack the pump materials. When pumping liquids with a density and/or viscosity higher than that of water, oversized motors may be used, if required.

Whether a pump is suitable for a particular liquid depends on a number of factors including the chloride content, pH value, temperature and content of chemicals, oils, etc.

Please note that aggressive liquids (e.g. sea water and some acids) may attack or dissolve the protective oxide film of the stainless steel and thus cause corrosion. The CR(E)-H, CRN(E)-H pump types are suitable for pumping the following:

CR-H, CRE-H

Non-corrosive liquids

For fluid transfer, circulation and pressure boosting of cold or hot, clean water or other non-corrosive liquids.

CRN-H, CRNE-H

- Industrial liquids

In systems where all parts in contact with the pumped liquid must be made of high-grade stainless steel.

List of pumped liquids

A number of typical liquids are listed on the following pages.

Other pump versions may be applicable, but those stated in the list are considered to be the best choices. The table is intended as a general guide only, and cannot replace actual testing of the pumped liquids and pump materials under specific working conditions. The list should, however, be applied with some caution as factors such as the following may affect the chemical resistance of a specific pump version:

- concentration of the pumped liquid
- liquid temperature
- pressure.


Safety precautions must be observed when pumping dangerous liquids.

The notes in this list apply to the table on the following page.

D	Often with additives.
E	Density and/or viscosity differ from that of water. Allow for this when calculating motor output and pump performance.
F	Pump selection depends on many factors. Contact Grundfos.
H	Risk of crystallization/precipitation in shaft seal
1	The pumped liquid is highly flammable.
2	The pumped liquid is combustible.
3	Insoluble in water.
4	Low self-ignition point.

Pumped liquid	Note	Liquid concentration, liquid temperature	CR		CRN	
			1s, 1, 3, 5, 10, 15, 20	32, 45, 64, 90, 120, 150	1s, 1, 3, 5, 10, 15, 20	32, 45, 64, 90, 120, 150
Acetic acid CH ₃ COOH		5 %, 68 °F			HQQE	HQQE/HBQE
Acetone CH ₃ COCH ₃	1, F	100 %, 68 °F			HBQE	HQQE/HBQE
Alkaline degreasing agent	D, F		HQQE	HQQE/HBQE		
Ammonium bicarbonate NH ₄ HCO ₃	E	20 %, 86 °F			HQQE	HQQE/HBQE
Ammonium hydroxide NH ₄ OH		20 %, 104 °F	HQQE	HQQE/HBQE		
Aviation fuel	1, 3, 4, F	100 %, 68 °F	HQBV	HQQV/HBQV		
Benzoic acid C ₆ H ₅ COOH	H	0.5 %, 68 °F			HQQV	HQQV/HBQV
Boiler water	F	< 248 °F 248 °F - 356 °F	HQQE	HQQE/HBQE -	-	-
Calcareous water		< 194 °F	HQQE	HQQE		
Calcium acetate (as coolant with inhibitor) Ca(CH ₃ COO) ₂	D, E	30 %, 122 °F	HQQE	HQQE		
Calcium hydroxide Ca(OH) ₂	E	Saturated solution, 122 °F	HQQE	HQQE		
Chloride-containing water	F	< 86 °F, max. 500 ppm			HQQE	HQQE
Chromic acid H ₂ CrO ₄	H	1 %, 68 °F			HQQV	HQQV/HBQV
Citric acid HOC(CH ₂ CO ₂ H) ₂ COOH	H	5 %, 104 °F			HQQE	HQQE/HBQE
Completely desalinated water (demineralized water)		< 248 °F			HQQE	HQQE/HBQE
Condensate		< 194 °F	HQQE	HQQE/HBQE		
Copper sulfate CuSO ₄	E	10 %, 122 °F			HQQE	HQQE
Corn oil	D, E, 3	100 %, 176 °F	HQVV	HQQV/HBQV		
Diesel oil	2, 3, 4, F	100 %, 68 °F	HQBV	HQQV/HBQV		
Domestic hot water (potable water)		< 248 °F	HQQE	HQQE/HBQE		
Ethanol (ethyl alcohol) C ₂ H ₅ OH	1, F	100 %, 68 °F	HQQE	HQQE/HBQE		
Ethylene glycol HOCH ₂ CH ₂ OH	D, E	50 %, 122 °F	HQQE	HQQE		
Formic acid HCOOH		5 %, 68 °F			HQQE	HQQE/HBQE
Glycerine (glycerol) OHCH ₂ CH(OH)CH ₂ OH	D, E	50 %, 122 °F	HQQE	HQQE/HBQE		
Hydraulic oil (mineral)	E, 2, 3	100 %, 212 °F	HQVV	HQQV/HBQE		
Hydraulic oil (synthetic)	E, 2, 3	100 %, 212 °F	HQVV	HQQV/HBQE		
Isopropyl alcohol CH ₃ CHOHCH ₃	1, F	100 %, 68 °F	HQBV	HQQV/HBQV		
Lactic acid CH ₃ CH(OH)COOH	E, H	10 %, 68 °F			HQQE	HQQE/HBQE
Linoleic acid C ₁₇ H ₃₁ COOH	E, 3	100 %, 68 °F	HQVV	HQQV/HBQV		
Methanol (methyl alcohol) CH ₃ OH	1, F	100 %, 68 °F	HQQE	HQQE/HBQE		
Motor oil	E, 2, 3	100 %, 176 °F	HQVV	HQQV/HBQV		
Naphthalene C ₁₀ H ₈	E, H	100 %, 176 °F	HQVV	HQQV/HBQV		
Nitric acid HNO ₃	F	1 %, 68 °F			HQQE	HQQE/HBQE
Oil-containing water		< 212 °F	HQVV	HQQV/HBQV		
Olive oil	D, E, 3	100 %, 176 °F	HQVV	HQQV/HBQV		
Oxalic acid (COOH) ₂	H	1 %, 68 °F			HQQE	HQQE/HBQE
Ozone-containing water (O ₃)		1 PPM, < 105 °F			HQQE	HQQE/HBQE
Peanut oil	D, E, 3	100 %, 194 °F	HQVV	HQQV/HBQV		
Petrol/gasoline	1, 3, 4, F	100 %, 68 °F	HQBV	HQQV/HBQV		
Phosphoric acid H ₃ PO ₄	E	20 %, 68 °F			HQVV	HQQV/HBQV
Propanol C ₃ H ₇ OH	1, F	100 %, 68 °F	HQVV	HQQV/HBQV		
Propylene glycol CH ₃ CH(OH)CH ₂ OH	D, E	50 %, 194 °F	HQQE	HQQE		
Potassium carbonate K ₂ CO ₃	E	20 %, 122 °F	HQQE	HQQE		
Potassium formate (as coolant with inhibitor) KOOCH	D, E	30 %, 122 °F	HQQE	HQQE		
Potassium hydroxide KOH	E	20 %, 122 °F			HQQE	HQQE
Potassium permanganate KMnO ₄		5 %, 68 °F			HQQE	HQQE/HBQE
Rape seed oil	D, E, 3	100 %, 176 °F	HQVV	HQQV/HBQV		
Salicylic acid C ₆ H ₄ (OH)COOH	H	0.1 %, 68 °F			HQQE	HQQE/HBQE
Silicone oil	E, 3	100 %	HQVV	HQQV/HBQV		
Sodium bicarbonate NaHCO ₃	E	10 %, 140 °F			HQQE	HQQE/HBQE
Sodium chloride (as coolant) NaCl	D, E	30 %, < 41 °F, pH > 8	HQQE	HQQE		
Sodium hydroxide NaOH	E	20 %, 122 °F			HQQE	HQQE
Sodium hypochlorite NaOCl	F	0.1 %, 68 °F			HQQE	HQQE
Sodium nitrate NaNO ₃	E	10 %, 140 °F			HQQE	HQQE/HBQE

Pumped liquid	Note	Liquid concentration, liquid temperature	CR		CRN	
			1s, 1, 3, 5, 10, 15, 20	32, 45, 64, 90, 120, 150	1s, 1, 3, 5, 10, 15, 20	32, 45, 64, 90, 120, 150
Sodium phosphate Na ₃ PO ₄	E, H	10 %, 140 °F			HQQE	HQQE
Sodium sulfate Na ₂ SO ₄	E, H	10 %, 140 °F			HQQE	HQQE/HBQE
Softened water		< 248 °F			HQQE	HQQE/HBQE
Soybean oil	D, E, 3	100 %, 176 °F	HQQV	HQQV/HBQV		
Sulfuric acid H ₂ SO ₄	F	1 %, 68 °F			HQKV	HQKV/HQKV
Sulfurous acid H ₂ SO ₃		1 %, 68 °F			HQQE	HQQE/HBQE
Swimming pool water (low chloride)		Max 5 ppm free chlorine (Cl ₂)	HQQE	HQQE/HBQE		

Maximum operating pressure and temperature range**ANSI flanged**

TM04 4039 0609

Pump type		Operating pressure	Liquid temperature range
CR(E), CRN(E) 1s-2 H	→ 1s-17 H	232 psi (16 bar)*	
CR(E), CRN(E) 1s-19 H	→ 1s-27 H	362 psi (25 bar)	
CR(E), CRN(E) 1-2 H	→ 1-17 H	232 psi (16 bar)*	
CR(E), CRN(E) 1-19 H	→ 1-27 H	362 psi (25 bar)	
CR(E), CRN(E) 3-2 H	→ 3-15 H	232 psi (16 bar)*	(-4 °F to +248 °F) (-20 °C to +120 °C)
CR(E), CRN(E) 3-17 H	→ 3-25 H	362 psi (25 bar)	
CR(E), CRN(E) 5-2 H	→ 5-15 H	232 psi (16 bar)*	
CR(E), CRN(E) 5-16 H	→ 5-24 H	362 psi (25 bar)	
CR(E), CRN(E) 10-1 H	→ 10-10 H	232 psi (16 bar)*	
CR(E), CRN(E) 10-12 H	→ 10-17 H	362 psi (25 bar)	
CR(E), CRN(E) 15-1 H	→ 15-8 H	232 psi (16 bar)*	
CR, CRN 15-9 H	→ 15-12 H	362 psi (25 bar)	
CR(E), CRN(E) 20-1 H	→ 20-7 H	232 psi (16 bar)*	(-4 °F to +248 °F) (-20 °C to +120 °C)
CR, CRN 20-8 H	→ 20-10 H	362 psi (25 bar)	
CR(E), CRN(E) 32-1-1 H	→ 32-5 H	232 psi (16 bar)*	
CR, CRN 32-6-2 H	→ 32-11-2 H	435 psi (30 bar)	
CR(E), CRN(E) 45-1-1 H	→ 45-4 H	232 psi (16 bar)*	
CR, CRN 45-5-2 H	→ 45-8-1 H	435 psi (30 bar)	(-22 °F to +248 °F) (-30 °C to +120 °C)
CR(E), CRN(E) 64-1-1 H	→ 64-3 H	232 psi (16 bar)*	
CR, CRN 64-4-2 H	→ 64-5-2 H	435 psi (30 bar)	
CR, CRN 90-1-1 H	→ 90-3 H	232 psi (16 bar)*	
CR, CRN 90-4-2 H	→ 90-4-1 H	435 psi (30 bar)	

* These pumps come standard with 125/150 lb. ANSI flanges. High pressure versions are available which will raise the operating pressure to the next rating.

Operating range of the shaft seal

The operating range of the shaft seal depends on operating pressure, pump type, type of shaft seal and liquid temperature. The following curves apply to clean water and water with anti-freeze liquids. For selecting the right shaft seal, see [List of pumped liquids](#) on page 36.

CR(E), CRN(E) 1s H through CR(E), CRN(E) 20 H

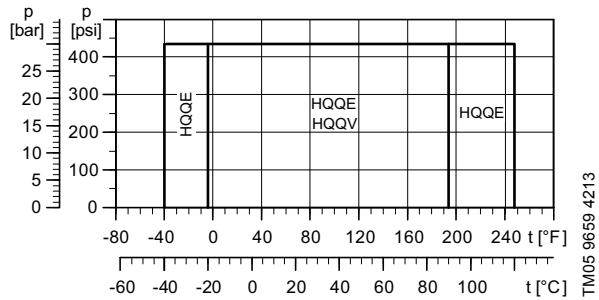


Fig. 49 Operating range of standard shaft seals for CR(E), CRN(E) 1s H to CR(E), CRN(E) 20 H

CR(E), CRN(E) 32 H through CR, CRN 90 H

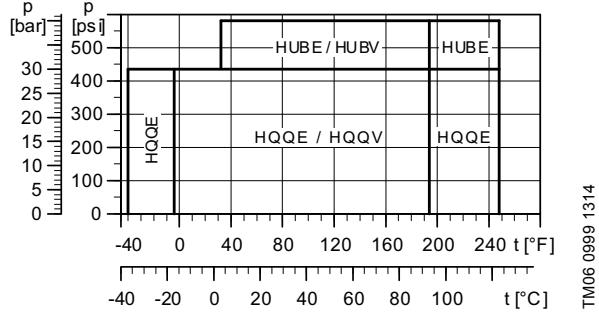


Fig. 50 Operating range of standard shaft seals for CR(E), CRN(E) 32 H to CR, CRN 90 H

Shaft seal	Description	Max. temp. range [°F]
HQQE	O-ring (cartridge) (balanced seal), SiC/SiC, EPDM	-40 to +248 °F
HBQE	O-ring (cartridge) (balanced seal), Carbon/SiC, EPDM	+32 to +248 °F
HBQV	O-ring (cartridge) (balanced seal), Carbon/SiC, FKM	+32 to +194 °F
HQQV	O-ring (cartridge) (balanced seal), SiC/SiC, FKM	-4 to +194 °F
HUBE	O-ring (cartridge) (balanced seal), TC/carbon, EPDM	+32 to +248 °F
HUBV	O-ring (cartridge) (balanced seal), TC/carbon, FKM	+32 to +194 °F

TC = tungsten carbide.

The pumping of liquids above 248 °F (120 °C) may result in periodical noise and reduced pump life. Standard CR-H, CRN-H pumps are not suitable for the pumping of liquids above 248 °F (120 °C) for long periods.

See the Grundfos "Custom-built Pumps" Product Guide for information about pumps for extreme temperatures and special conditions.

Maximum inlet pressure

The following table shows the maximum permissible inlet pressure. However, the current inlet pressure + the pressure against closed valve **must** always be lower than the maximum permissible operating pressure.

If the maximum permissible operating pressure is exceeded, the bearing in the motor may be damaged and the life of the shaft seal reduced.

Maximum inlet pressure CR(E)-H, CRN(E)-H

CR(E), CRN(E) 1s H

CR 1s-2 H → CR 1s-27 H 145 psi (10 bar)

CR(E), CRN(E) 1 H

CR 1-2 H → CR 1-25 H 145 psi (10 bar)
CR 1-27 H 217 psi (15 bar)

CR(E), CRN(E) 3 H

CR 3-2 H → CR 3-15 H 145 psi (10 bar)
CR 3-17 H → CR 3-25 H 217 psi (15 bar)

CR(E), CRN(E) 5 H

CR 5-2 H → CR 5-9 H 145 psi (10 bar)
CR 5-10 H → CR 5-24 H 217 psi (15 bar)

CR(E), CRN(E) 10 H

CR 10-1 H → CR 10-5 H 116 psi (8 bar)
CR 10-6 H → CR 10-17 H 145 psi (10 bar)

CR(E), CRN(E) 15 H

CR 15-1 H → CR 15-2 H 116 psi (8 bar)
CR 15-3 H → CR 15-12 H 145 psi (10 bar)

CR(E), CRN(E) 20 H

CR 20-1 H 116 psi (8 bar)
CR 20-2 H → CR 20-10 H 145 psi (10 bar)

CR(E), CRN(E) 32 H

CR 32-1-1 H → CR 32-2 H 58 psi (4 bar)
CR 32-3-2 H → CR 32-6 H 145 psi (10 bar)
CR 32-7-2 H → CR 32-11-2 H 217 psi (15 bar)

CR(E), CRN(E) 45 H

CR 45-1-1 H → CR 45-1 H 58 psi (4 bar)
CR 45-2-2 H → CR 45-3 H 145 psi (10 bar)
CR 45-4-2 H → CR 45-8-1 H 217 psi (15 bar)

CR(E), CRN(E) 64 H

CR 64-1-1 H 58 psi (4 bar)
CR 64-1 H → CR 64-2-1 H 145 psi (10 bar)
CR 64-2 H → CR 64-5-2 H 217 psi (15 bar)

CR, CRN 90 H

CR 90-1-1 H → CR 90-2-2 H 145 psi (10 bar)
CR 90-2-1 H → CR 90-4-1 H 217 psi (15 bar)

Example of operating and inlet pressures

The values for operating and inlet pressures shown in the tables must not be considered individually but must always be compared; see the following examples:

Example 1:

The following pump type has been selected:

CR 5-20 H-GA-A-E

Maximum operating pressure: **362 psi (25 bar)**

Maximum inlet pressure: **217 psi (15 bar)**

Outlet pressure against closed valve:

282 psi (652 ft). See page 54.

This pump is not allowed to start at an inlet pressure of 217 psi, but at an inlet pressure of:

362 - 282 = 80 psi (5.5 bar).

Example 2:

The following pump has been selected:

CR 10-2 H-G05-A-E

Maximum operating pressure: **232 psi (16 bar)**

Maximum inlet pressure: **116 psi (8 bar)**

Outlet pressure against closed valve:

42 psi (97 ft). See page 56.

This pump is allowed to start at an inlet pressure of 116 psi (8 bar), as the outlet pressure is only 42 psi (2.9 bar), which results in an operating pressure of 116 + 42 = **158 psi (11 bar)**. On the contrary, the maximum operating pressure of this pump is limited to 158 psi (11 bar), as a higher operating pressure will require an inlet pressure of more than 116 psi (8 bar).

12. Selection and sizing

Selection of pumps

Selection of pumps should be based on:

- duty point of the pump
- sizing data such as pressure loss as a result of height differences, friction loss in the pipes, pump efficiency etc.
- pump materials
- pipe dimensions
- shaft seal
- inlet pressure and operating pressure.

Duty point of the pump

From a duty point it is possible to select a pump on the basis of the curve charts in the section [13. Curve charts/technical data](#) starting on page 48.

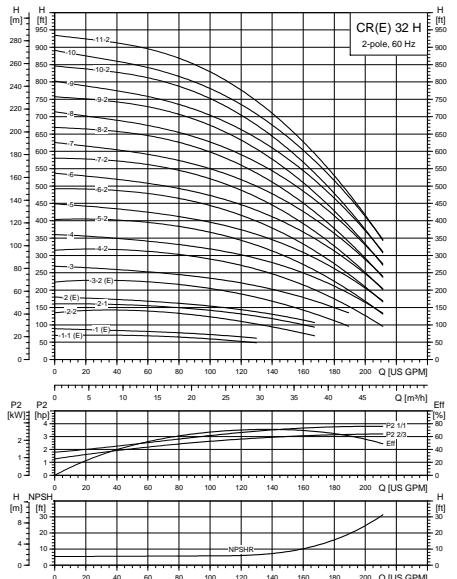


Fig. 51 Example of a curve chart

TM04 4551 1609

Sizing data

When sizing a pump the following must be taken into account.

- Required flow rate and pressure at the point of use.
- Pressure loss as a result of height differences (H_{geo}).
- Friction loss in the pipes (H_f).
It may be necessary to account for pressure loss in connection with long pipes, bends or valves, etc.
- Best efficiency at the estimated duty point.
- NPSH value.
For calculation of the NPSH value, see [Minimum inlet pressure, NPSHA](#) on page 45.

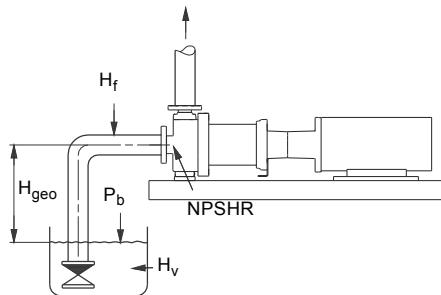


Fig. 52 Sizing data

TM04 3689 4804

Efficiency

Before determining the point of best efficiency, the operating pattern of the pump must be identified. If the pump is expected to operate in the same duty point, then select a CR(E)-H, CRN(E)-H pump which is operating in a duty point corresponding to the best efficiency of the pump.

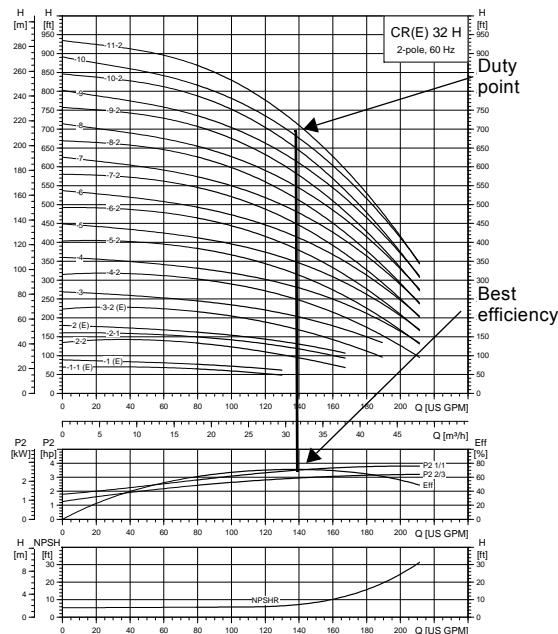


Fig. 53 Example of duty point

TM02 0039 1303

As the pump is sized on the basis of the highest possible flow rate, it is important to always have the duty point to the right of the optimum efficiency point (see fig. 54, range with check mark). This must be considered in order to keep efficiency high when the flow rate drops.

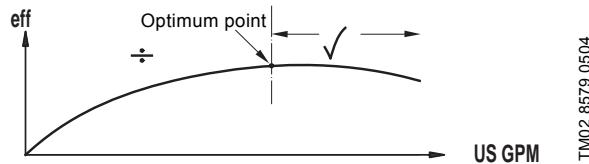


Fig. 54 Best efficiency

Normally, E-pumps are used in applications characterized by a variable flow rate. Consequently, it is not possible to select a pump that is constantly operating at optimum efficiency.

In order to achieve optimum operating economy, the pump should be selected on the basis of the following criteria:

- The maximum required duty point should be as close as possible to the QH curve of the pump.
- The required duty point must be positioned so that P2 is close to the maximum point of the 100 % curve.

Between the minimum and maximum performance curve E-pumps have an infinite number of performance curves each representing a specific speed. Therefore it may not be possible to select a duty point close to the 100 % curve.

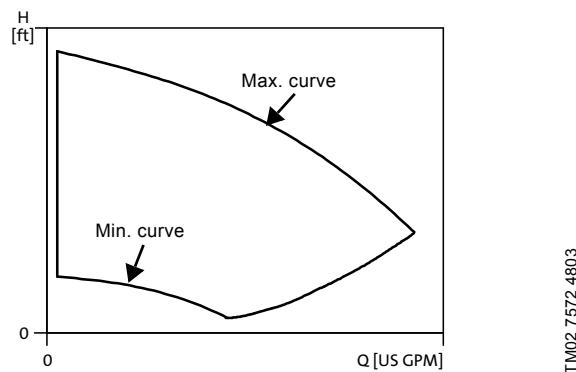


Fig. 55 Minimum and maximum performance curves

In situations where it is not possible to select a duty point close to the 100 % curve, the affinity equations to the right can be used. The head (H), the flow rate (Q) and the input power (P) are all the appropriate variables for the motor speed (n).

Note: The approximate formulas apply on condition that the system characteristic remains unchanged for n_n and n_x , and that it is based on the formula $H = k \times Q^2$, where k is a constant.

The power equation implies that the pump efficiency is unchanged at the two speeds. In practice this is **not** correct.

Finally, it is worth noting that the efficiencies of the frequency converter and the motor **must** be taken into account if a precise calculation of the power saving resulting from a reduction of the pump speed is wanted.

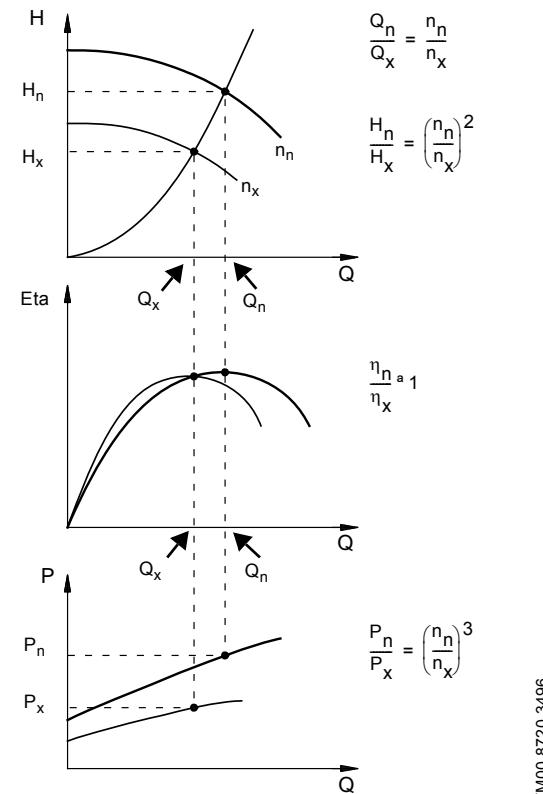


Fig. 56 Affinity equations

Legend

H_n	Rated head in feet
H_x	Current head in feet
Q_n	Rated flow rate in US gpm
Q_x	Current flow rate in US gpm
n_n	Rated motor speed in min^{-1} ($n_n = 3500 \text{ min}^{-1}$)
n_x	Current motor speed in min^{-1}
η_n	Rated efficiency in %
η_x	Current efficiency in %

Grundfos Product Center

We recommend that you size your pump in Grundfos Product Center, which is a selection program offered by Grundfos. For further information, see Grundfos Product Center.

Grundfos Product Center features a user-friendly and easy-to-use virtual guide which leads you through the selection of the pump for the application in question.

Pump materials

The material variant should be selected based on the liquid to be pumped. The product range covers the following two basic types:

- The CR-H, CRE-H pump types are suitable for clean, non-aggressive liquids such as potable water, oils, etc.
- The CRN-H, CRNE-H pump types are suitable for industrial liquids and acids. See [List of pumped liquids](#) on page 36 or contact Grundfos.

Pipe dimensions

CR(E)-H, CRN(E)-H pumps can be selected to comply with ANSI/ASME B73.1 pipes and most baseplate dimensions based on the ANSI/ASME B73.1.

CR(E)-H, CRN(E)-H pumps can also be selected with Grundfos end-suction pipe dimensions (GA is the only connector type available for CR, CRE 1s, 1, 3, 5 H pumps. See chart on page 11 for G22, G33, and G44 availability). When selecting your pump, please note:

Pipe connection (inlet x outlet x impeller size reference)	
GA	ANSI 1.5" x 1" x 6", 1.5" x 1" x 8"
G05	ANSI 2" x 1" x 10"
GB	ANSI 3" x 1.5" x 6", 3" x 1.5" x 8"
GC	ANSI 3" x 2" x 6"
G10	ANSI 3" x 2" x 6"
G50	ANSI 3" x 1.5" x 8", 3" x 1.5" x 10"
G60	ANSI 3" x 2" x 8", 3" x 2" x 10"
G20	ANSI 3" x 1.5" x 13"
G30	ANSI 3" x 2" x 13"
G70	ANSI 4" x 3" x 8", 4" x 3" x 10"
G40	ANSI 4" x 3" x 10", 4" x 3" x 13"
G22	ANSI 2" x 2"
G33	ANSI 3" x 3"
G44	ANSI 4" x 4"

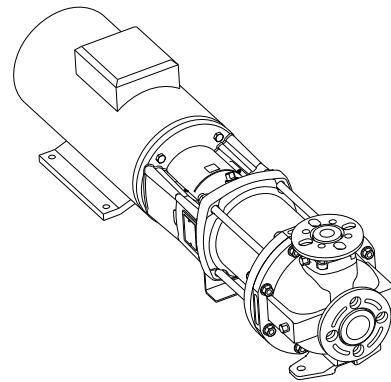


Fig. 57 CR-H pump

TM04 4539 1609




Fig. 58 Pump connections

TM04 4039 0609

Shaft seal

As standard, the CR(E)-H, CRN(E)-H range is fitted with a Grundfos shaft seal (cartridge type) suitable for the most common applications. See fig. 59.




Fig. 59 Shaft seal (cartridge type)

TM02 0538 4800

The following three key parameters **must** be taken into account, when selecting the shaft seal:

- type of pumped liquid
- liquid temperature
- maximum pressure.

Grundfos offers a wide range of shaft seal variants to meet specific demands. See [List of pumped liquids](#) on page 36.

Inlet pressure and operating pressure

Do **not** exceed the limit values stated on pages 39 and 41 as regards these pressures:

- maximum inlet pressure
- maximum operating pressure.

Minimum inlet pressure, NPSHA

We recommend calculating the inlet pressure "H" in these situations:

- The liquid temperature is high.
- The flow rate is significantly higher than the rated flow rate.
- Water is drawn from depths.
- Water is drawn through long pipes.
- Inlet conditions are poor.

To avoid cavitation, make sure that there is a minimum pressure on the inlet side of the pump. The maximum suction lift "H" in feet can be calculated as follows:

$$H = p_b - NPSHR - H_f - H_v - H_s$$

p_b = Barometric pressure in feet absolute.

(Barometric pressure can be set to 33.9 feet at sea level. In closed systems, p_b indicates system pressure in feet.)

NPSHR = Net Positive Suction Head Required in feet.

(To be read from the NPSHR curve at the highest flow rate the pump will be delivering).

H_f = Friction loss in inlet pipe in feet.

(At the highest flow rate the pump will be delivering.)

H_v = Vapor pressure in feet.

(To be read from the vapor pressure scale. " H_v " depends on the liquid temperature " T_m ").

H_s = Safety margin = minimum 2.0 feet.

If the "H" calculated is positive, the pump can operate at a suction lift of maximum "H" feet.

If the "H" calculated is negative, an inlet pressure of minimum "H" feet is required.

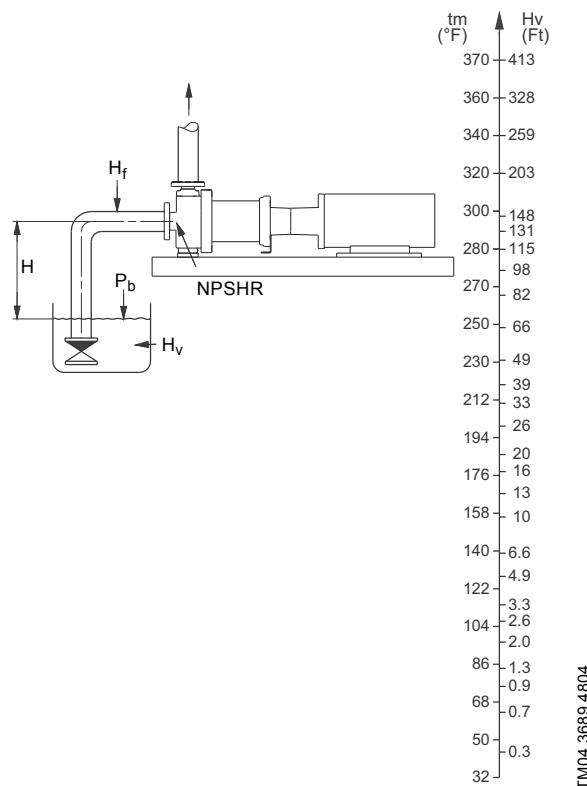


Fig. 60 Minimum inlet pressure - NPSHR

Note: In order to avoid cavitation **never** select a pump whose duty point lies too far to the right on the NPSHR curve.

Always check the NPSHR value of the pump at the highest possible flow rate. The NPSHR curves can be found in the curve charts starting on page 48.

Maximum inlet pressure

The table on page 41 states the maximum permissible inlet pressure. However, the actual inlet pressure + maximum pump pressure (at shut-off) must always be lower than the values stated in the table on page 39.

The pumps are pressure-tested at a pressure of 1.5 times the values stated on page 39.

How to read the curve charts

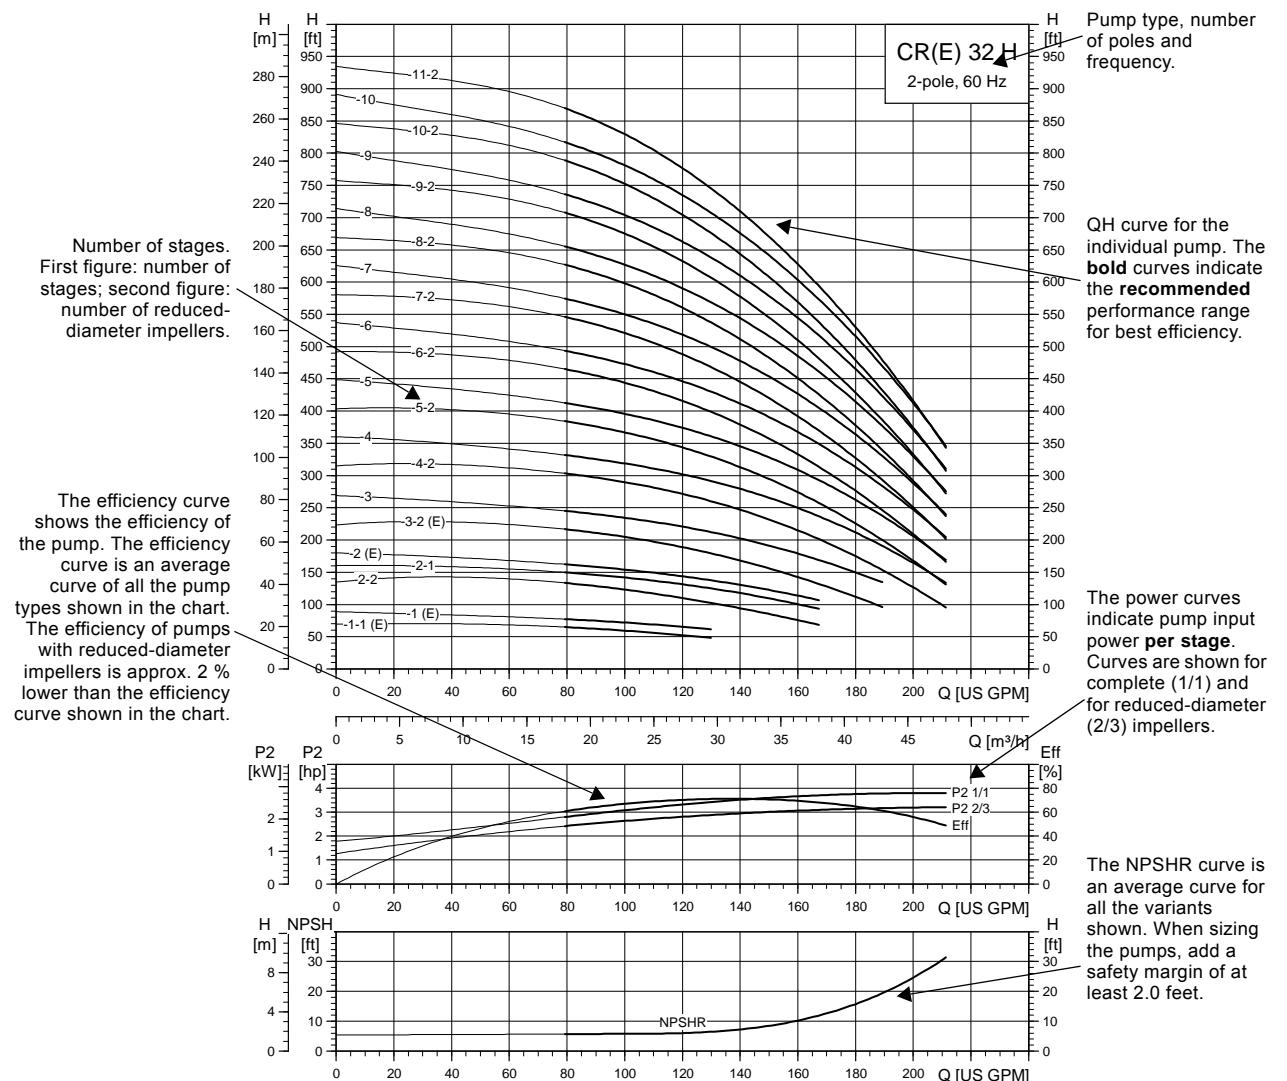


Fig. 61 How to read the curve charts


TM04-4991 6091

Guidelines to performance curves

The guidelines below apply to the curves shown on the following pages:

- The motors used for the measurements are standard motors (TEFC or MLE).
- Measurements have been made with airless water at a temperature of 68 °F (20 °C).
- The curves apply to a kinematic viscosity of $\nu = 1 \text{ mm}^2/\text{s}$ (1 cSt).
- Due to the risk of overheating, the pumps must not be used at a flow rate below the minimum flow rate.
- The QH curves apply to actual speed with the motor types mentioned at 60 Hz.

The curve below shows the minimum flow rate as a percentage of the nominal flow rate in relation to the liquid temperature. The dotted line shows a CR(E)-H, CRN(E)-H pump fitted with an air-cooled top assembly.

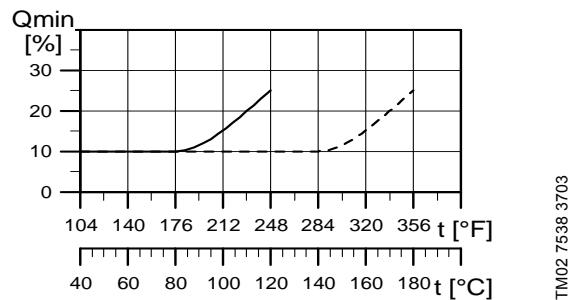


TM02 7538 3703

Fig. 62 Minimum flow rate


13. Curve charts/technical data

CR, CRN 1s H GA

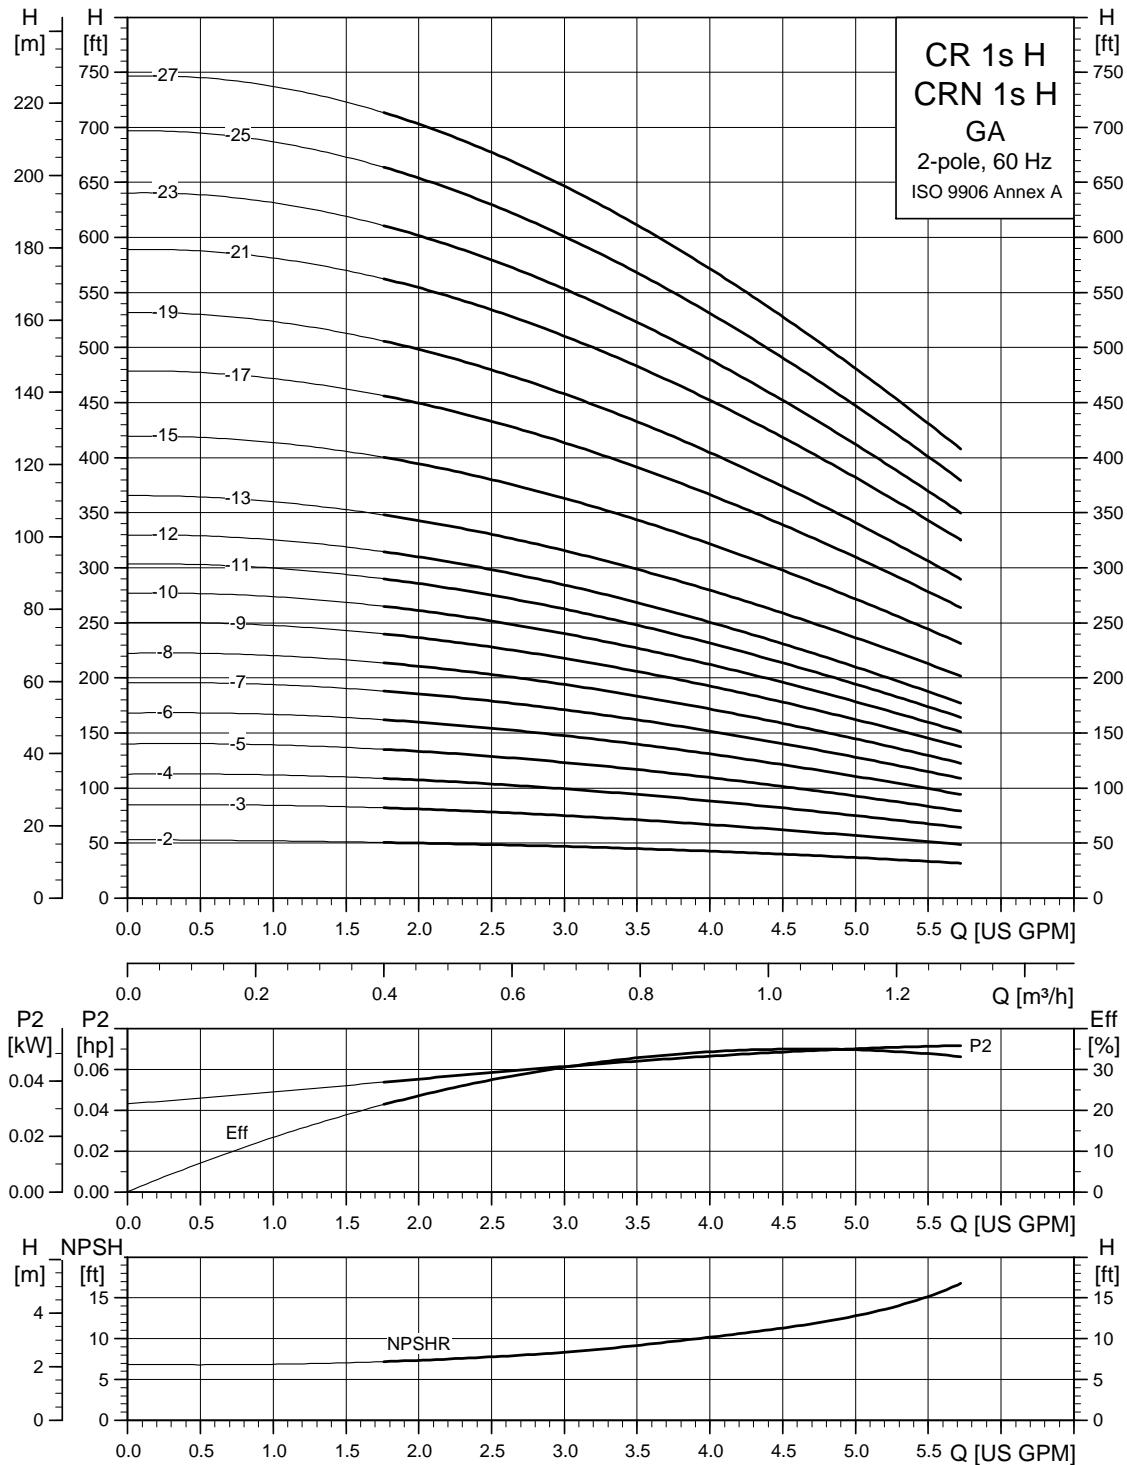

TM04 4545 4610

Dimensions and weights GA (1.5" x 1" x 6", 1.5" x 1" x 8")

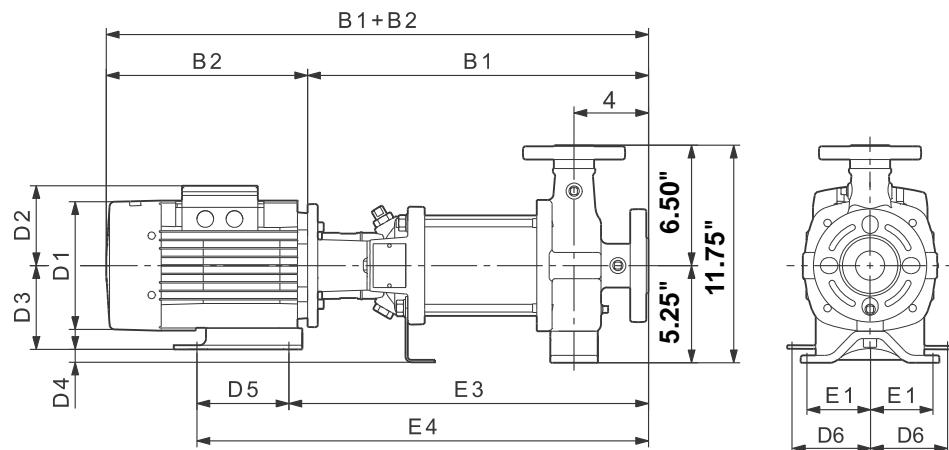


TM04 4642 0510


Pump type	HP	PH	Dimensions [inches]										Ship. wt. [lbs]	
			TEFC											
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	
CR(N) 1s-2 H	1/3	1	13.07	22.38	3.00	15.63	18.63	5.19	3.00	3.50	1.75	3.00	6.19	76
		3	13.07	20.69	3.00	15.63	18.63	4.63	3.50	3.50	1.75	3.00	5.57	73
CR(N) 1s-3 H	1/3	1	13.07	22.38	3.00	15.63	18.63	5.19	3.00	3.50	1.75	3.00	6.19	76
		3	13.07	20.69	3.00	15.63	18.63	4.63	3.50	3.50	1.75	3.00	5.57	73
CR(N) 1s-4 H	1/3	1	13.75	23.07	3.00	16.32	19.32	5.19	3.00	3.50	1.75	3.00	6.19	77
		3	13.75	21.38	3.00	16.32	19.32	4.63	3.50	3.50	1.75	3.00	5.57	74
CR(N) 1s-5 H	1/3	1	14.5	23.75	3.00	17.07	20.07	5.19	3.00	3.50	1.75	3.00	6.19	78
		3	14.5	22.07	3.00	17.07	20.07	4.63	3.50	3.50	1.75	3.00	5.57	75
CR(N) 1s-6 H	1/2	1	15.19	24.5	3.00	17.75	20.75	5.19	3.00	3.50	1.75	3.00	6.19	80
		3	15.19	22.82	3.00	17.75	20.75	4.63	3.50	3.50	1.75	3.00	5.57	76
CR(N) 1s-7 H	1/2	1	15.88	25.19	3.00	18.44	21.44	5.19	3.00	3.50	1.75	3.00	6.19	81
		3	15.88	23.50	3.00	18.44	21.44	4.63	3.50	3.50	1.75	3.00	5.57	77
CR(N) 1s-8 H	1/2	1	16.63	25.88	3.00	19.19	22.19	5.19	3.00	3.50	1.75	3.00	6.19	81
		3	16.63	24.19	3.00	19.19	22.19	4.63	3.50	3.50	1.75	3.00	5.57	77
CR(N) 1s-9 H	3/4	1	17.32	27.25	3.00	19.88	22.88	5.19	3.00	3.50	1.75	3.00	6.19	89
		3	17.32	24.94	3.00	19.88	22.88	4.63	3.50	3.50	1.75	3.00	5.57	79
CR(N) 1s-10 H	3/4	1	18.00	27.94	3.00	20.57	23.57	5.19	3.00	3.50	1.75	3.00	6.19	89
		3	18.00	25.63	3.00	20.57	23.57	4.63	3.50	3.50	1.75	3.00	5.57	79
CR(N) 1s-11 H	3/4	1	18.75	28.63	3.00	21.32	24.32	5.19	3.00	3.50	1.75	3.00	6.19	90
		3	18.75	26.32	3.00	21.32	24.32	4.63	3.50	3.50	1.75	3.00	5.57	80
CR(N) 1s-12 H	3/4	1	19.44	29.38	3.00	22.00	25.00	5.19	3.00	3.50	1.75	3.00	6.19	91
		3	19.44	27.07	3.00	22.00	25.00	4.63	3.50	3.50	1.75	3.00	5.57	81
CR(N) 1s-13 H	1	1	20.13	31.38	3.00	22.69	25.69	5.75	3.00	3.50	1.75	3.00	7.19	97
		3	20.13	27.75	3.00	22.69	25.69	4.63	3.50	3.50	1.75	3.00	5.57	82
CR(N) 1s-15 H	1	1	21.57	32.75	3.00	24.13	27.13	5.75	3.00	3.50	1.75	3.00	7.19	99
		3	21.57	29.19	3.00	24.13	27.13	4.63	3.50	3.50	1.75	3.00	5.57	84
CR(N) 1s-17 H	1 1/2	1	23.00	34.69	3.00	25.57	28.57	5.75	3.00	3.50	1.75	3.00	7.19	113
		3	23.00	31.75	3.00	25.57	28.57	4.63	3.50	3.50	1.75	3.00	5.57	86
CR(N) 1s-19 H	1 1/2	1	24.44	36.07	3.00	26.94	29.94	5.75	3.00	3.50	1.75	3.00	7.19	119
		3	24.44	33.19	3.00	26.94	29.94	4.63	3.50	3.50	1.75	3.00	5.57	92
CR(N) 1s-21 H	1 1/2	1	25.82	37.50	3.00	28.38	31.38	5.75	3.00	3.50	1.75	3.00	5.57	93
		3	25.82	34.63	3.00	28.38	31.38	4.63	3.50	3.50	1.75	3.00	5.57	120
CR(N) 1s-23 H	1 1/2	1	27.25	38.94	3.00	29.82	32.82	5.75	3.00	3.50	1.75	3.00	7.19	128
		3	27.25	36.00	3.00	29.82	32.82	4.63	3.50	3.50	1.75	3.00	5.57	101
CR(N) 1s-25 H	2	1	28.69	41.25	3.00	31.25	34.25	5.75	3.00	3.50	1.75	3.00	7.19	133
		3	28.69	40.07	3.00	31.25	34.25	4.38	3.50	3.50	1.75	3.00	7.07	124
CR(N) 1s-27 H	2	1	30.07	42.63	3.00	32.63	35.63	5.75	3.00	3.50	1.75	3.00	7.19	134
		3	30.07	41.44	3.00	32.63	35.63	4.38	3.50	3.50	1.75	3.00	7.07	125

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.

CR, CRE, CRN, CRNE 1 H GA

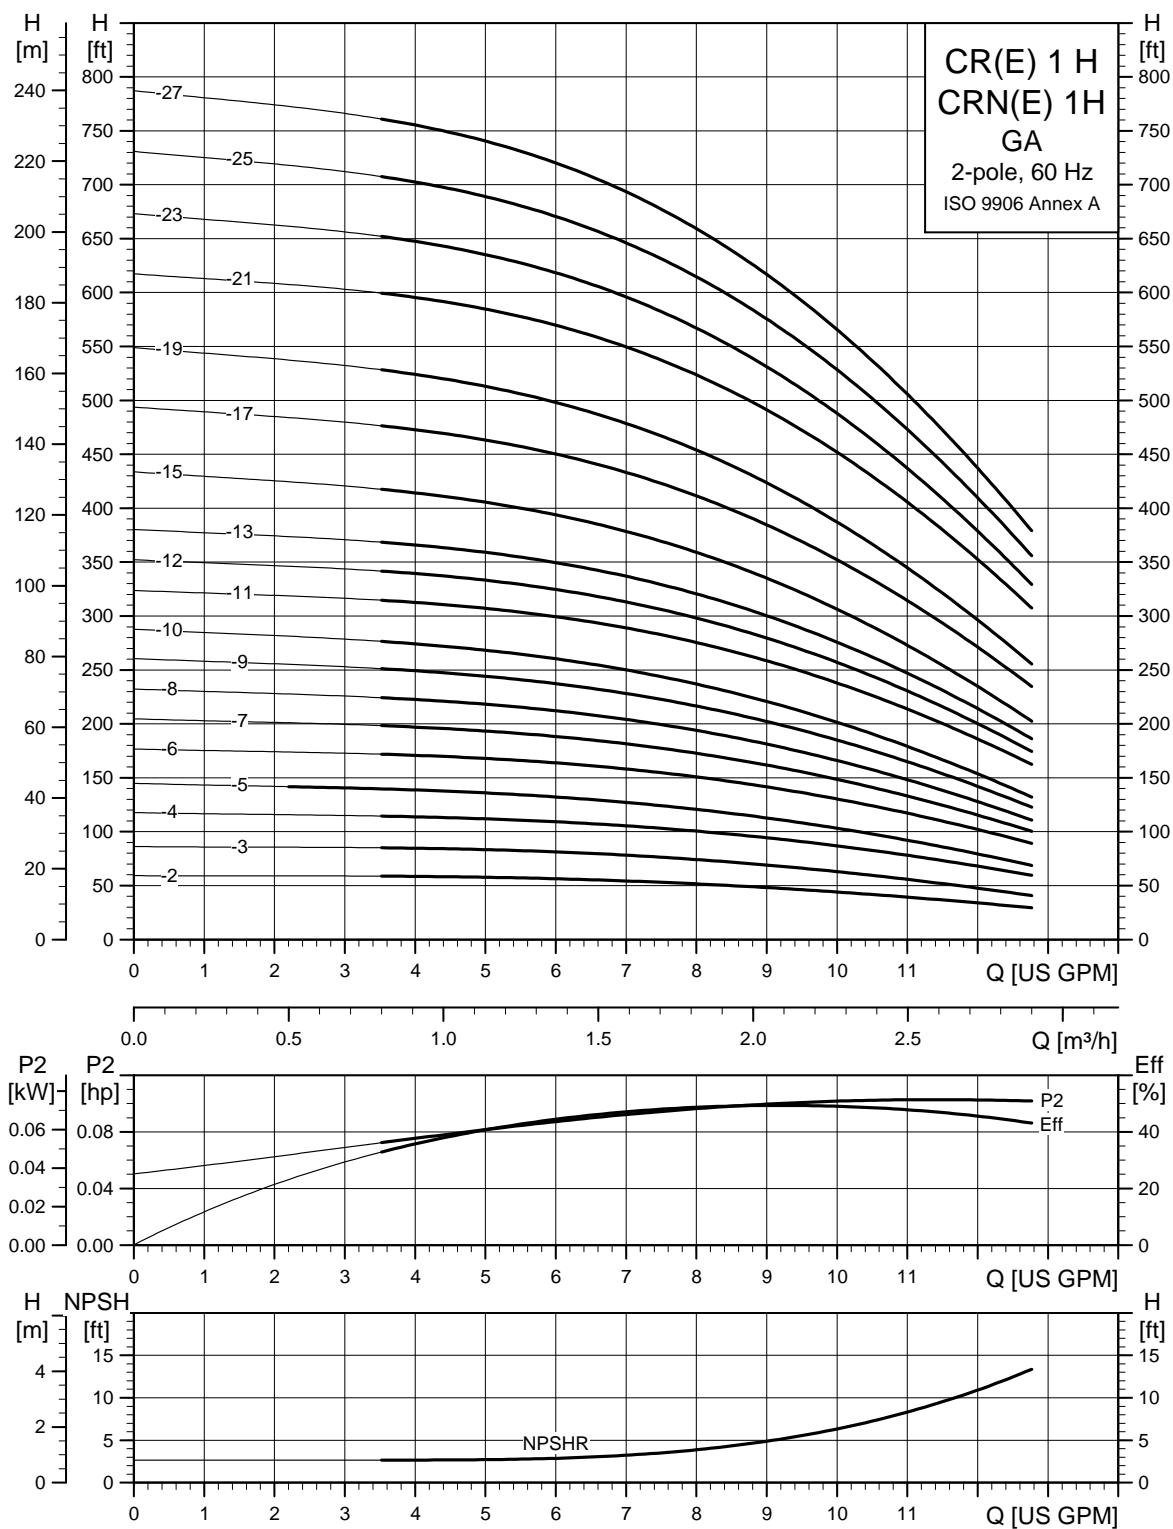

Dimensions GA (1.5" x 1" x 6", 1.5" x 1" x 8")

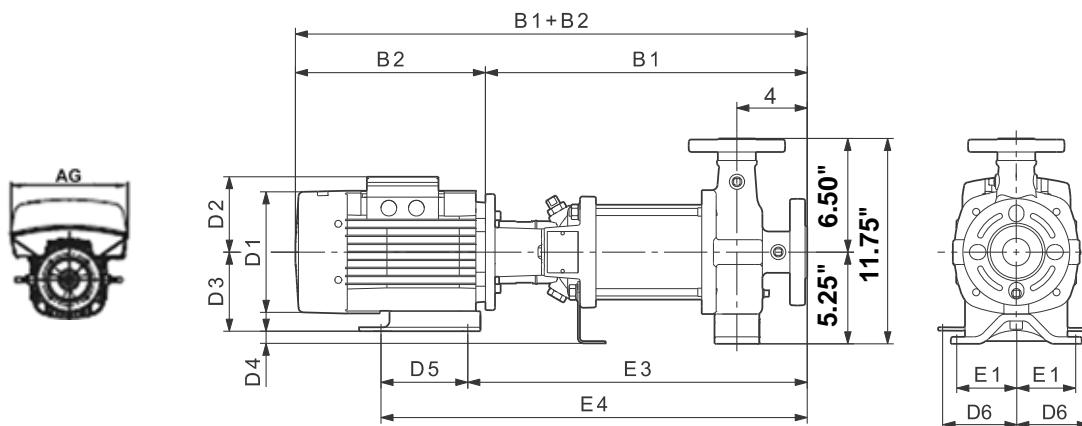


TM06 2478 1014 - TM04 4642 0310

Pump type	HP	PH	Dimensions [in]										Ship. wt. [lbs]	Dimensions [in]				Ship. wt. [lbs]
			TEFC											D1	D2	AG	B1+B2	
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6					
CR(N) 1-2 H	1/3	1	13.07	22.38	3.00	15.63	18.63	5.19	3.00	3.50	1.75	3.00	6.19	76	-	-	-	-
		3	13.07	20.69	3.00	15.63	18.63	4.63	3.50	3.50	1.75	3.00	5.57	73	-	-	-	-
CR(N) 1-3 H	1/3	1	13.07	22.38	3.00	15.63	18.63	5.19	3.00	3.50	1.75	3.00	6.19	76	-	-	-	-
		3	13.07	20.69	3.00	15.63	18.63	4.63	3.50	3.50	1.75	3.00	5.57	73	-	-	-	-
CR(N)(E) 1-4 H	1/2	1	13.75	23.07	3.00	16.32	19.32	5.19	3.00	3.50	1.75	3.00	6.19	78	4.80	6.22	8.34	22.21
		3	13.75	21.38	3.00	16.32	19.32	4.63	3.50	3.50	1.75	3.00	5.57	74	-	-	-	-
CR(N) 1-5 H	1/2	1	14.50	23.75	3.00	17.07	20.07	5.19	3.00	3.50	1.75	3.00	6.19	79	-	-	-	-
		3	14.50	22.07	3.00	17.07	20.07	4.63	3.50	3.50	1.75	3.00	5.57	75	-	-	-	-
CR(N)(E) 1-6 H	3/4	1	15.19	25.13	3.00	17.75	20.75	5.19	3.00	3.50	1.75	3.00	6.19	86	4.80	6.22	8.34	23.65
		3	15.19	22.82	3.00	17.75	20.75	4.63	3.50	3.50	1.75	3.00	5.57	76	-	-	-	-
CR(N) 1-7 H	3/4	1	15.88	25.82	3.00	18.44	21.44	5.19	3.00	3.50	1.75	3.00	6.19	87	-	-	-	-
		3	15.88	23.50	3.00	18.44	21.44	4.63	3.50	3.50	1.75	3.00	5.57	77	-	-	-	-
CR(N) 1-8 H	1	1	16.63	27.82	3.00	19.19	22.19	5.75	3.00	3.50	1.75	3.00	7.19	93	-	-	-	-
		3	16.63	24.19	3.00	19.19	22.19	4.63	3.50	3.50	1.75	3.00	5.57	78	-	-	-	-
CR(N)(E) 1-9 H	1	1	17.32	28.50	3.00	19.88	22.88	5.75	3.00	3.50	1.75	3.00	7.19	94	4.80	6.22	8.34	25.78
		3	17.32	24.94	3.00	19.88	22.88	4.63	3.50	3.50	1.75	3.00	5.57	79	4.80	6.22	10.56	27.36
CR(N)(E) 1-10 H	1 1/2	1	18.00	29.69	3.00	20.57	23.57	5.75	3.00	3.50	1.75	3.00	7.19	108	4.80	6.22	8.34	26.46
		3	18.00	26.82	3.00	20.57	23.57	4.63	3.50	3.50	1.75	3.00	5.57	81	4.80	6.22	10.56	28.04
CR(N) 1-11 H	1 1/2	1	18.75	30.44	3.00	21.32	24.32	5.75	3.00	3.50	1.75	3.00	7.19	108	-	-	-	-
		3	18.75	27.50	3.00	21.32	24.32	4.63	3.50	3.50	1.75	3.00	5.57	81	-	-	-	-
CR(N) 1-12 H	1 1/2	1	19.44	31.13	3.00	22.00	25.00	5.75	3.00	3.50	1.75	3.00	7.19	109	-	-	-	-
		3	19.44	28.25	3.00	22.00	25.00	4.63	3.50	3.50	1.75	3.00	5.57	82	-	-	-	-
CR(N)(E) 1-13 H	1 1/2	1	20.13	31.82	3.00	22.69	25.69	5.75	3.00	3.50	1.75	3.00	7.19	110	4.80	6.22	8.34	28.59
		3	20.13	28.94	3.00	22.69	25.69	4.63	3.50	3.50	1.75	3.00	5.57	83	4.80	6.22	10.56	30.17
CR(N)(E) 1-15 H	2	1	21.57	34.13	3.00	24.13	27.13	5.75	3.00	3.50	1.75	3.00	7.19	115	4.80	6.22	8.34	30.82
		3	21.57	32.94	3.00	24.13	27.13	4.38	3.50	3.50	1.75	3.00	7.07	106	4.80	6.22	10.56	32.40
CR(N)(E) 1-17 H	2	1	23.00	35.57	3.00	25.57	28.57	5.75	3.00	3.50	1.75	3.00	7.19	117	4.80	6.22	8.34	32.25
		3	23.00	34.38	3.00	25.57	28.57	4.38	3.50	3.50	1.75	3.00	7.07	108	4.80	6.22	10.56	33.83
CR(N) 1-19 H	3	1	25.32	39.94	3.00	28.94	34.44	6.75	4.50	4.50	0.75	5.50	8.63	154	-	-	-	-
		3	25.32	38.57	3.00	28.94	34.44	4.32	4.50	4.50	0.75	5.50	7.00	133	-	-	-	-
CR(N) 1-21 H	3	1	26.75	41.38	3.00	30.32	35.82	6.75	4.50	4.50	0.75	5.50	8.63	156	-	-	-	-
		3	26.75	39.94	3.00	30.32	35.82	4.32	4.50	4.50	0.75	5.50	7.00	135	-	-	-	-
CR(N)(E) 1-23 H	3	1	28.13	42.82	3.00	31.75	37.25	6.75	4.50	4.50	0.75	5.50	8.63	158	-	-	-	-
		3	28.13	41.38	3.00	31.75	37.25	4.32	4.50	4.50	0.75	5.50	7.00	137	4.80	6.22	10.56	38.96
CR(N) 1-25 H	3	1	29.57	44.19	3.00	33.19	38.69	6.75	4.50	4.50	0.75	5.50	8.63	159	-	-	-	-
		3	29.57	42.82	3.00	33.19	38.69	4.32	4.50	4.50	0.75	5.50	7.00	138	-	-	-	-
CR(N)(E) 1-27 H	3	1	31.00	45.63	3.00	34.57	40.07	6.75	4.50	4.50	0.75	5.50	8.63	161	-	-	-	-
		3	31.00	44.19	3.00	34.57	40.07	4.32	4.50	4.50	0.75	5.50	7.00	140	4.80	6.22	10.56	41.83

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

CR, CRE, CRN, CRNE 3 H GA

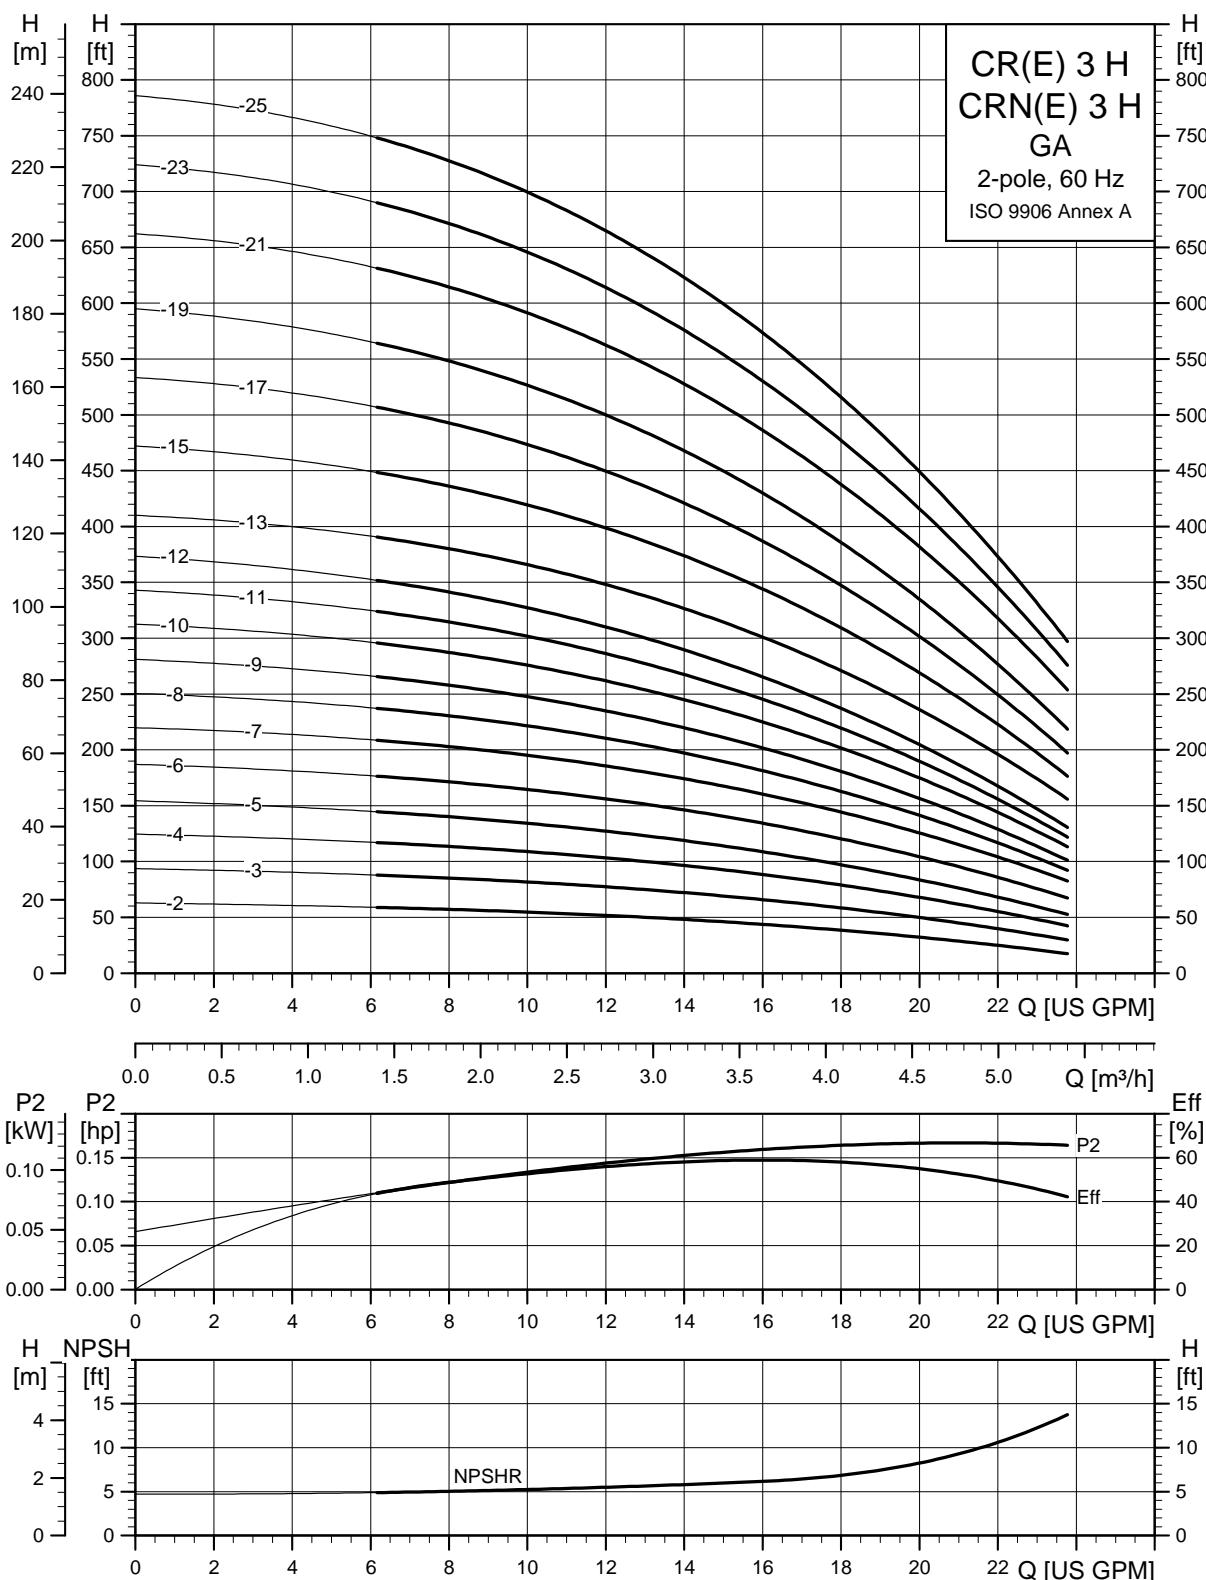

TWD44547 0912

Dimensions and weights GA (1.5" x 1" x 6", 1.5" x 1" x 8")

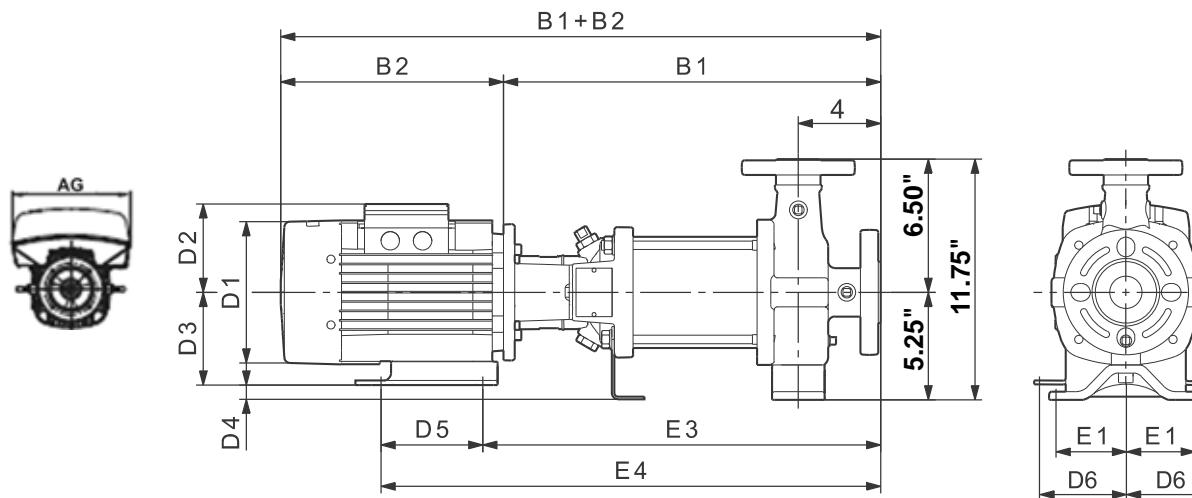

TM06 9699 1014 - TM04 4642 0310


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] MLE*				Ship. wt. [lbs]	
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	AG	B1+B2		
CR(N)(E) 3-2 H	1/3	1	13.07	22.38	3.00	15.63	18.63	5.19	3.00	3.50	1.75	3.00	6.19	76	-	-	-	-	-
		3	13.07	20.69	3.00	15.63	18.63	4.63	3.50	3.50	1.75	3.00	5.57	73	-	-	-	-	-
CR(N) 3-3 H	1/2	1	13.07	22.38	3.00	15.63	18.63	5.19	3.00	3.50	1.75	3.00	6.19	77	-	-	-	-	-
		3	13.07	20.69	3.00	15.63	18.63	4.63	3.50	3.50	1.75	3.00	5.57	73	-	-	-	-	-
CR(N)(E) 3-4 H	3/4	1	13.75	23.69	3.00	16.32	19.32	5.19	3.00	3.50	1.75	3.00	6.19	84	4.80	6.22	8.34	22.21	78
		3	13.75	21.38	3.00	16.32	19.32	4.63	3.50	3.50	1.75	3.00	5.57	74	-	-	-	-	-
CR(N)(E) 3-5 H	3/4	1	14.50	24.38	3.00	17.07	20.07	5.19	3.00	3.50	1.75	3.00	6.19	85	4.80	6.22	8.34	22.96	79
		3	14.50	22.07	3.00	17.07	20.07	4.63	3.50	3.50	1.75	3.00	5.57	75	-	-	-	-	-
CR(N)(E) 3-6 H	1	1	15.19	26.38	3.00	17.75	20.75	5.75	3.00	3.50	1.75	3.00	7.19	91	4.80	6.22	8.34	23.65	80
		3	15.19	22.82	3.00	17.75	20.75	4.63	3.50	3.50	1.75	3.00	5.57	76	4.80	6.22	10.56	25.23	87
CR(N) 3-7 H	1 1/2	1	15.88	27.57	3.00	18.44	21.44	5.75	3.00	3.50	1.75	3.00	7.19	105	-	-	-	-	-
		3	15.88	24.69	3.00	18.44	21.44	4.63	3.50	3.50	1.75	3.00	5.57	78	-	-	-	-	-
CR(N)(E) 3-8 H	1 1/2	1	16.63	28.32	3.00	19.19	22.19	5.75	3.00	3.50	1.75	3.00	7.19	106	4.80	6.22	8.34	25.09	84
		3	16.63	25.38	3.00	19.19	22.19	4.63	3.50	3.50	1.75	3.00	5.57	79	4.80	6.22	10.56	26.67	89
CR(N)(E) 3-9 H	1 1/2	1	17.32	29.00	3.00	19.88	22.88	5.75	3.00	3.50	1.75	3.00	7.19	107	4.80	6.22	8.34	25.78	85
		3	17.32	26.13	3.00	19.88	22.88	4.63	3.50	3.50	1.75	3.00	5.57	80	4.80	6.22	10.56	27.36	90
CR(N) 3-10 H	2	1	18.00	30.57	3.00	20.57	23.57	5.75	3.00	3.50	1.75	3.00	7.19	111	-	-	-	-	-
		3	18.00	29.44	3.00	20.57	23.57	4.38	3.50	3.50	1.75	3.00	7.07	102	-	-	-	-	-
CR(N) 3-11 H	2	1	18.75	31.32	3.00	21.32	24.32	5.75	3.00	3.50	1.75	3.00	7.19	111	-	-	-	-	-
		3	18.75	30.13	3.00	21.32	24.32	4.38	3.50	3.50	1.75	3.00	7.07	102	-	-	-	-	-
CR(N)(E) 3-12 H	2	1	19.44	32.00	3.00	22.00	25.00	5.75	3.00	3.50	1.75	3.00	7.19	112	4.80	6.22	8.34	28.69	91
		3	19.44	30.82	3.00	22.00	25.00	4.38	3.50	3.50	1.75	3.00	7.07	103	4.80	6.22	10.56	30.27	95
CR(N) 3-13 H	3	1	21.07	35.69	3.00	24.69	30.19	6.75	4.50	4.50	0.75	5.50	8.63	139	-	-	-	-	-
		3	21.07	34.25	3.00	24.69	30.19	4.32	4.50	4.50	0.75	5.50	7.00	118	-	-	-	-	-
CR(N)(E) 3-15 H	3	1	22.44	37.13	3.00	26.07	31.57	6.75	4.50	4.50	0.75	5.50	8.63	141	-	-	-	-	-
		3	22.44	35.69	3.00	26.07	31.57	4.32	4.50	4.50	0.75	5.50	7.00	120	4.80	6.22	10.56	33.27	111
CR(N)(E) 3-17 H	3	1	23.88	38.57	3.00	27.50	33.00	6.75	4.50	4.50	0.75	5.50	8.63	152	-	-	-	-	-
		3	23.88	37.13	3.00	27.50	33.00	4.32	4.50	4.50	0.75	5.50	7.00	131	4.80	6.22	10.56	34.71	122
CR(N) 3-19 H	5	1	25.32	40.82	3.00	29.07	34.57	8.07	4.50	5.25	0.00	5.50	10.63	190	-	-	-	-	-
		3	25.32	40.82	3.00	29.07	34.57	5.25	4.50	4.50	0.75	5.50	8.69	173	-	-	-	-	-
CR(N) 3-21 H	5	1	26.75	42.25	3.00	30.50	36.00	8.07	4.50	5.25	0.00	5.50	10.63	192	-	-	-	-	-
		3	26.75	42.25	3.00	30.50	36.00	5.25	4.50	4.50	0.75	5.50	8.69	175	-	-	-	-	-
CR(N) 3-23 H	5	1	28.13	43.69	3.00	31.88	37.38	8.07	4.50	5.25	0.00	5.50	10.63	194	-	-	-	-	-
		3	28.13	43.63	3.00	31.88	37.38	5.25	4.50	4.50	0.75	5.50	8.69	176	-	-	-	-	-
CR(N)(E) 3-25 H	5	1	29.57	45.07	3.00	33.32	38.82	8.07	4.50	5.25	0.00	5.50	10.63	195	-	-	-	-	-
		3	29.57	45.07	3.00	33.32	38.82	5.25	4.50	4.50	0.75	5.50	8.69	178	7.53	7.91	11.46	42.72	152

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

¹⁾ CRE 3-2 H is fitted with 1/2 HP motor.

CR, CRE, CRN, CRNE 5 H GA

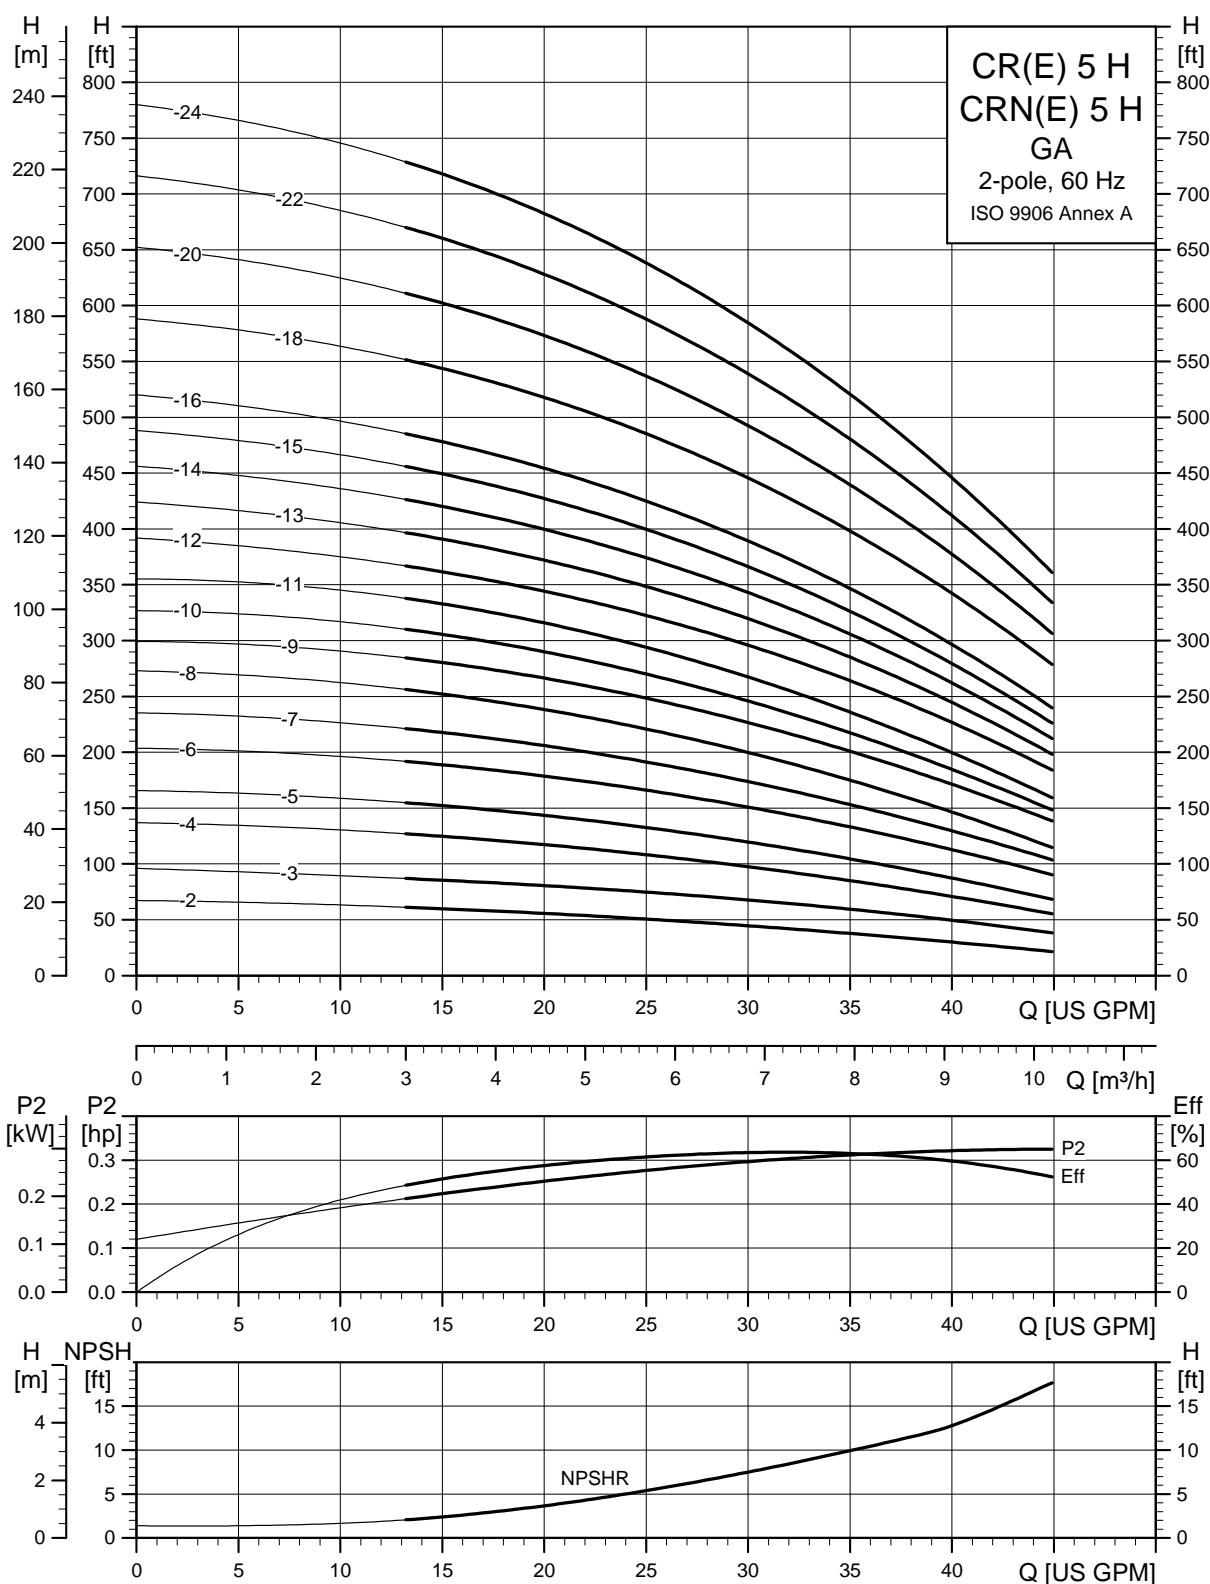

Dimensions and weights GA (1.5" x 1" x 6", 1.5" x 1" x 8")

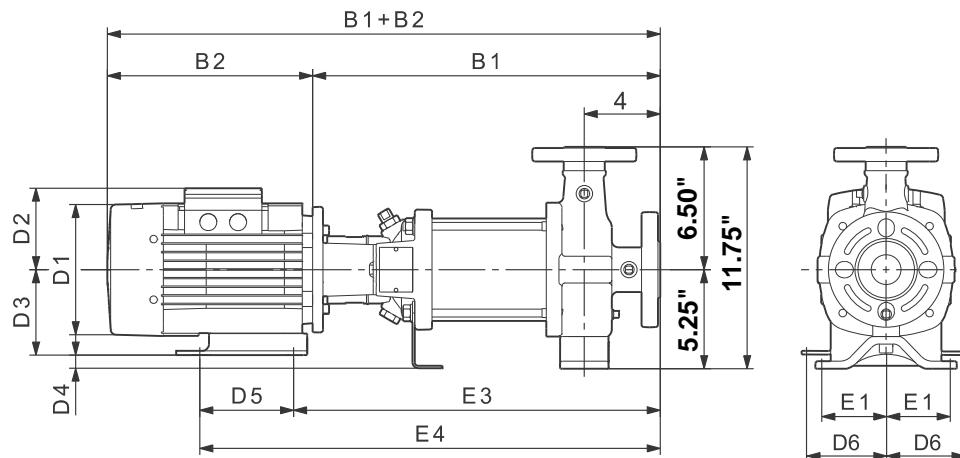


TM06 9699 1014 - TM04 4642 0310

Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] MLE*				Ship. wt. [lbs]	
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	AG	B1+B2		
CR(N)(E) 5-2 H	3/4	1	13.07	23.00	3.00	15.63	18.63	5.19	3.00	3.50	1.75	3.00	6.19	83	4.80	6.22	8.34	21.53	77
		3	13.07	20.69	3.00	15.63	18.63	4.63	3.50	3.50	1.75	3.00	5.57	73	-	-	-	-	-
CR(N)(E) 5-3 H	1	1	14.13	25.32	3.00	16.69	19.69	5.75	3.00	3.50	1.75	3.00	7.19	89	4.80	6.22	8.34	22.59	78
		3	14.13	21.75	3.00	16.69	19.69	4.63	3.50	3.50	1.75	3.00	5.57	74	4.80	6.22	10.56	24.17	85
CR(N)(E) 5-4 H	1 1/2	1	15.19	26.88	3.00	17.75	20.75	5.75	3.00	3.50	1.75	3.00	7.19	104	4.80	6.22	8.34	23.65	82
		3	15.19	24.00	3.00	17.75	20.75	4.63	3.50	3.50	1.75	3.00	5.57	77	4.80	6.22	10.56	25.23	87
CR(N) 5-5 H	2	1	16.25	28.82	3.00	18.82	21.82	5.75	3.00	3.50	1.75	3.00	7.19	108	-	-	-	-	-
		3	16.25	27.63	3.00	18.82	21.82	4.38	3.50	3.50	1.75	3.00	7.07	99	-	-	-	-	-
CR(N)(E) 5-6 H	2	1	17.32	29.88	3.00	19.88	22.88	5.75	3.00	3.50	1.75	3.00	7.19	109	4.80	6.22	8.34	26.57	58
		3	17.32	28.69	3.00	19.88	22.88	4.38	3.50	3.50	1.75	3.00	7.07	100	4.80	6.22	10.56	28.15	92
CR(N) 5-7 H	3	1	19.25	33.94	3.00	22.88	28.38	6.75	4.50	4.50	0.75	5.50	8.63	137	-	-	-	-	-
		3	19.25	32.50	3.00	22.88	28.38	4.32	4.50	4.50	0.75	5.50	7.00	116	-	-	-	-	-
CR(N) 5-8 H	3	1	20.32	35.00	3.00	23.94	29.44	6.75	4.50	4.50	0.75	5.50	8.63	138	-	-	-	-	-
		3	20.32	33.57	3.00	23.94	29.44	4.32	4.50	4.50	0.75	5.50	7.00	117	-	-	-	-	-
CR(N)(E) 5-9 H	3	1	21.38	36.07	3.00	25.00	30.50	6.75	4.50	4.50	0.75	5.50	8.63	139	-	-	-	-	-
		3	21.38	34.63	3.00	25.00	30.50	4.32	4.50	4.50	0.75	5.50	7.00	118	4.80	6.22	10.56	32.21	109
CR(N) 5-10 H	5	1	22.44	38.00	3.00	26.19	31.69	8.07	4.50	5.25	0.00	5.50	10.63	182	-	-	-	-	-
		3	22.44	38.00	3.00	26.19	31.69	5.25	4.50	4.50	0.75	5.50	8.69	165	-	-	-	-	-
CR(N) 5-11 H	5	1	23.50	39.07	3.00	27.25	32.75	8.07	4.50	5.25	0.00	5.50	10.63	183	-	-	-	-	-
		3	23.50	39.07	3.00	27.25	32.75	5.25	4.50	4.50	0.75	5.50	8.69	166	-	-	-	-	-
CR(N) 5-12 H	5	1	24.57	40.13	3.00	28.32	33.82	8.07	4.50	5.25	0.00	5.50	10.63	185	-	-	-	-	-
		3	24.57	40.13	3.00	28.32	33.82	5.25	4.50	4.50	0.75	5.50	8.69	168	-	-	-	-	-
CR(N)(E) 5-13 H	5	1	25.63	41.19	3.00	29.38	34.88	8.07	4.50	5.25	0.00	5.50	10.63	186	-	-	-	-	-
		3	25.63	41.19	3.00	29.38	34.88	5.25	4.50	4.50	0.75	5.50	8.69	169	7.53	7.91	11.46	38.78	143
CR(N) 5-14 H	5	1	26.75	42.25	3.00	30.50	36.00	8.07	4.50	5.25	0.00	5.50	10.63	187	-	-	-	-	-
		3	26.75	42.25	3.00	30.50	36.00	5.25	4.50	4.50	0.75	5.50	8.69	170	-	-	-	-	-
CR(N)(E) 5-15 H	5	1	27.82	43.32	3.00	31.57	37.07	8.07	4.50	5.25	0.00	5.50	10.63	189	-	-	-	-	-
		3	27.82	43.32	3.00	31.57	37.07	5.25	4.50	4.50	0.75	5.50	8.69	171	7.53	7.91	11.46	40.97	146
CR(N)(E) 5-16 H	5	1	28.88	44.38	3.00	32.63	38.13	8.07	4.50	5.25	0.00	5.50	10.63	193	-	-	-	-	-
		3	28.88	44.38	3.00	32.63	38.13	5.25	4.50	4.50	0.75	5.50	8.69	176	7.53	7.91	11.46	42.03	150
CR(N) 5-18 H	7 1/2	1	31.50	47.00	3.00	36.00	43.00	7.63	5.50	5.25	0.00	7.00	10.25	213	-	-	-	-	-
		3	31.50	47.00	3.00	36.00	43.00	5.25	5.25	5.25	0.00	7.00	8.69	192	-	-	-	-	-
CR(N)(E) 5-20 H	7 1/2	1	33.63	49.13	3.00	38.13	45.13	7.63	5.50	5.25	0.00	7.00	10.25	316	-	-	-	-	-
		3	33.63	49.13	3.00	38.13	45.13	5.25	5.25	5.25	0.00	7.00	8.69	296	7.53	7.91	11.46	48.00	286
CR(N) 5-22 H	7 1/2	1	35.75	51.25	3.00	40.25	47.25	7.63	5.50	5.25	0.00	7.00	10.25	319	-	-	-	-	-
		3	35.75	51.25	3.00	40.25	47.25	5.25	5.25	5.25	0.00	7.00	8.69	298	-	-	-	-	-
CR(N)(E) 5-24 H	7 1/2	1	37.88	53.38	3.00	42.38	49.38	7.63	5.50	5.25	0.00	7.00	10.25	321	-	-	-	-	-
		3	37.88	53.38	3.00	42.38	49.38	5.25	5.25	5.25	0.00	7.00	8.69	301	7.53	7.91	11.46	42.72	152

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

CR, CRE, CRN, CRNE 10 H G22

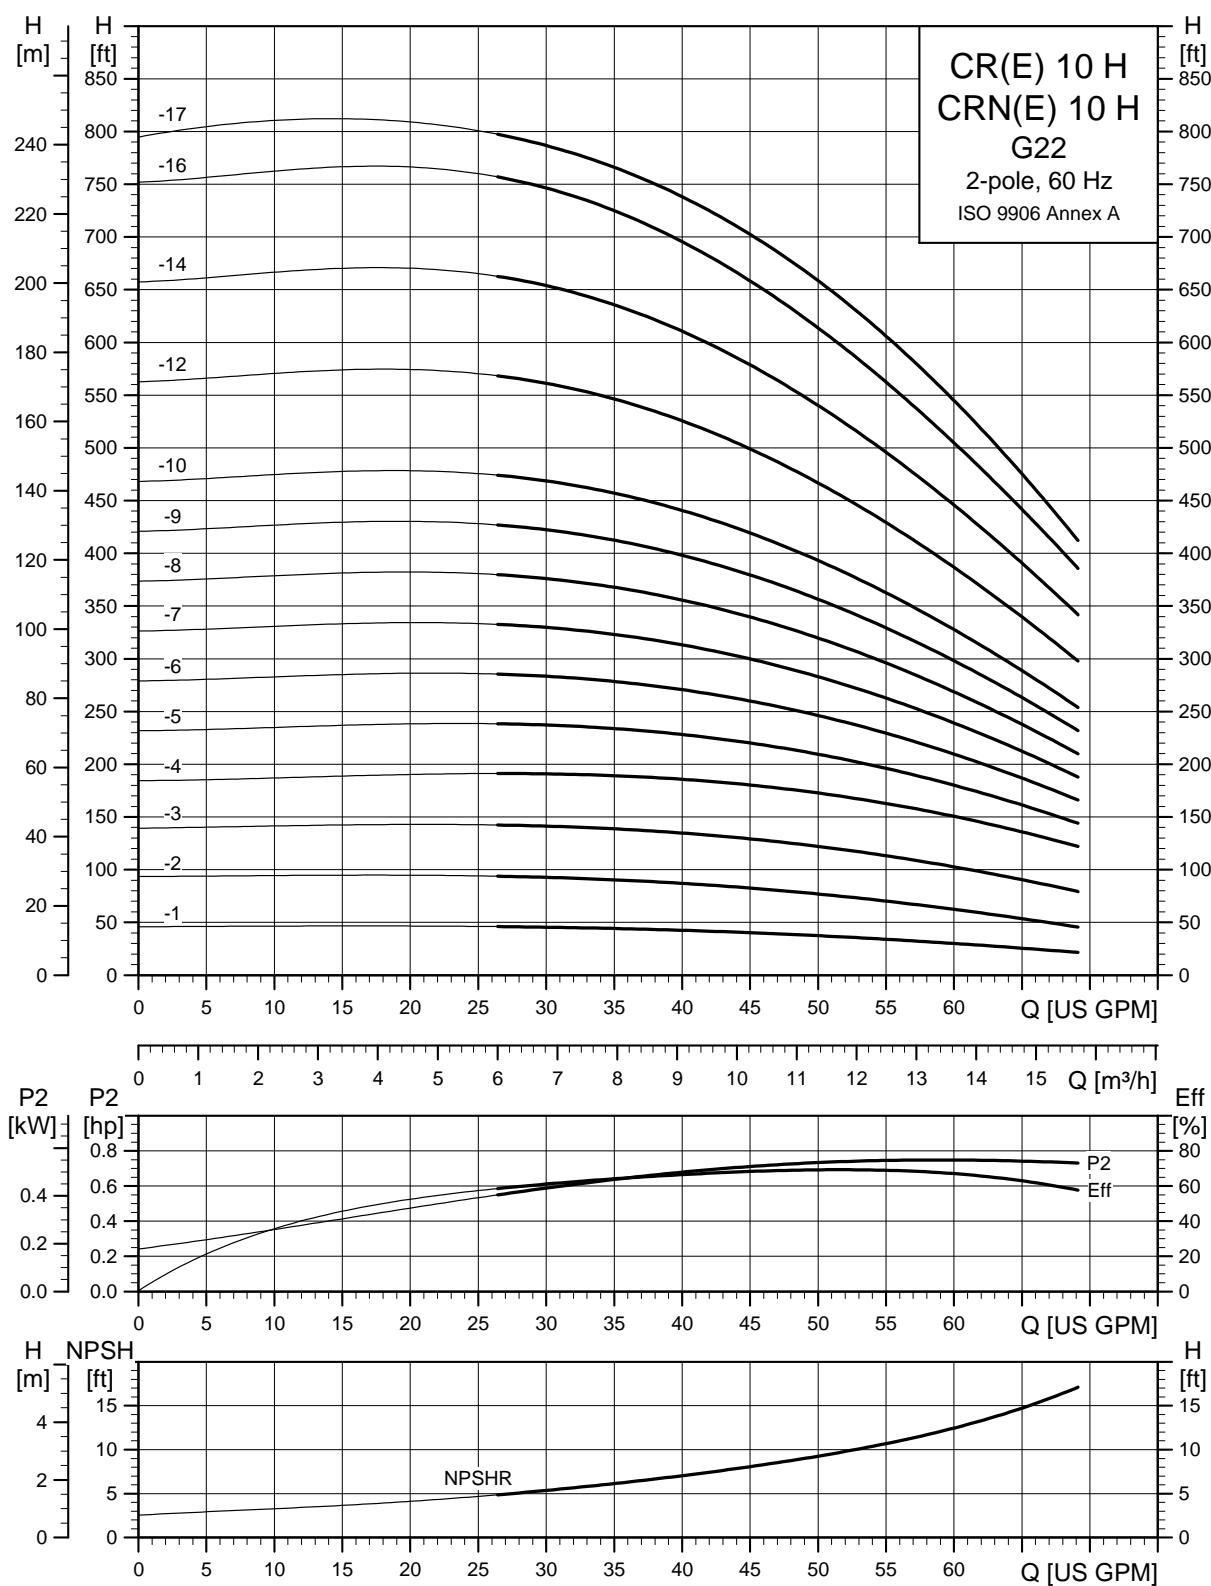

TMO42850912

Dimensions and weights G22 (2" x 2")

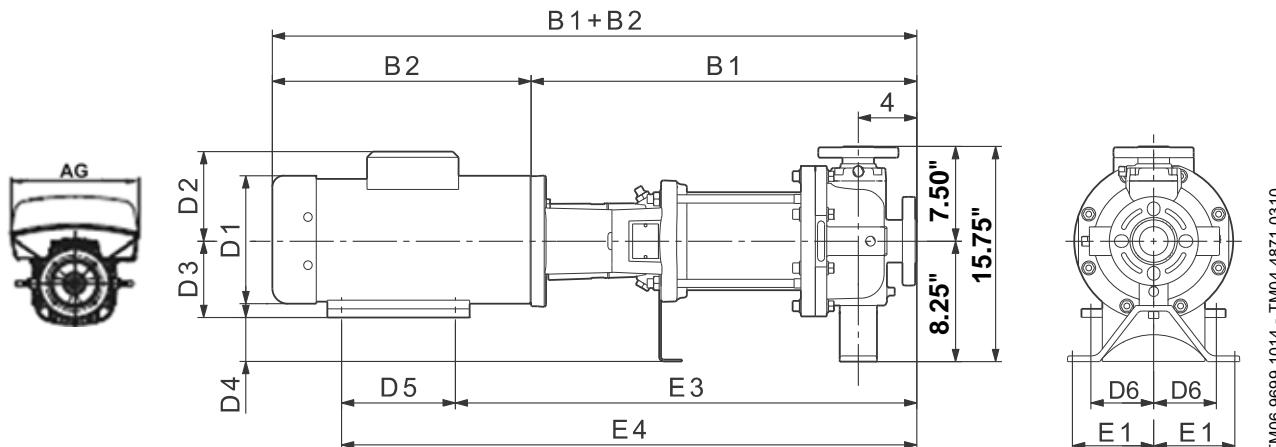

Pump type	HP	PH	Dimensions [in] TEFC								Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]			
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	B1+B2	D1	D2	AG	B1+B2		
CR(N)(E) 10-1 H	1	1	16.88	26.82	4.88	19.44	22.44	6.19	5.19	3.50	4.75	3.00	2.44	246	-	-	-	4.80	6.22	8.34	25.34	240
		3	16.88	24.50	4.88	19.44	22.44	5.57	4.63	3.50	4.75	3.00	2.44	236	-	-	-	4.80	6.22	10.56	26.92	244
CR(N)(E) 10-2 H	2	1	16.88	28.57	4.88	19.44	22.44	7.19	5.75	3.50	4.75	3.00	2.44	264	-	-	-	4.80	6.22	8.34	26.13	246
	1 1/2	3	16.88	25.69	4.88	19.44	22.44	5.57	4.63	3.50	4.75	3.00	2.44	237	-	-	-	4.80	6.22	10.56	26.92	246
CR(N) 10-3 H	3	1	20.50	35.13	4.88	24.13	28.63	8.63	6.75	4.50	3.75	4.50	3.75	308	-	-	-	-	-	-	-	-
		3	20.50	33.69	4.88	24.13	28.63	7.00	4.32	4.50	3.75	4.50	3.75	287	-	-	-	-	-	-	-	-
CR(N)(E) 10-4 H	3	1	21.69	36.32	4.88	25.32	29.82	7.00	4.32	4.50	3.75	4.50	3.75	310	-	-	-	-	-	-	-	-
		3	21.69	34.88	4.88	25.32	29.82	8.63	6.75	4.50	3.75	4.50	3.75	289	-	-	-	4.80	6.22	10.56	32.52	279
CR(N) 10-5 H	5	1	22.88	38.38	4.88	26.63	31.13	10.63	8.07	5.25	3.00	4.50	3.75	348	-	-	-	-	-	-	-	-
		3	22.88	38.38	4.88	26.63	31.13	8.69	5.25	4.50	3.75	4.50	3.75	331	-	-	-	-	-	-	-	-
CR(N)(E) 10-6 H	5	1	24.07	39.57	4.88	27.82	32.32	10.63	8.07	5.25	3.00	4.50	3.75	350	-	-	-	-	-	-	-	-
		3	24.07	39.57	4.88	27.82	32.32	8.69	5.25	4.50	3.75	4.50	3.75	333	-	-	-	7.53	7.91	11.46	37.22	307
CR(N) 10-7 H	5	1	25.19	40.75	4.88	28.94	33.44	10.63	8.07	5.25	3.00	4.50	3.75	357	-	-	-	-	-	-	-	-
		3	25.19	40.75	4.88	28.94	33.44	8.69	5.25	4.50	3.75	4.50	3.75	340	-	-	-	-	-	-	-	-
CR(N)(E) 10-8 H	7 1/2	1	26.88	42.44	4.88	31.38	36.88	10.25	7.63	5.25	3.00	5.50	4.25	371	-	-	-	-	-	-	-	-
		3	26.88	42.44	4.88	31.38	36.88	8.69	5.25	5.25	3.00	5.50	4.25	351	-	-	-	7.53	7.91	11.46	41.25	341
CR(N) 10-9 H	7 1/2	1	28.07	43.63	4.88	32.57	38.07	10.25	7.63	5.25	3.00	5.50	4.25	373	-	-	-	-	-	-	-	-
		3	28.07	43.63	4.88	32.57	38.07	8.69	5.25	5.25	3.00	5.50	4.25	353	-	-	-	-	-	-	-	-
CR(N)(E) 10-10 H	7 1/2	1	29.25	44.82	4.88	33.75	39.25	10.25	7.63	5.25	3.00	5.50	4.25	376	-	-	-	-	-	-	-	-
		3	29.25	44.75	4.88	33.75	39.25	8.69	5.25	5.25	3.00	5.50	4.25	355	-	-	-	7.53	7.91	11.46	43.62	346
CR(N)(E) 10-12 H	10	1	31.63	47.69	4.88	36.13	43.13	10.25	10.32	5.25	3.00	7.00	4.25	455	-	-	-	-	-	-	-	-
		3	31.63	46.82	4.88	36.13	43.13	10.25	6.25	5.25	3.00	7.00	4.25	403	-	-	-	10.04	9.33	13.62	46.94	372
CR(N)(E) 10-14 H	15	3	34.69	53.19	4.88	39.69	47.94	12.38	8.00	6.25	2.00	8.25	5.00	488	10.63	8.00	52.88	10.04	9.33	13.62	50.67	442
CR(N) 10-16 H	15	3	37.07	55.57	4.88	42.07	50.32	12.38	8.00	6.25	2.00	8.25	5.00	494	10.63	8.00	55.19	-	-	-	-	-
CR(N)(E) 10-17 H	15	3	39.38	57.94	4.88	44.38	52.63	12.38	8.00	6.25	2.00	8.25	5.00	499	10.63	8.00	57.57	10.04	9.33	13.62	55.36	453


Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

1) CR(N)E 10-1 dimensions are for 1 HP motor.


2) CR(N)(E) 10-2 with single phase motor uses a 2 HP MLE motor.

CR, CRE, CRN, CRNE 10 H GA/G05

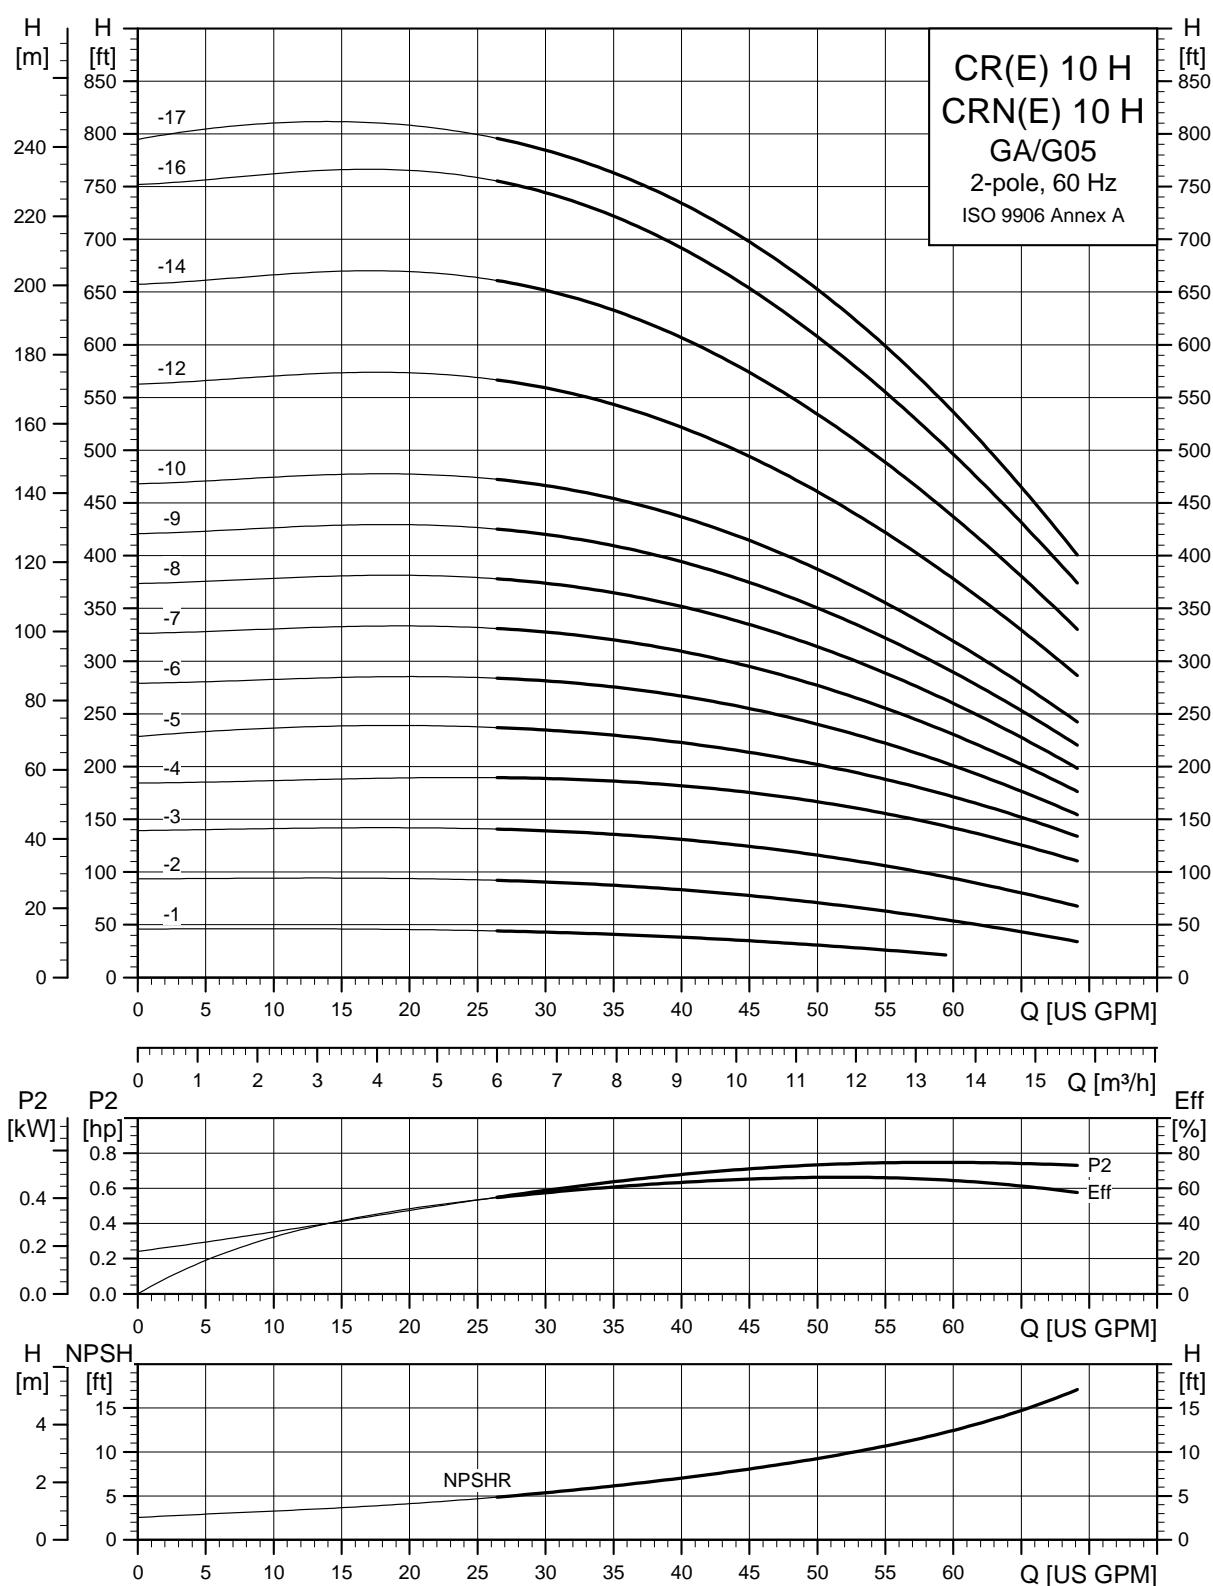

TNU4 6264 0912

Dimensions and weights GA (1.5" x 1" x 6", 1.5" x 1" x 8")

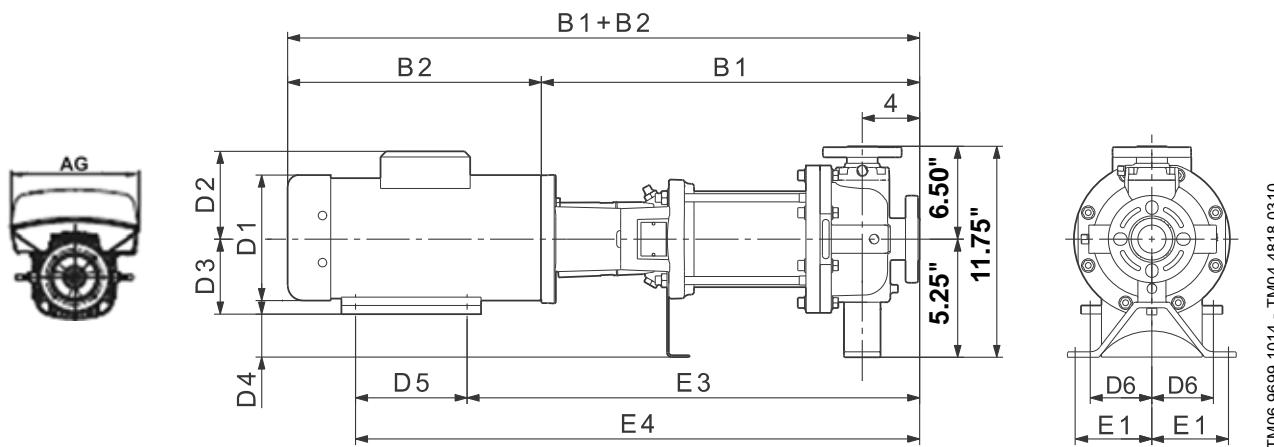

Pump type	HP	PH	Dimensions [in] TEFC									Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	B1+B2	D1	D2	AG	B1+B2		
CR(N)(E) 10-1 H	1	1	16.88	26.82	3.00	19.44	22.44	6.19	5.19	3.50	1.75	3.00	2.44	145	-	-	4.80	6.22	8.34	25.34	139	
		3	16.88	24.50	3.00	19.44	22.44	5.57	4.63	3.50	1.75	3.00	2.44	135	-	-	4.80	6.22	10.56	26.92	143	
CR(N)(E) 10-2 H	2	1	16.88	28.57	3.00	19.44	22.44	7.19	5.75	3.50	1.75	3.00	2.44	163	-	-	4.80	6.22	8.34	26.13	144	
	1 1/2	3	16.88	25.69	3.00	19.44	22.44	5.57	4.63	3.50	1.75	3.00	2.44	136	-	-	4.80	6.22	10.56	26.92	145	
CR(N) 10-3 H	3	1	20.50	35.13	3.00	24.13	28.63	8.63	6.75	4.50	0.75	4.50	3.75	207	-	-	-	-	-	-	-	
	3	20.50	33.69	3.00	24.13	28.63	7.00	4.32	4.50	0.75	4.50	3.75	186	-	-	-	-	-	-	-		
CR(N)(E) 10-4 H	3	1	21.69	36.32	3.00	25.32	29.82	8.63	6.75	4.50	0.75	4.50	3.75	209	-	-	-	-	-	-	-	
	3	21.69	34.88	3.00	25.32	29.82	7.00	4.32	4.50	0.75	4.50	3.75	188	-	-	4.80	6.22	10.56	32.52	178		
CR(N) 10-5 H	5	1	22.88	38.38	3.00	26.63	31.13	10.63	8.07	5.25	0.00	4.50	3.75	254	-	-	-	-	-	-	-	
	3	22.88	38.38	3.00	26.63	31.13	8.69	5.25	4.50	0.75	4.50	3.75	236	-	-	-	-	-	-	-		
CR(N)(E) 10-6 H	5	1	24.07	39.57	3.00	27.82	32.32	10.63	8.07	5.25	0.00	4.50	3.75	256	-	-	-	-	-	-	-	
	3	24.07	39.57	3.00	27.82	32.32	8.69	5.25	4.50	0.75	4.50	3.75	239	-	-	7.53	7.91	11.46	37.22	212		
CR(N) 10-7 H	5	1	25.19	40.75	3.00	28.94	33.44	10.63	8.07	5.25	0.00	4.50	3.75	260	-	-	-	-	-	-	-	
	3	25.19	40.75	3.00	28.94	33.44	8.69	5.25	4.50	0.75	4.50	3.75	243	-	-	-	-	-	-	-		
CR(N)(E) 10-8 H	7 1/2	1	26.88	42.44	3.00	31.38	36.88	10.25	7.63	5.25	0.00	5.50	4.25	274	-	-	-	-	-	-	-	
	3	26.88	42.44	3.00	31.38	36.88	8.69	5.25	5.25	0.00	5.50	4.25	254	-	-	7.53	7.91	11.46	41.25	244		
CR(N) 10-9 H	7 1/2	1	28.07	43.63	3.00	32.57	38.07	10.25	7.63	5.25	0.00	5.50	4.25	277	-	-	-	-	-	-	-	
	3	28.07	43.63	3.00	32.57	38.07	8.69	5.25	5.25	0.00	5.50	4.25	256	-	-	-	-	-	-	-		
CR(N)(E) 10-10 H	7 1/2	1	29.25	44.82	3.00	33.75	39.25	10.25	7.63	5.25	0.00	5.50	4.25	279	-	-	-	-	-	-	-	
	3	29.25	44.82	3.00	33.75	39.25	8.69	5.25	5.25	0.00	5.50	4.25	258	-	-	7.53	7.91	11.46	43.62	249		
CR(N)(E) 10-12 H	10	1	31.63	47.69	3.00	36.13	43.13	10.25	10.32	5.25	0.00	7.00	4.25	444	-	-	-	-	-	-	-	
	3	31.63	46.82	3.00	36.13	43.13	10.25	6.25	5.25	0.00	7.00	4.25	392	-	-	10.04	9.33	13.62	46.94	361		
CR(N)(E) 10-14 H	15	3	34.69	53.19	3.00	39.69	47.94	12.38	8.00	6.25	-1.00	8.25	5.00	479	10.63	8.00	52.88	10.04	9.33	13.62	50.67	434
CR(N)(E) 10-16 H	15	3	37.07	55.57	3.00	42.07	50.32	12.38	8.00	6.25	-1.00	8.25	5.00	483	10.63	8.00	55.19	-	-	-	-	-
CR(N)(E) 10-17 H	15	3	39.38	57.94	3.00	44.38	52.63	12.38	8.00	6.25	-1.00	8.25	5.00	488	10.63	8.00	57.57	10.04	9.33	13.62	55.36	442


Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

1) CR(N)E 10-1 dimensions are for 1 HP motor.

2) CR(N)(E) 10-2 with single phase motor uses a 2 HP MLE motor.

Dimensions and weights G05 (2" x 1" x 10")

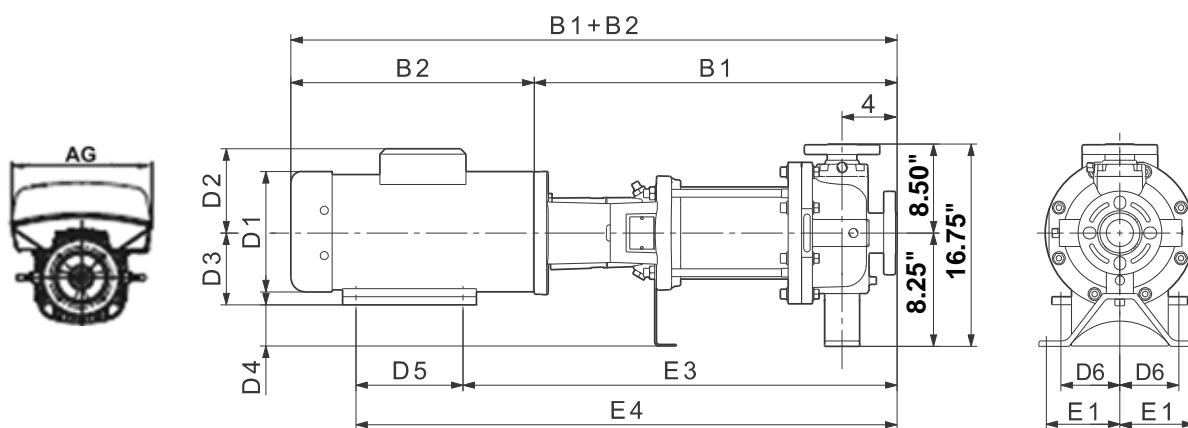

TM06 96699 1014 - TM04 4643 0310


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]		
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	B1+B2	D1	D2	AG	B1+B2		
CR(N)(E) 10-1 H	1	1	16.88	26.82	4.88	19.44	22.44	6.19	5.19	3.50	4.75	3.00	2.44	305	-	-	-	4.80	6.22	8.34	25.34	299
		3	16.88	24.50	4.88	19.44	22.44	5.57	4.63	3.50	4.75	3.00	2.44	295	-	-	-	4.80	6.22	10.56	26.92	304
CR(N)(E) 10-2 H	2	1	16.88	28.57	4.88	19.44	22.44	7.19	5.75	3.50	4.75	3.00	2.44	323	-	-	-	4.80	6.22	8.34	26.13	305
		1 1/2	3	16.88	25.69	4.88	19.44	22.44	5.57	4.63	3.50	4.75	3.00	2.44	296	-	-	-	4.80	6.22	10.56	26.92
CR(N) 10-3 H	3	1	20.50	35.13	4.88	24.13	28.63	8.63	6.75	4.50	3.75	4.50	3.75	369	-	-	-	-	-	-	-	-
		3	20.50	33.69	4.88	24.13	28.63	7.00	4.32	4.50	3.75	4.50	3.75	349	-	-	-	-	-	-	-	-
CR(N)(E) 10-4 H	3	1	21.69	36.32	4.88	25.32	29.82	8.63	6.75	4.50	3.75	4.50	3.75	369	-	-	-	-	-	-	-	-
		3	21.69	34.88	4.88	25.32	29.82	7.00	4.32	4.50	3.75	4.50	3.75	349	-	-	-	4.80	6.22	10.56	32.52	339
CR(N) 10-5 H	5	1	22.88	38.38	4.88	26.63	31.13	10.63	8.07	5.25	4.50	3.75	4.50	410	-	-	-	-	-	-	-	-
		3	22.88	38.38	4.88	26.63	31.13	8.69	5.25	4.50	3.75	4.50	3.75	393	-	-	-	-	-	-	-	-
CR(N)(E) 10-6 H	5	1	24.07	39.57	4.88	27.82	32.32	10.63	8.07	5.25	3.00	4.50	3.75	410	-	-	-	-	-	-	-	-
		3	24.07	39.57	4.88	27.82	32.32	8.69	5.25	4.50	3.75	4.50	3.75	393	-	-	-	7.53	7.91	11.46	37.22	336
CR(N) 10-7 H	5	1	25.19	40.75	4.88	28.94	33.44	10.63	8.07	5.25	3.00	4.50	3.75	416	-	-	-	-	-	-	-	-
		3	25.19	40.75	4.88	28.94	33.44	8.69	5.25	4.50	3.75	4.50	3.75	399	-	-	-	-	-	-	-	-
CR(N)(E) 10-8 H	7 1/2	1	26.88	42.44	4.88	31.38	36.88	10.25	7.63	5.25	3.00	5.50	4.25	431	-	-	-	-	-	-	-	-
		3	26.88	42.44	4.88	31.38	36.88	8.69	5.25	5.25	3.00	5.50	4.25	410	-	-	-	7.53	7.91	11.46	41.25	401
CR(N) 10-9 H	7 1/2	1	28.07	43.63	4.88	32.57	38.07	10.25	7.63	5.25	3.00	5.50	4.25	433	-	-	-	-	-	-	-	-
		3	28.07	43.63	4.88	32.57	38.07	8.69	5.25	5.25	3.00	5.50	4.25	412	-	-	-	-	-	-	-	-
CR(N)(E) 10-10 H	7 1/2	1	29.25	44.82	4.88	33.75	39.25	10.25	7.63	5.25	3.00	5.50	4.25	435	-	-	-	-	-	-	-	-
		3	29.25	44.75	4.88	33.75	39.25	8.69	5.25	5.25	3.00	5.50	4.25	415	-	-	-	7.53	7.91	11.46	43.62	405
CR(N)(E) 10-12 H	10	1	31.63	47.69	4.88	36.13	43.13	10.25	10.32	5.25	3.00	7.00	4.25	499	-	-	-	-	-	-	-	-
		3	31.63	46.82	4.88	36.13	43.13	10.25	6.25	5.25	3.00	7.00	4.25	447	-	-	-	10.04	9.33	13.62	46.94	416
CR(N)(E) 10-14 H	15	3	34.69	53.19	4.88	39.69	47.94	12.38	8.00	6.25	2.00	8.25	5.00	532	10.63	8.00	52.88	10.04	9.33	13.62	50.67	486
CR(N) 10-16 H	15	3	37.07	55.57	4.88	42.07	50.32	12.38	8.00	6.25	2.00	8.25	5.00	536	10.63	8.00	55.19	-	-	-	-	-
CR(N)(E) 10-17 H	15	3	39.38	57.94	4.88	44.38	52.63	12.38	8.00	6.25	2.00	8.25	5.00	540	10.63	8.00	57.57	10.04	9.33	13.62	55.36	495

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.


1) CR(N)E 10-1 dimensions are for 1 HP motor.

2) CR(N)(E) 10-2 with single phase motor uses a 2 HP MLE motor.

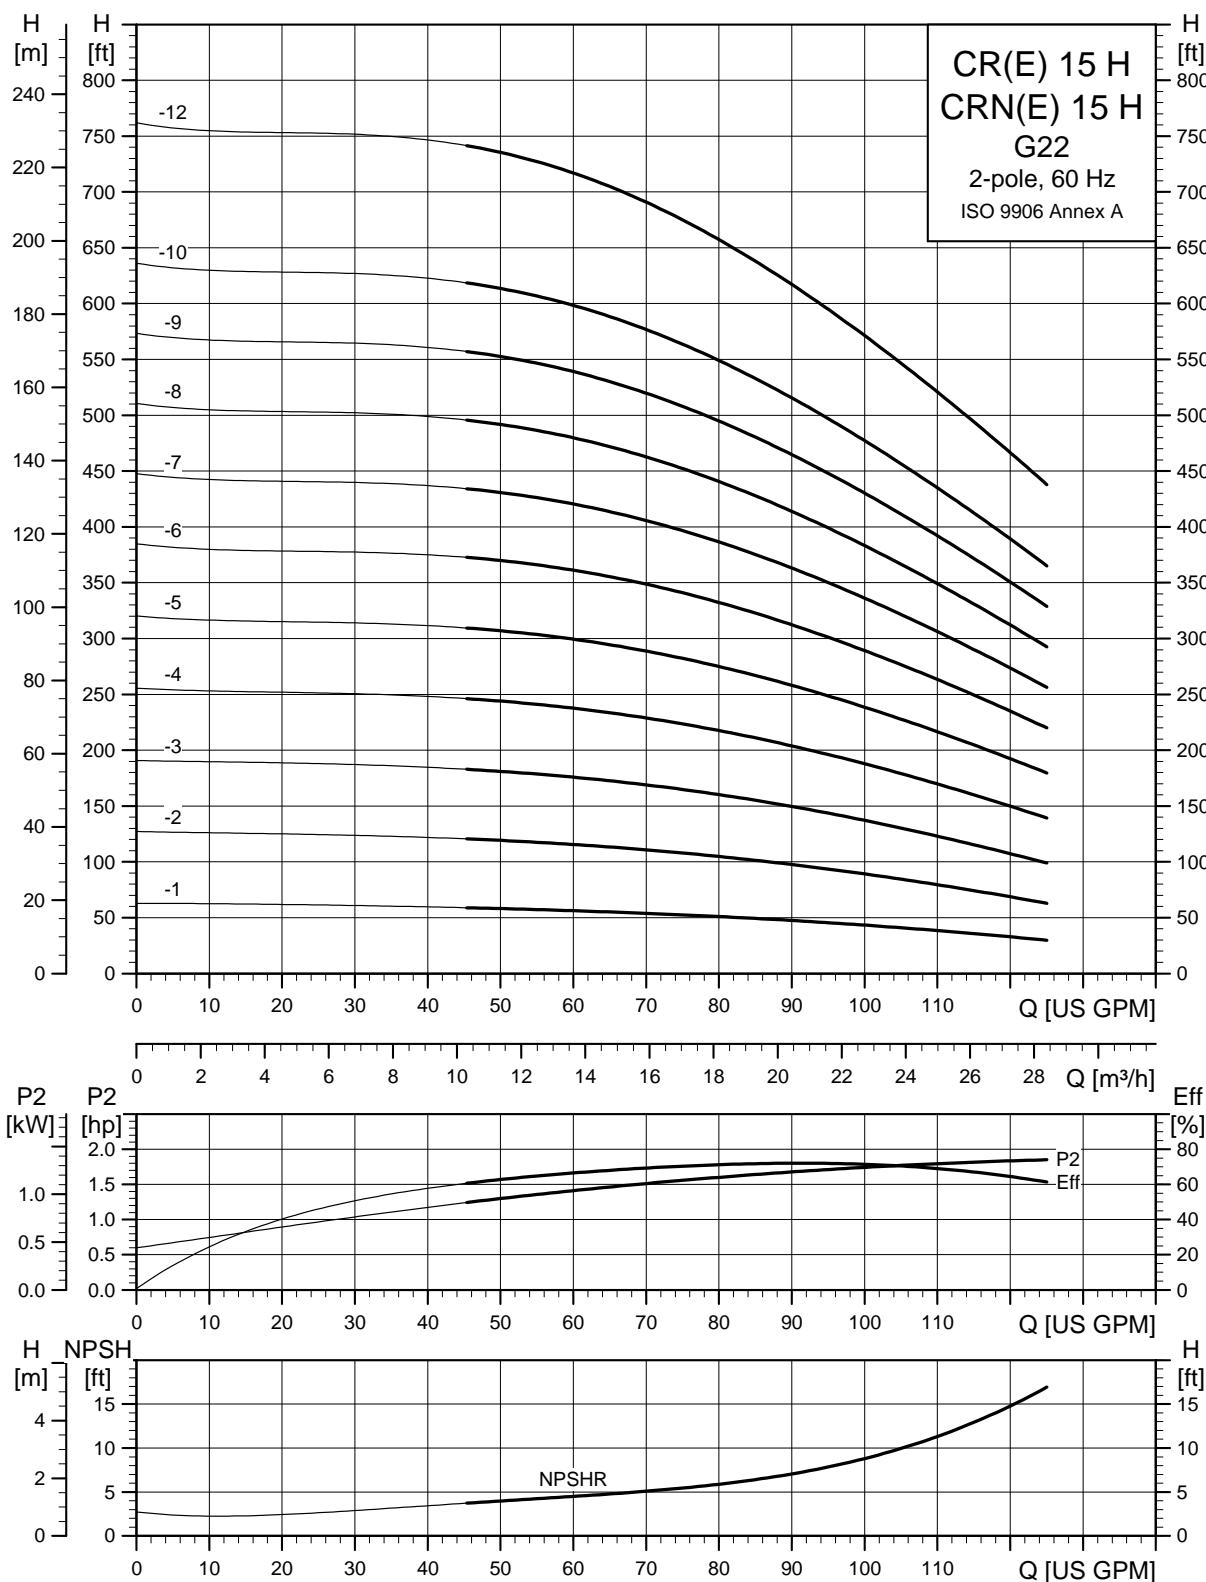CR, CRE, CRN, CRNE 15 H G22

TM04 6288 0912

Dimensions and weights G22 (2" x 2")

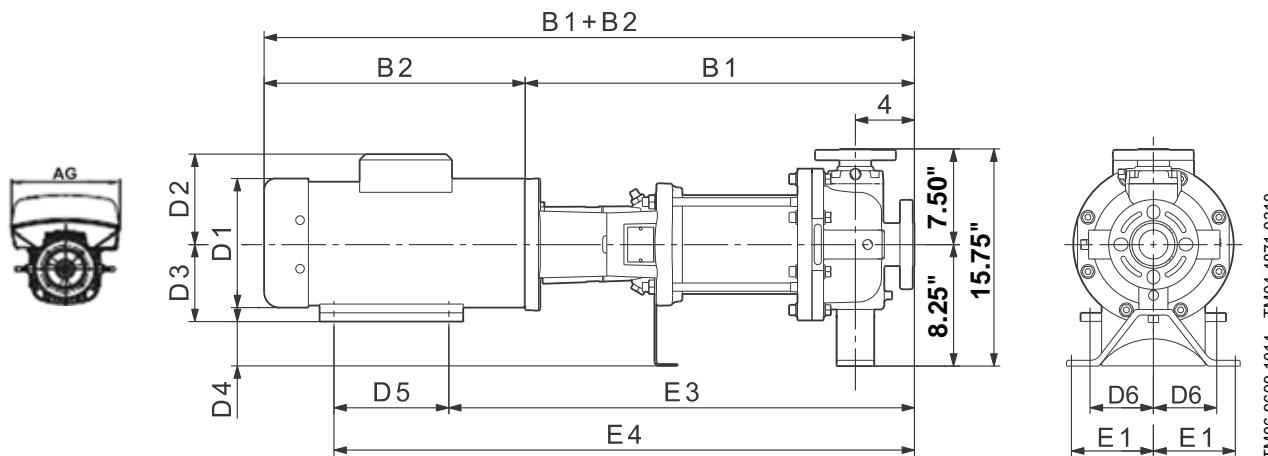


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]	
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	B1+B2	D1	D2	AG	B1+B2		
CR(N)(E) 15-1 H	2	1	18.13	30.63	4.88	20.63	23.63	7.25	5.75	3.50	4.75	3.00	2.50	269	-	-	-	4.80	6.22	8.34	27.38	248
		3	18.13	29.50	4.88	20.63	23.63	7.13	4.38	3.50	4.75	3.00	2.50	260	-	-	-	4.80	6.22	10.56	28.96	252
CR(N)(E) 15-2 H	5	1	20.50	36.00	4.88	24.25	28.75	10.63	8.00	5.25	3.00	4.50	3.75	344	-	-	-	-	-	-	-	-
		3	20.50	36.00	4.88	24.25	28.75	8.63	5.25	4.50	3.75	4.50	3.75	327	-	-	-	7.53	7.91	11.46	33.65	300
CR(N)(E) 15-3 H	7 1/2	1	22.75	38.25	4.88	27.25	32.75	10.25	7.63	5.25	3.00	5.50	4.25	362	-	-	-	-	-	-	-	-
		3	22.75	38.25	4.88	27.25	32.75	8.63	5.25	5.25	3.00	5.50	4.25	342	-	-	-	7.53	7.91	11.46	37.12	332
CR(N)(E) 15-4 H	7 1/2	1	24.50	40.13	4.88	29.00	34.50	10.25	7.63	5.25	3.00	5.50	4.25	365	-	-	-	-	-	-	-	-
		3	24.50	40.00	4.88	29.00	34.50	8.63	5.25	5.25	3.00	5.50	4.25	344	-	-	-	7.53	7.91	11.46	38.87	335
CR(N)(E) 15-5 H	10	1	26.38	42.38	4.88	30.88	37.88	10.25	10.25	5.25	3.00	7.00	4.25	424	-	-	-	-	-	-	-	-
		3	26.38	41.50	4.88	30.88	37.88	10.25	6.25	5.25	3.00	7.00	4.25	372	-	-	-	10.04	9.33	13.62	41.69	341
CR(N)(E) 15-6 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	6.25	2.00	8.25	5.00	455	10.63	8.00	47.00	10.04	9.33	13.62	44.73	409
CR(N) 15-7 H	15	3	30.50	49.13	4.88	35.50	43.75	12.38	8.00	6.25	2.00	8.25	5.00	479	10.63	8.00	48.75	-	-	-	-	-
CR(N)(E) 15-8 H	15	3	32.25	50.88	4.88	37.25	45.50	12.38	8.00	6.25	2.00	8.25	5.00	481	10.63	8.00	50.50	10.04	9.33	13.62	48.23	436
CR(N)(E) 15-9 H	20	3	34.13	52.63	4.88	39.13	49.10	12.38	8.00	6.25	2.00	10.00	5.00	488	10.63	8.00	52.25	13.39	12.13	16.54	52.91	588
CR(N)(E) 15-10 H	20	3	35.88	54.38	4.88	40.88	50.88	12.38	8.00	6.25	2.00	10.00	5.00	484	11.50	9.00	53.75	13.39	12.13	16.54	54.66	595
CR(N)(E) 15-12 H	25	3	38.63	61.00	4.88	43.63	53.13	12.38	8.00	7.00	1.25	9.50	5.50	520	11.50	11.38	57.63	13.39	12.13	16.54	61.35	632

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

CR, CRE, CRN, CRNE 15 H GA/G05

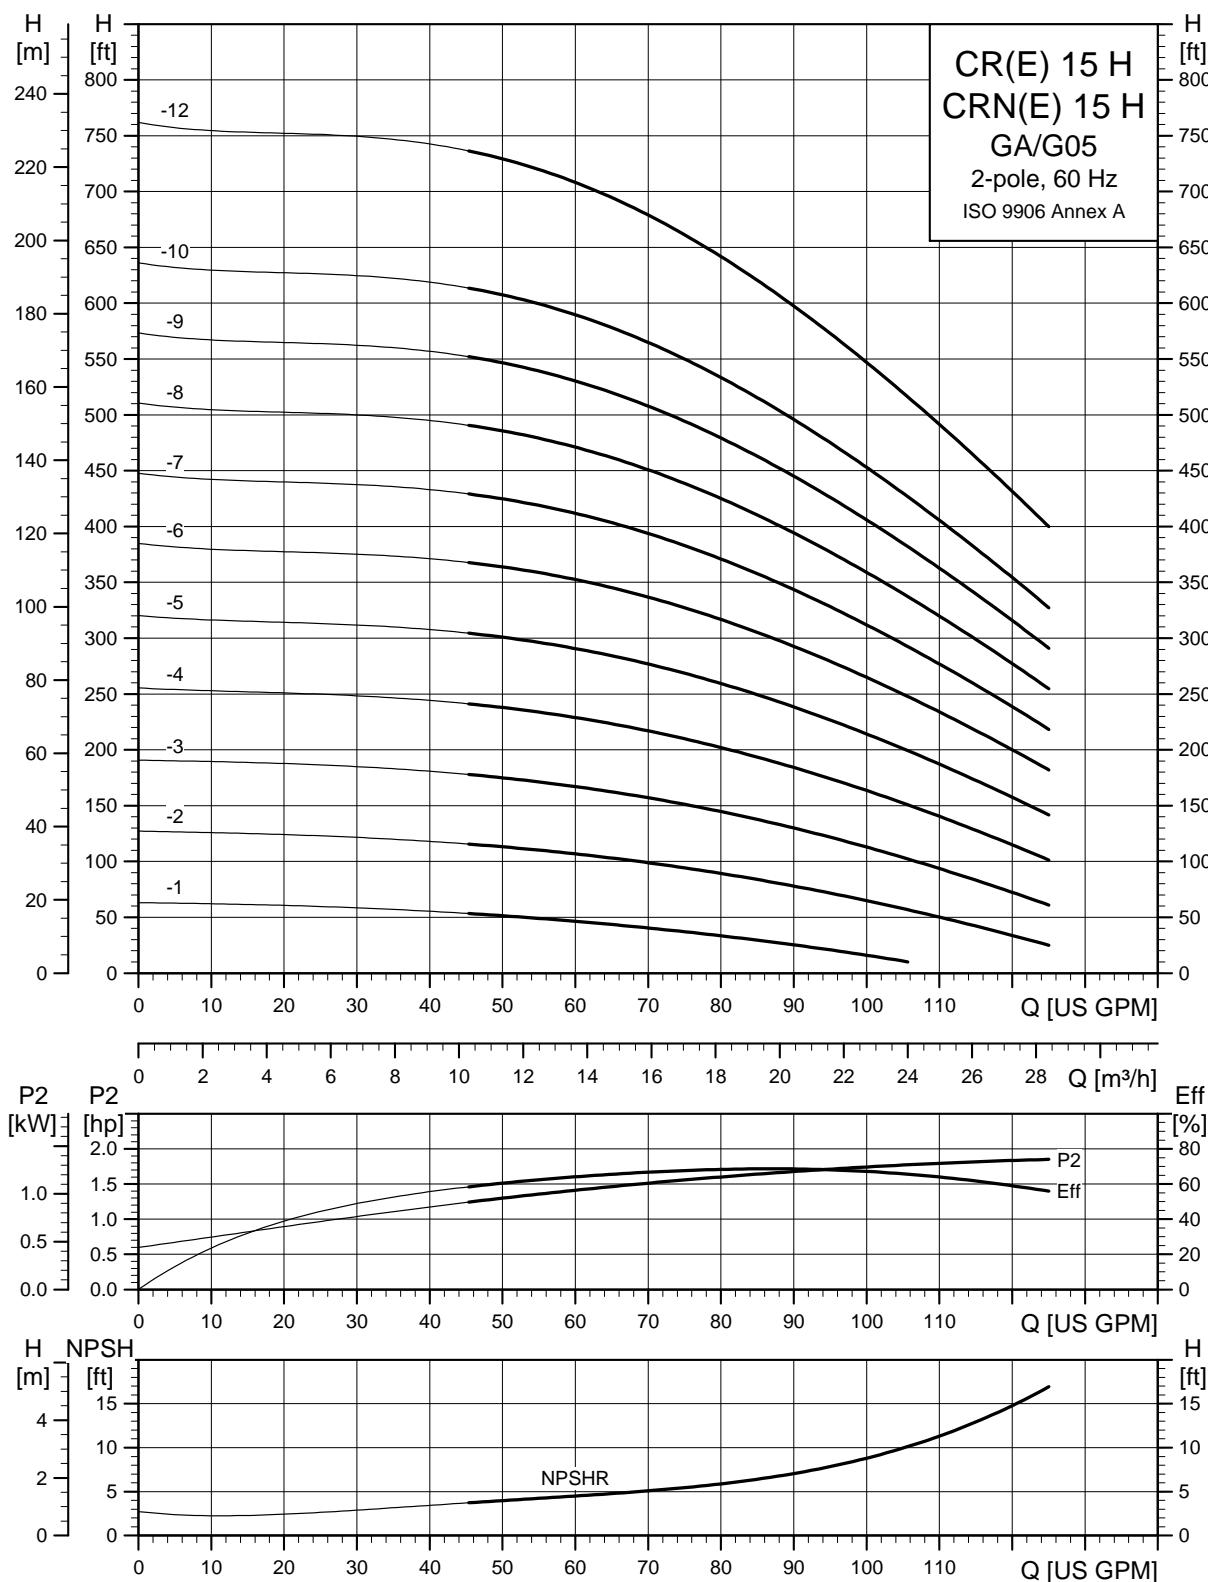

TM04-6286 0912

Dimensions and weights GA (1.5" x 1" x 6", 1.5" x 1" x 8")

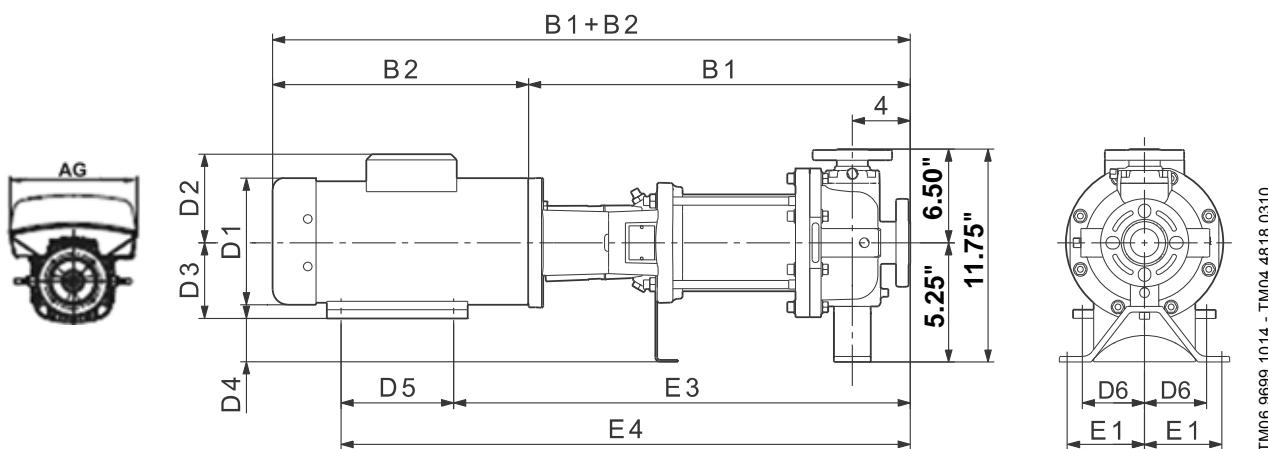


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]	
			B1	B1+ B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2		
CR(N)(E) 15-1 H	2	1	18.13	30.63	3.00	20.63	23.63	7.25	5.75	3.50	1.75	3.00	2.50	166	-	-	-	4.80	6.22	8.34	27.38	145
		3	18.13	29.50	3.00	20.63	23.63	7.13	4.38	3.50	1.75	3.00	2.50	157	-	-	-	4.80	6.22	10.56	28.96	149
CR(N)(E) 15-2 H	5	1	20.50	36.00	3.00	24.25	28.75	10.63	8.00	5.25	0.00	4.50	3.75	243	-	-	-	-	-	-	-	-
		3	20.50	36.00	3.00	24.25	28.75	8.63	5.25	4.50	0.75	4.50	3.75	225	-	-	-	7.53	7.91	11.46	33.65	199
CR(N)(E) 15-3 H	7 1/2	1	22.75	38.25	3.00	27.25	32.75	10.25	7.63	5.25	0.00	5.50	4.25	266	-	-	-	-	-	-	-	-
		3	22.75	38.25	3.00	27.25	32.75	8.63	5.25	5.25	0.00	5.50	4.25	245	-	-	-	7.53	7.91	11.46	37.12	236
CR(N)(E) 15-4 H	7 1/2	1	24.50	40.13	3.00	29.00	34.50	10.25	7.63	5.25	0.00	5.50	4.25	270	-	-	-	-	-	-	-	-
		3	24.50	40.00	3.00	29.00	34.50	8.63	5.25	5.25	0.00	5.50	4.25	250	-	-	-	7.53	7.91	11.46	38.87	240
CR(N)(E) 15-5 H	10	1	26.38	42.38	3.00	30.88	37.88	10.25	10.25	5.25	0.00	7.00	4.25	327	-	-	-	-	-	-	-	-
		3	26.38	41.50	3.00	30.88	37.88	10.25	6.25	5.25	0.00	7.00	4.25	275	-	-	-	10.04	9.33	13.62	41.69	244
CR(N)(E) 15-6 H	15	3	28.75	47.25	3.00	33.75	42.00	12.38	8.00	6.25	-1.00	8.25	5.00	360	10.63	8.00	47.00	10.04	9.33	13.62	44.73	315
CR(N) 15-7 H	15	3	30.50	49.13	3.00	35.50	43.75	12.38	8.00	6.25	-1.00	8.25	5.00	367	10.63	8.00	48.75	-	-	-	-	-
CR(N)(E) 15-8 H	15	3	32.25	50.88	3.00	37.25	45.50	12.38	8.00	6.25	-1.00	8.25	5.00	470	10.63	8.00	50.50	10.04	9.33	13.62	48.23	425
CR(N)(E) 15-9 H	20	3	34.13	52.63	3.00	39.13	49.10	12.38	8.00	6.25	-1.00	10.00	5.00	477	10.63	8.00	52.25	13.39	12.13	16.54	52.91	577
CR(N)(E) 15-10 H	20	3	35.88	54.38	3.00	40.88	50.88	12.38	8.00	6.25	-1.00	10.00	5.00	476	11.50	9.00	53.75	13.39	12.13	16.54	54.66	586
CR(N)(E) 15-12 H	25	3	38.63	61.00	3.00	43.63	53.13	12.38	8.00	7.00	-1.75	9.50	5.50	509	11.50	11.38	57.63	13.39	12.13	16.54	61.35	621

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

Dimensions and weights G05 (2" x 1" x 10")

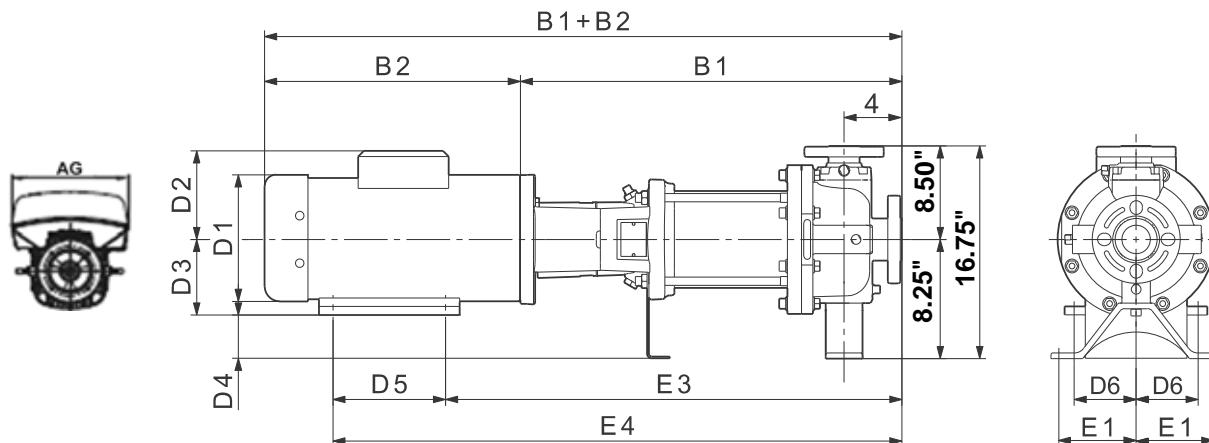


TM06 9699 1014 - TM04 4643 0310

Pump type	HP	PH	Dimensions [in] TEFC									Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	B1+B2	D1	D2	AG	B1+B2		
CR(N)(E) 15-1 H	2	1	18.13	30.63	4.88	20.63	23.63	7.25	5.75	3.50	4.75	3.00	2.50	329	-	-	-	4.80	6.22	8.34	27.38	308
		3	18.13	29.50	4.88	20.63	23.63	7.13	4.38	3.50	4.75	3.00	2.50	320	-	-	-	4.80	6.22	10.56	28.96	312
CR(N)(E) 15-2 H	5	1	20.50	36.00	4.88	24.25	28.75	10.63	8.00	5.25	3.00	4.50	3.75	403	-	-	-	-	-	-	-	-
		3	20.50	36.00	4.88	24.25	28.75	8.63	5.25	4.50	3.75	4.50	3.75	386	-	-	-	7.53	7.91	11.46	33.65	359
CR(N)(E) 15-3 H	7 1/2	1	22.75	38.25	4.88	27.25	32.75	10.25	7.63	5.25	3.00	5.50	4.25	422	-	-	-	-	-	-	-	-
		3	22.75	38.25	4.88	27.25	32.75	8.63	5.25	5.25	3.00	5.50	4.25	401	-	-	-	7.53	7.91	11.46	37.12	392
CR(N)(E) 15-4 H	7 1/2	1	24.50	40.13	4.88	29.00	34.50	10.25	7.63	5.25	3.00	5.50	4.25	426	-	-	-	-	-	-	-	-
		3	24.50	40.00	4.88	29.00	34.50	8.63	5.25	5.25	3.00	5.50	4.25	406	-	-	-	7.53	7.91	11.46	38.87	396
CR(N)(E) 15-5 H	10	1	26.38	42.38	4.88	30.88	37.88	10.25	10.25	5.25	3.00	7.00	4.25	483	-	-	-	-	-	-	-	-
		3	26.38	41.50	4.88	30.88	37.88	10.25	6.25	5.25	3.00	7.00	4.25	431	-	-	-	10.04	9.33	13.62	41.69	401
CR(N)(E) 15-6 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	6.25	2.00	8.25	5.00	516	10.63	8.00	47.00	10.04	9.33	13.62	44.73	471
CR(N) 15-7 H	15	3	30.50	49.13	4.88	35.50	43.75	12.38	8.00	6.25	2.00	8.25	5.00	518	10.63	8.00	48.75	-	-	-	-	-
CR(N)(E) 15-8 H	15	3	32.25	50.88	4.88	37.25	45.50	12.38	8.00	6.25	2.00	8.25	5.00	529	10.63	8.00	50.50	10.04	9.33	13.62	48.23	484
CR(N)(E) 15-9 H	20	3	34.13	52.63	4.88	39.13	49.10	12.38	8.00	6.25	2.00	10.00	5.00	529	10.63	8.00	52.25	13.39	12.13	16.54	52.91	630
CR(N)(E) 15-10 H	20	3	35.88	54.38	4.88	40.88	50.88	12.38	8.00	6.25	2.00	10.00	5.00	528	11.50	9.00	53.75	13.39	12.13	16.54	54.66	639
CR(N)(E) 15-12 H	25	3	38.63	61.00	4.88	43.63	53.13	12.38	8.00	7.00	1.25	9.50	5.50	561	11.50	11.38	57.63	13.39	12.13	16.54	61.35	674


Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

CR, CRE, CRN, CRNE 15 H GB

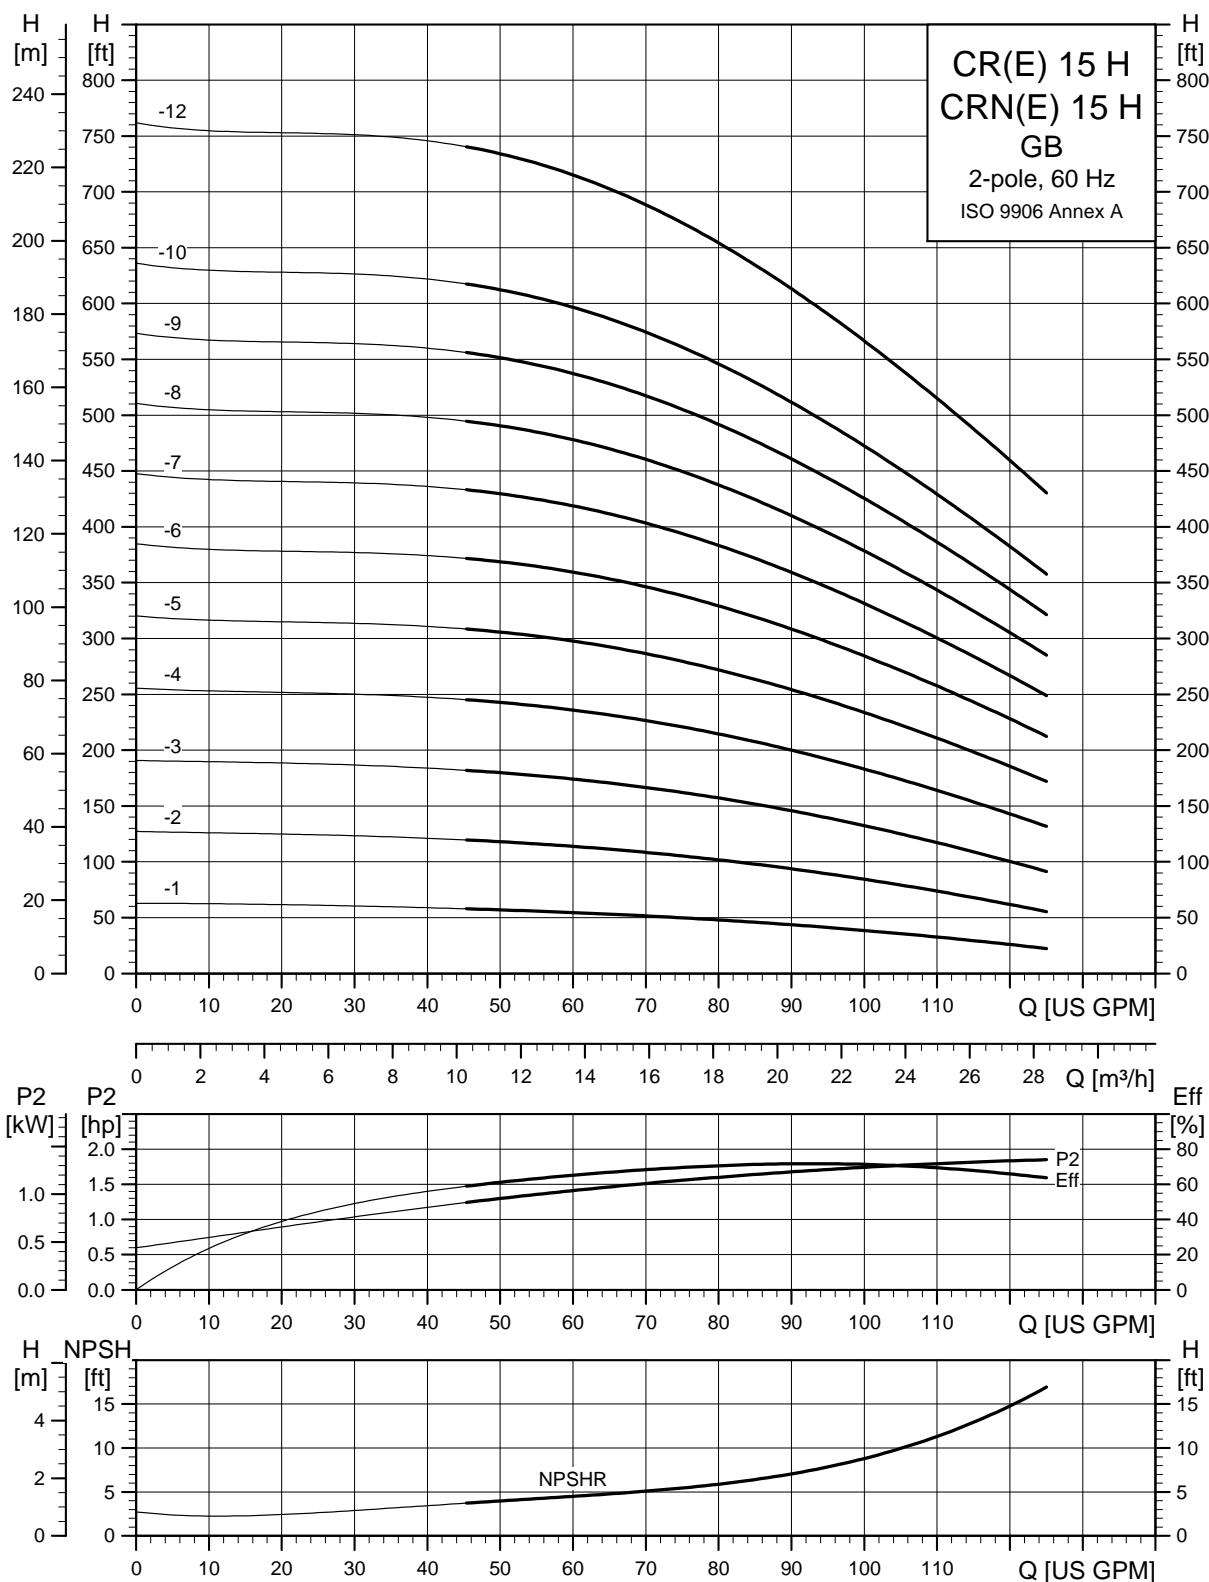

Dimensions and weights GB (3" x 1.5" x 6", 3" x 1.5" x 8")

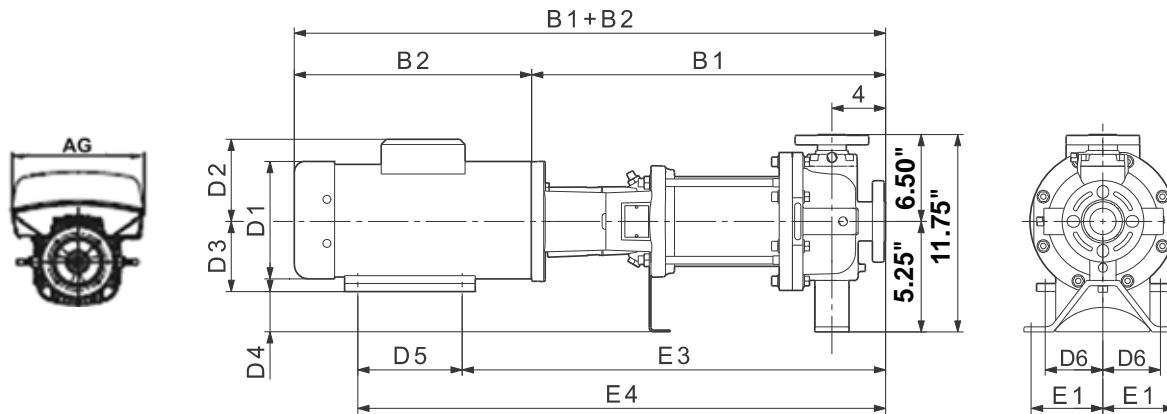


TM06 9699 1014 - TM04 4818 0310

Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]		
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	B1+B2	D1	D2	AG	B1+B2		
CR(N)(E) 15-1 H	2	1	19.13	31.63	3.00	21.63	24.63	7.25	5.75	3.50	1.75	3.00	2.50	172	-	-	-	4.80	6.22	8.34	28.38	151
		3	19.13	30.50	3.00	21.63	24.63	7.13	4.38	3.50	1.75	3.00	2.50	163	-	-	-	4.80	6.22	10.56	29.96	155
CR(N)(E) 15-2 H	5	1	21.50	37.00	3.00	25.25	29.75	10.63	8.00	5.25	0.00	4.50	3.75	247	-	-	-	-	-	-	-	-
		3	21.50	37.00	3.00	25.25	29.75	8.63	5.25	4.50	0.75	4.50	3.75	230	-	-	-	7.53	7.91	11.46	34.65	203
CR(N)(E) 15-3 H	7 1/2	1	23.75	39.38	3.00	28.25	33.75	10.25	7.63	5.25	0.00	5.50	4.25	272	-	-	-	-	-	-	-	-
		3	23.75	39.25	3.00	28.25	33.75	8.63	5.25	5.25	0.00	5.50	4.25	252	-	-	-	7.53	7.91	11.46	38.12	242
CR(N)(E) 15-4 H	7 1/2	1	25.63	41.13	3.00	30.13	35.63	10.25	7.63	5.25	0.00	5.50	4.25	274	-	-	-	-	-	-	-	-
		3	25.63	41.13	3.00	30.13	35.63	8.63	5.25	5.25	0.00	5.50	4.25	254	-	-	-	7.53	7.91	11.46	40.00	244
CR(N)(E) 15-5 H	10	1	27.38	43.38	3.00	31.88	38.88	10.25	10.25	5.25	0.00	7.00	4.25	334	-	-	-	-	-	-	-	-
		3	27.38	42.50	3.00	31.88	38.88	10.25	6.25	5.25	0.00	7.00	4.25	282	-	-	-	10.04	9.33	13.62	42.69	251
CR(N)(E) 15-6 H	15	3	29.75	48.38	3.00	34.75	43.00	12.38	8.00	6.25	-1.00	8.25	5.00	367	10.63	8.00	48.00	10.04	9.33	13.62	45.73	321
CR(N) 15-7 H	15	3	31.50	50.13	3.00	36.50	44.75	12.38	8.00	6.25	-1.00	8.25	5.00	468	10.63	8.00	49.75	-	-	-	-	-
CR(N)(E) 15-8 H	15	3	33.38	51.88	3.00	38.38	46.63	12.38	8.00	6.25	-1.00	8.25	5.00	477	10.63	8.00	51.50	10.04	9.33	13.62	49.36	431
CR(N)(E) 15-9 H	20	3	35.13	53.63	3.00	40.13	50.10	12.38	8.00	6.25	-1.00	10.00	5.00	483	10.63	8.00	53.25	13.39	12.13	16.54	53.91	584
CR(N)(E) 15-10 H	20	3	36.88	55.38	3.00	41.88	51.88	12.38	8.00	6.25	-1.00	10.00	5.00	482	11.50	9.00	54.88	13.39	12.13	16.54	55.66	592
CR(N)(E) 15-12 H	25	3	39.63	62.00	3.00	44.63	54.13	12.38	8.00	7.00	-1.75	9.50	5.50	513	11.50	11.38	58.63	13.39	12.13	16.54	62.35	626

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

CR, CRE, CRN, CRNE 20 H G22

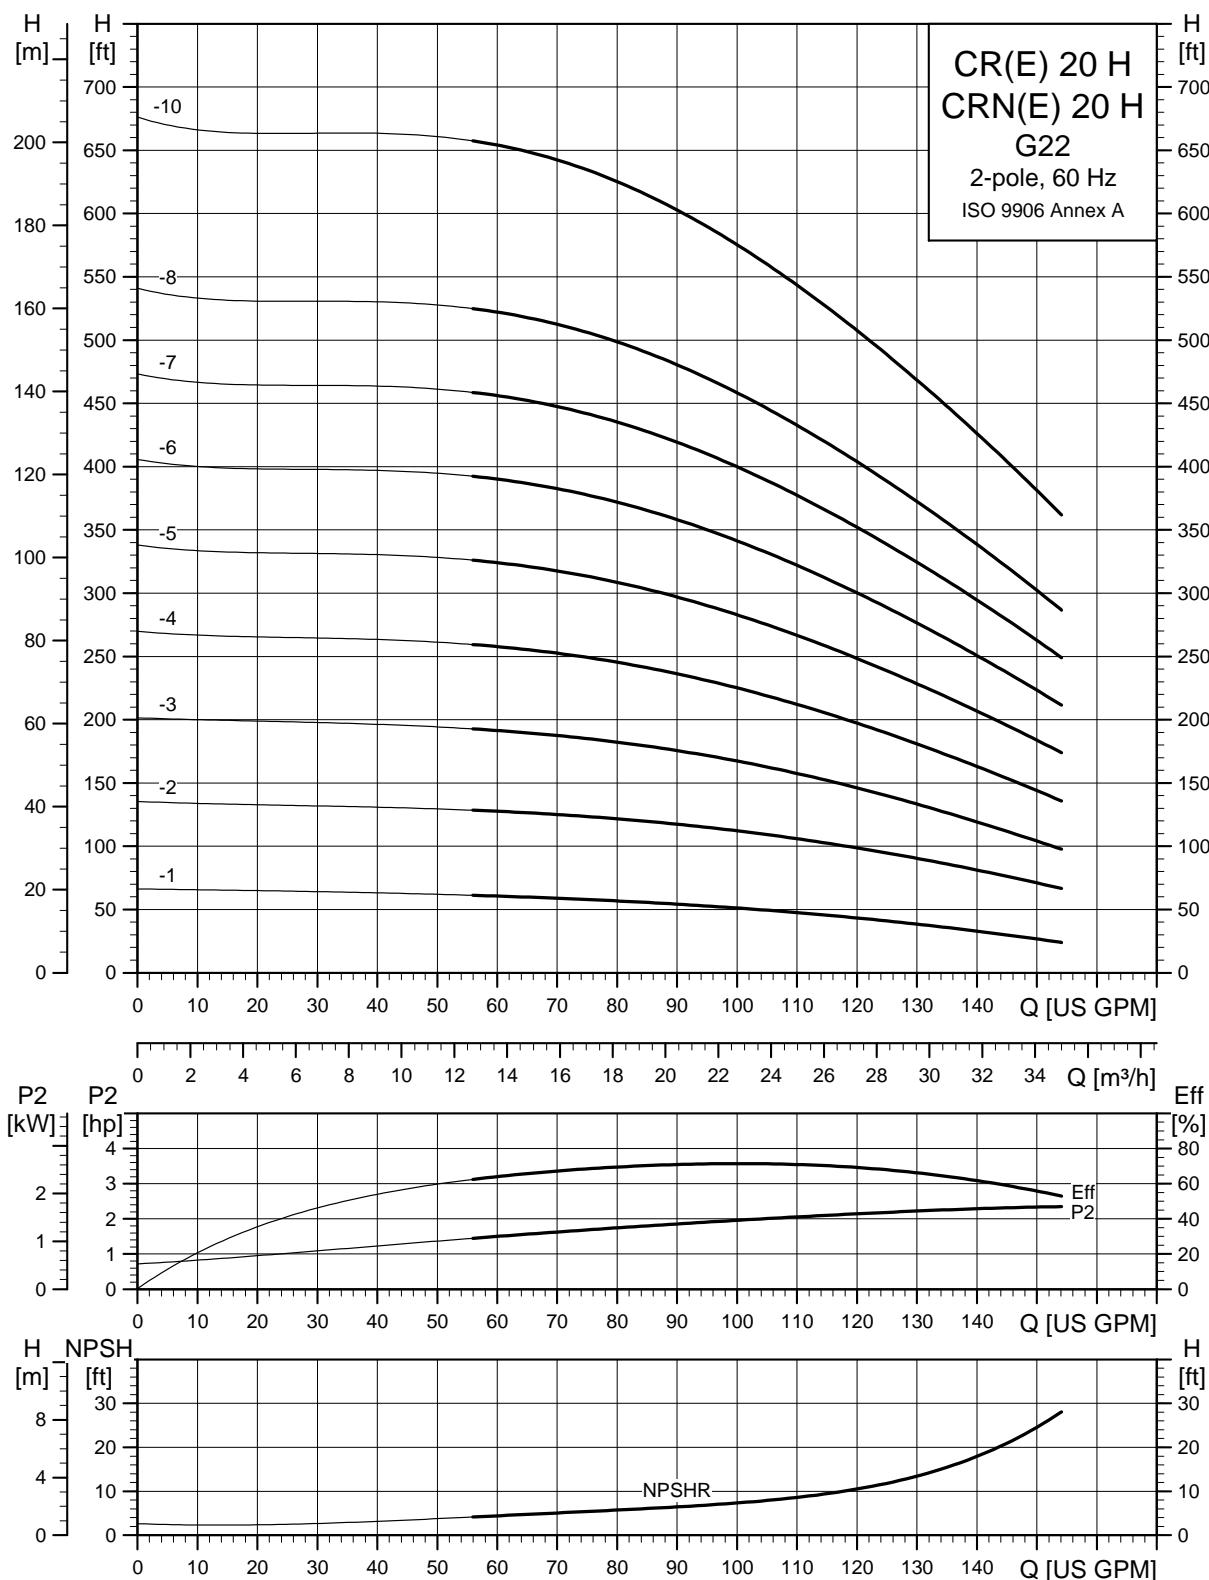

TMO46291.0912

Dimensions and weights G22 (2" x 2")

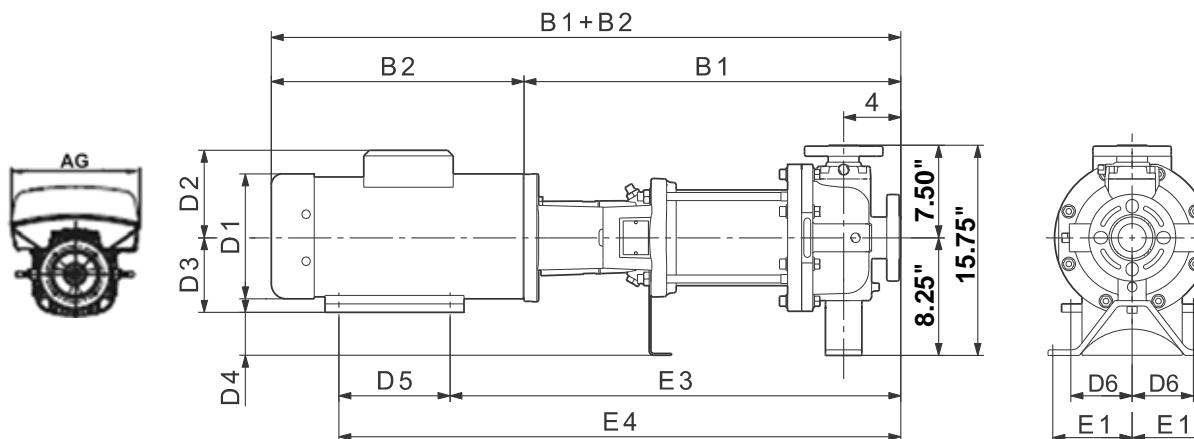


TM06 96699 1014 - TM04 4871 0310

Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]	
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	B1+B2	D1	D2	AG	B1+B2		
CR(N)(E) 20-1 H	3	1	20.50	35.13	4.88	24.13	28.63	8.63	6.75	4.50	3.75	4.50	3.75	308	-	-	-	-	-	-	-	-
		3	20.50	33.75	4.88	24.13	28.63	7.00	4.38	4.50	3.75	4.50	3.75	155	-	-	-	4.80	6.22	10.56	31.33	151
CR(N)(E) 20-2 H	5	1	20.50	36.00	4.88	24.25	28.75	10.63	8.00	5.25	3.00	4.50	3.75	206	-	-	-	-	-	-	-	-
		3	20.50	36.00	4.88	24.25	28.75	8.63	5.25	4.50	3.75	4.50	3.75	175	-	-	-	7.53	7.91	11.46	33.65	300
CR(N)(E) 20-3 H 7 1/2	1	22.75	38.25	4.88	27.25	32.75	10.25	7.63	5.25	3.00	5.50	4.25	227	-	-	-	-	-	-	-	-	
		3	22.75	38.25	4.88	27.25	32.75	8.63	5.25	5.25	3.00	5.50	4.25	199	-	-	-	7.53	7.91	11.46	37.12	332
CR(N)(E) 20-4 H	10	1	24.50	40.63	4.88	29.00	36.00	10.25	10.25	5.25	3.00	7.00	4.25	355	-	-	-	-	-	-	-	-
		3	24.50	39.75	4.88	29.00	36.00	10.25	6.25	5.25	3.00	7.00	4.25	232	-	-	-	10.04	9.33	13.62	39.81	337
CR(N) 20-5 H	15	3	27.00	45.50	4.88	32.00	40.25	12.38	8.00	6.25	2.00	8.25	5.00	371	10.63	8.00	45.13	10.04	9.33	13.62	42.98	407
CR(N) 20-6 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	6.25	2.00	8.25	5.00	375	10.63	8.00	47.00	10.04	9.33	13.62	44.73	409
CR(N) 20-7 H	20	3	30.50	49.13	4.88	35.50	45.50	12.38	8.00	6.25	2.00	10.00	5.00	393	11.50	9.00	48.50	13.39	12.13	16.54	49.28	584
CR(N) 20-8 H	20	3	32.25	50.88	4.88	37.25	47.25	12.38	8.00	6.25	2.00	10.00	5.00	402	11.50	9.00	50.25	13.39	12.13	16.54	51.03	588
CR(N) 20-10 H	25	3	35.00	57.38	4.88	40.00	49.50	12.38	8.00	7.00	1.25	9.50	5.50	490	11.50	11.38	54.13	13.39	12.13	16.54	57.72	626

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

CR, CRE, CRN, CRNE 20 H GA/G05

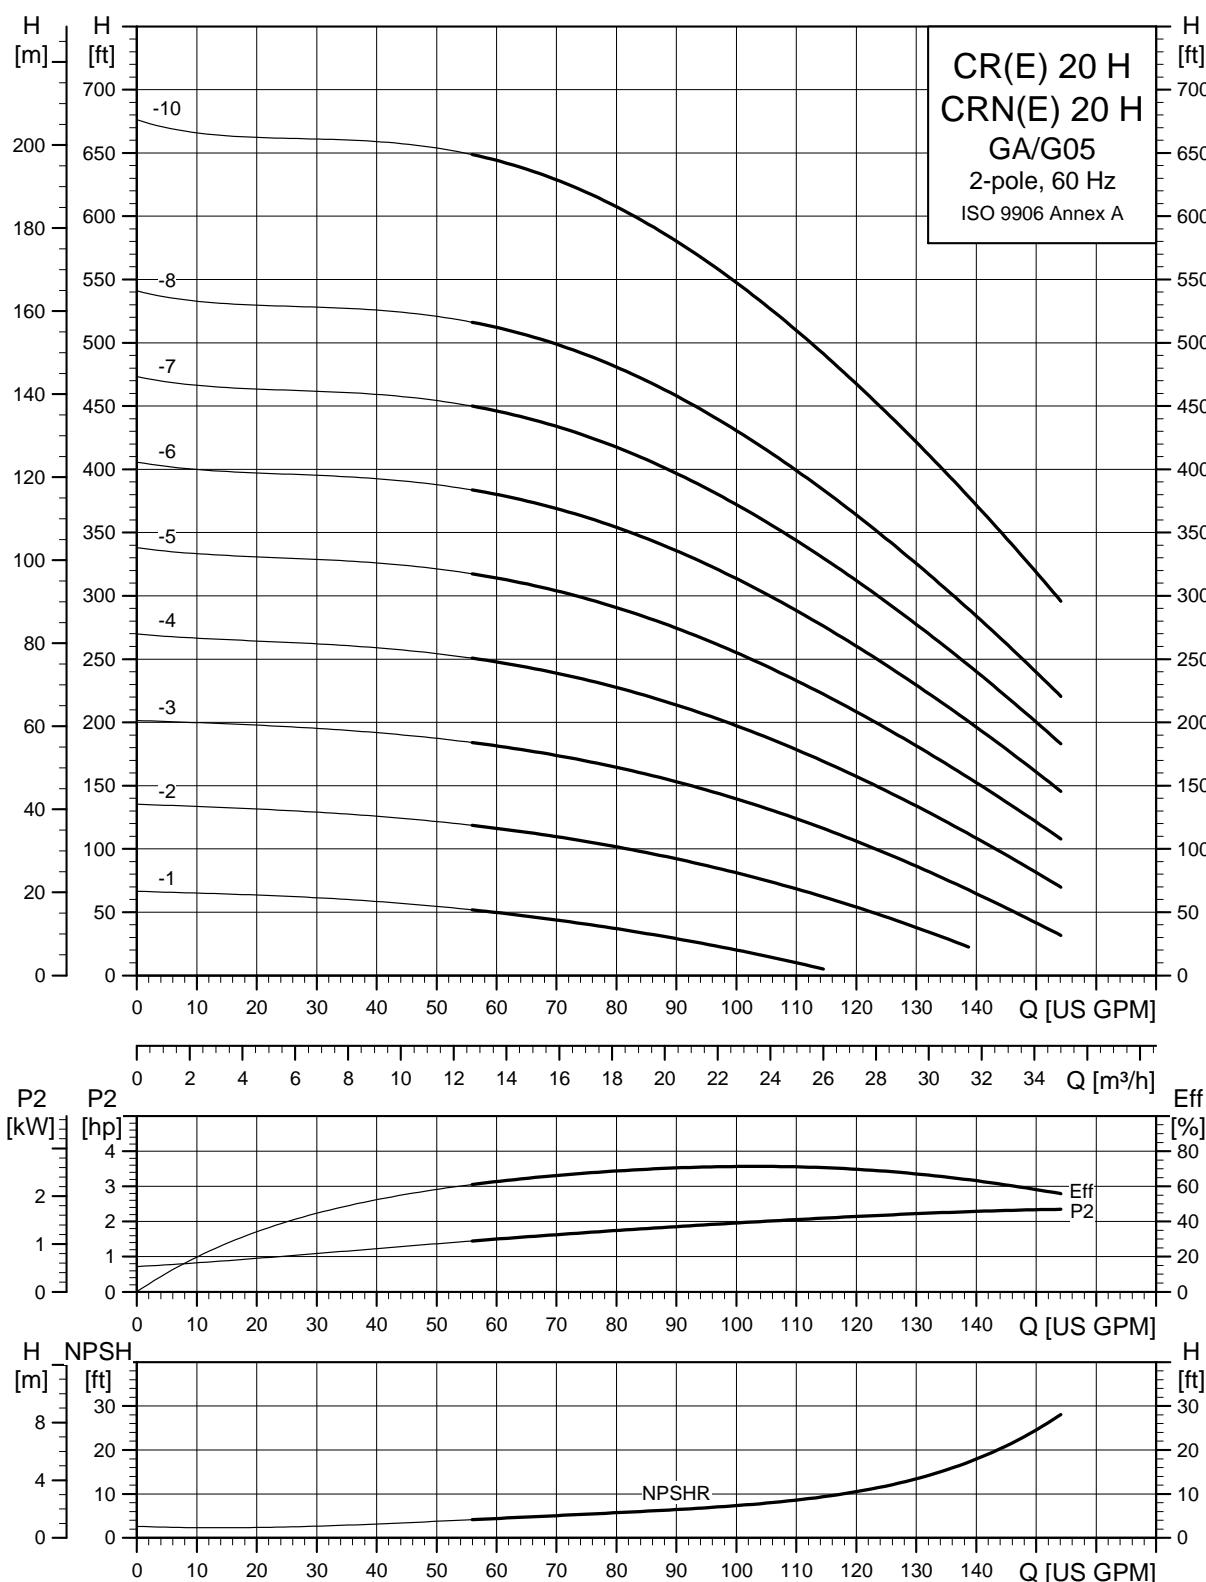

TMO42989012

Dimensions and weights GA (1.5" x 1" x 6", 1.5" x 1" x 8")

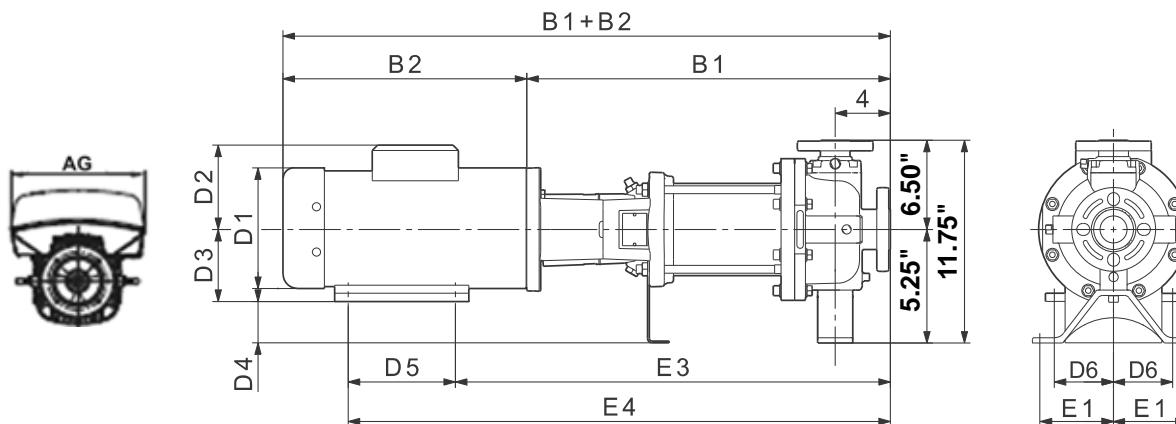

TM06 9699 1014 - TM04 4818 0310


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]	
			B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5	D6	D1	D2	B1+B2	D1	D2	AG	B1+B2		
CR(N)(E) 20-1 H	3	1	20.50	35.13	3.00	24.13	28.63	8.63	6.75	4.50	0.75	4.50	3.75	181	-	-	-	-	-	-	-	-
		3	20.50	33.75	3.00	24.13	28.63	7.00	4.38	4.50	0.75	4.50	3.75	155	-	-	-	4.80	6.22	10.56	31.33	175
CR(N)(E) 20-2 H	5	1	20.50	36.00	3.00	24.25	28.75	10.63	8.00	5.25	0.00	4.50	3.75	206	-	-	-	-	-	-	-	-
		3	20.50	36.00	3.00	24.25	28.75	8.63	5.25	4.50	0.75	4.50	3.75	175	-	-	-	7.53	7.91	11.46	33.65	199
CR(N)(E) 20-3 H	7 1/2	1	22.75	38.25	3.00	27.25	32.75	10.25	7.63	5.25	0.00	5.50	4.25	227	-	-	-	-	-	-	-	-
		3	22.75	38.25	3.00	27.25	32.75	8.63	5.25	5.25	0.00	5.50	4.25	199	-	-	-	7.53	7.91	11.46	37.12	236
CR(N)(E) 20-4 H	10	1	24.50	40.63	3.00	29.00	36.00	10.25	10.25	5.25	0.00	7.00	4.25	355	-	-	-	-	-	-	-	-
		3	24.50	39.75	3.00	29.00	36.00	10.25	6.25	5.25	0.00	7.00	4.25	232	-	-	-	10.04	9.33	13.62	39.81	242
CR(N) 20-5 H	15	3	27.00	45.50	3.00	32.00	40.25	12.38	8.00	6.25	-1.00	8.25	5.00	371	10.63	8.00	45.13	10.04	9.33	13.62	42.98	310
CR(N) 20-6 H	15	3	28.75	47.25	3.00	33.75	42.00	12.38	8.00	6.25	-1.00	8.25	5.00	375	10.63	8.00	47.00	10.04	9.33	13.62	44.73	315
CR(N) 20-7 H	20	3	30.50	49.13	3.00	35.50	45.50	12.38	8.00	6.25	-1.00	10.00	5.00	393	11.50	9.00	48.50	13.39	12.13	16.54	49.28	584
CR(N) 20-8 H	20	3	32.25	50.88	3.00	37.25	47.25	12.38	8.00	6.25	-1.00	10.00	5.00	402	11.50	9.00	50.25	13.39	12.13	16.54	51.03	588
CR(N) 20-10 H	25	3	35.00	57.38	3.00	40.00	49.50	12.38	8.00	7.00	-1.75	9.50	5.50	490	11.50	11.38	54.13	13.39	12.13	16.54	57.72	626

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.

Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

Dimensions and weights G05 (2" x 1" x 10")

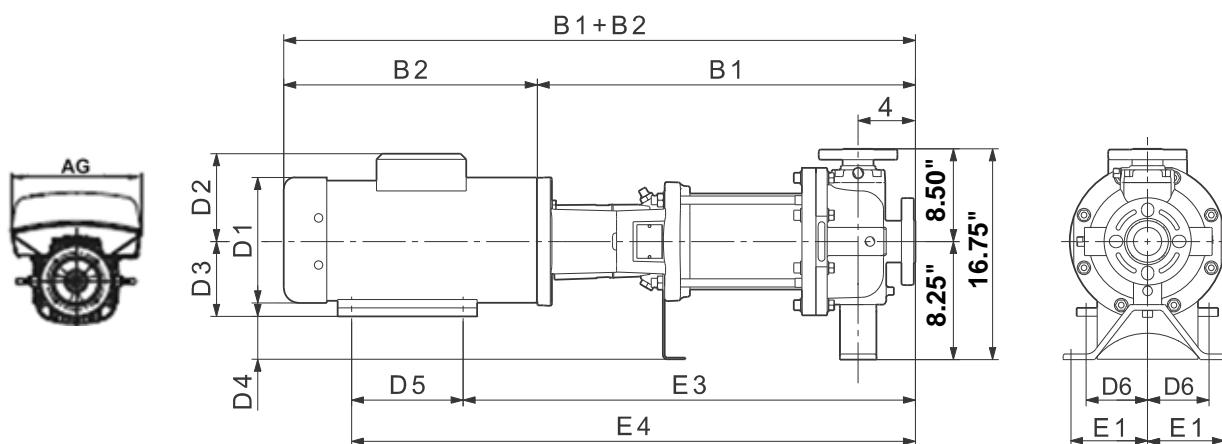


TM06 96699 1014 - TM04 4642 0310

Pump type	HP PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
		B1	B1+B2	E1	E3	E4	D1	D2	D3	D4	D5		D1	D2	B1+B2	D1	D2	AG	B1+B2			
CR(N)(E) 20-1 H	3	1	20.50	35.13	4.88	24.13	28.63	8.63	6.75	4.50	3.75	4.50	3.75	-	-	-	-	-	-			
		3	20.50	33.75	4.88	24.13	28.63	7.00	4.38	4.50	3.75	4.50	3.75	-	-	-	4.80	6.22	10.56	31.33	336	
CR(N)(E) 20-2 H	5	1	20.50	36.00	4.88	24.25	28.75	10.63	8.00	5.25	3.00	4.50	3.75	-	-	-	-	-	-	-		
		3	20.50	36.00	4.88	24.25	28.75	8.63	5.25	4.50	3.75	4.50	3.75	-	-	-	7.53	7.91	11.46	33.65	359	
CR(N)(E) 20-3 H	7 1/2	1	22.75	38.25	4.88	27.25	32.75	10.25	7.63	5.25	3.00	5.50	4.25	227	-	-	-	-	-	-	-	
		3	22.75	38.25	4.88	27.25	32.75	8.63	5.25	5.25	3.00	5.50	4.25	199	-	-	-	7.53	7.91	11.46	37.12	392
CR(N)(E) 20-4 H	10	1	24.50	40.63	4.88	29.00	36.00	10.25	10.25	5.25	3.00	7.00	4.25	355	-	-	-	-	-	-	-	
		3	24.50	39.75	4.88	29.00	36.00	10.25	6.25	5.25	3.00	7.00	4.25	232	-	-	-	10.04	9.33	13.62	39.81	398
CR(N) 20-5 H	15	3	27.00	45.50	4.88	32.00	40.25	12.38	8.00	6.25	2.00	8.25	5.00	371	10.63	8.00	45.13	10.04	9.33	13.62	42.98	467
CR(N) 20-6 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	6.25	2.00	8.25	5.00	375	10.63	8.00	47.00	10.04	9.33	13.62	44.73	471
CR(N) 20-7 H	20	3	30.50	49.13	4.88	35.50	45.50	12.38	8.00	6.25	2.00	10.00	5.00	393	11.50	9.00	48.50	13.39	12.13	16.54	49.28	584
CR(N) 20-8 H	20	3	32.25	50.88	4.88	37.25	47.25	12.38	8.00	6.25	2.00	10.00	5.00	402	11.50	9.00	50.25	13.39	12.13	16.54	51.03	588
CR(N) 20-10 H	25	3	35.00	57.38	4.88	40.00	49.50	12.38	8.00	7.00	1.25	9.50	5.50	490	11.50	11.38	54.13	13.39	12.13	16.54	57.72	626


Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 Hp and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

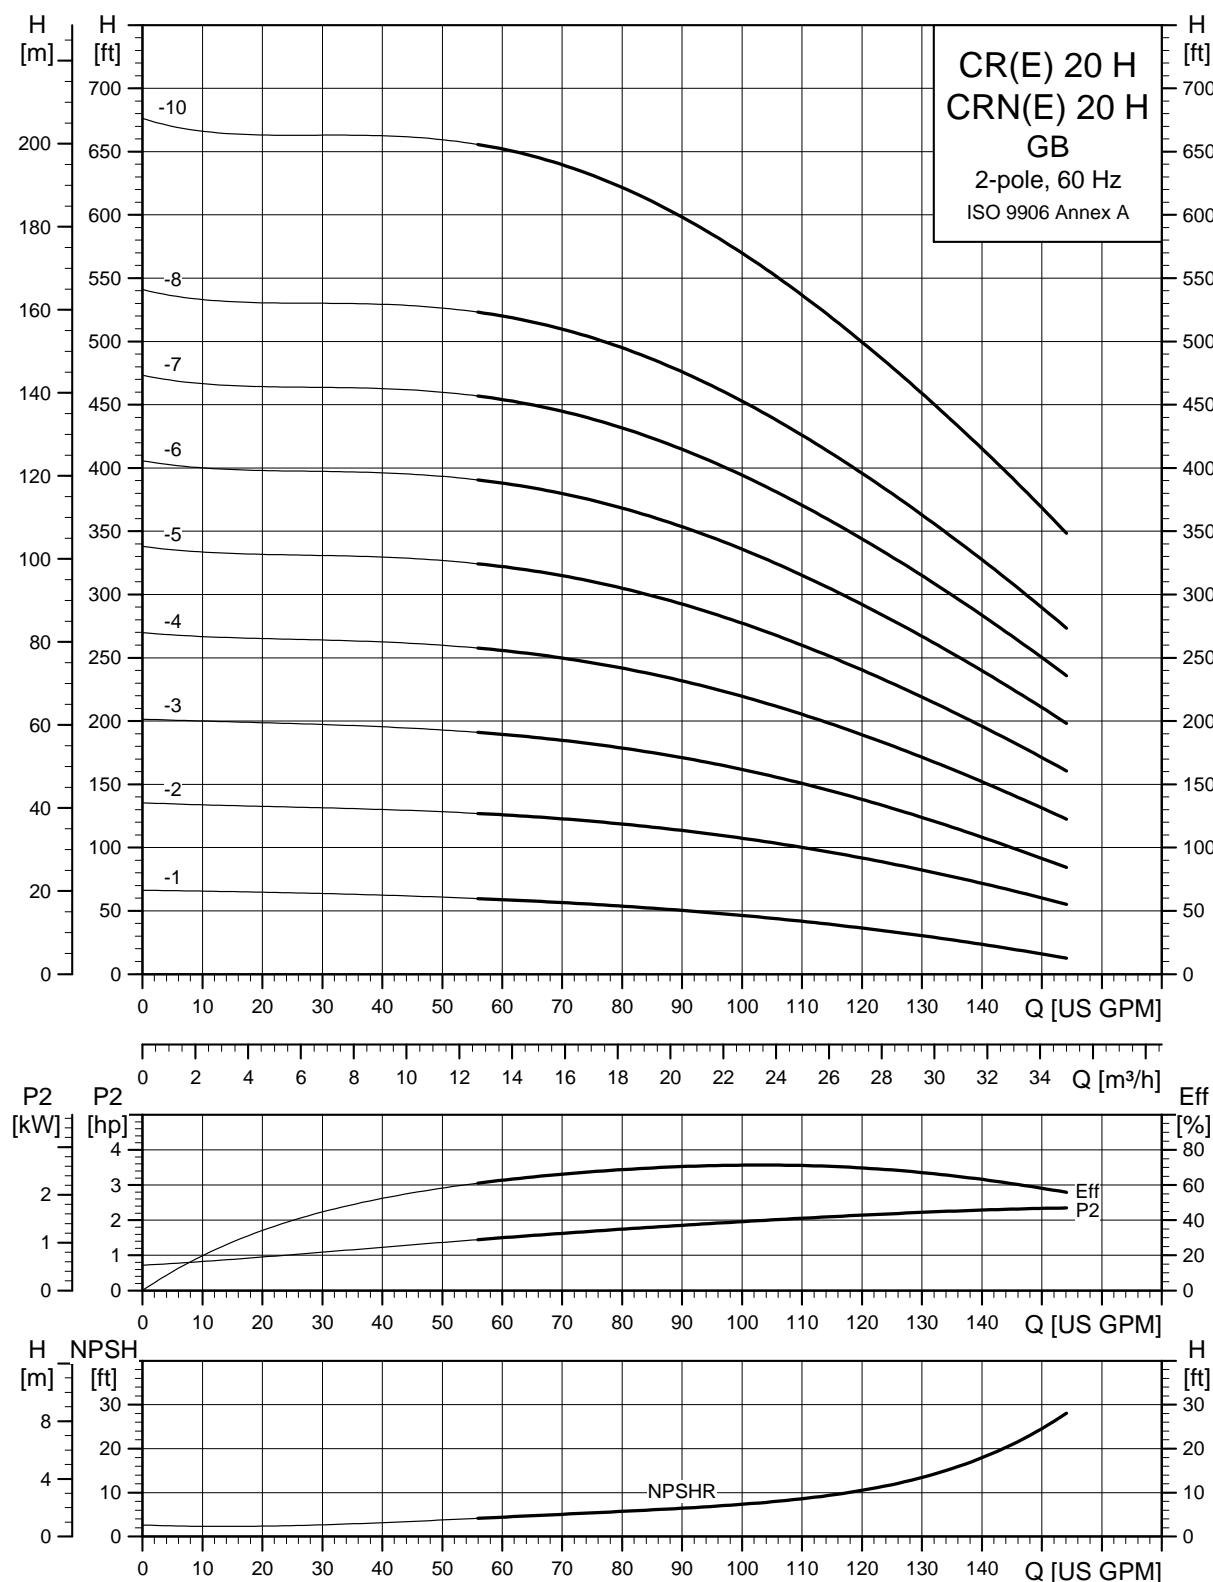CR, CRE, CRN, CRNE 20 H GB

TM04 6290 0912

Dimensions and weights GB (3" x 1.5" x 6", 3" x 1.5" x 8")

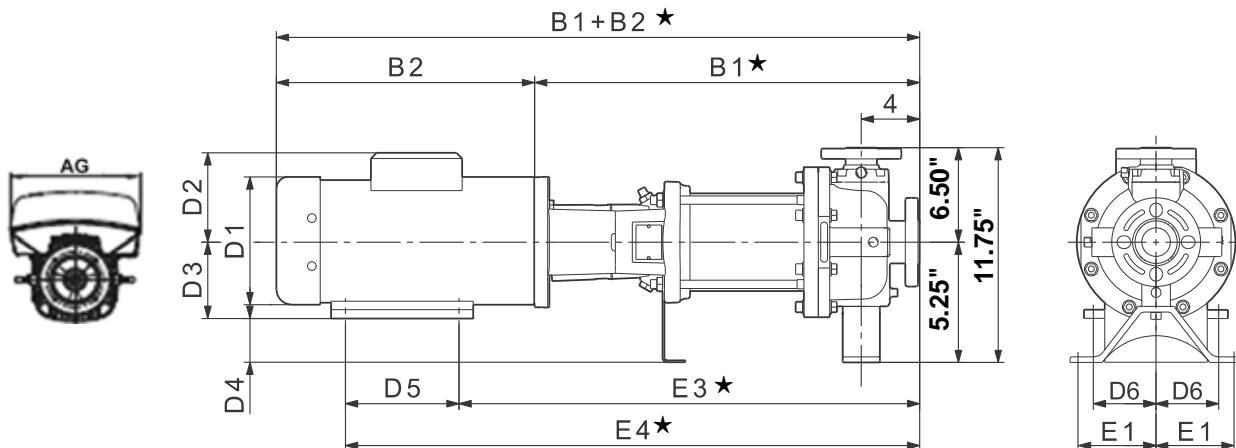


TM06 9699 1014 - TM04 4818 0310

Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]	
			B1 ★	B1+B2 ★	E1	E ★	E4 ★	D1	D2	D3	D4	D5	D6	D1	D2	B1+B2 ★	D1	D2	AG	B1+B2 ★		
CR(N)(E) 20-1 H	3	1	21.50	36.13	3.00	25.13	29.63	8.63	6.75	4.50	0.75	4.50	3.75	143	-	-	-	-	-	-	-	
		3	21.50	34.75	3.00	25.13	29.63	7.00	4.38	4.50	0.75	4.50	3.75	115	-	-	-	4.80	6.22	10.56	32.33	180
CR(N)(E) 20-2 H	5	1	21.50	37.00	3.00	25.25	29.75	10.63	8.00	5.25	0.00	4.50	3.75	258	-	-	-	-	-	-	-	-
		3	21.50	37.00	3.00	25.25	29.75	8.63	5.25	4.50	0.75	4.50	3.75	251	-	-	-	7.53	7.91	11.46	34.65	203
CR(N)(E) 20-3 H	7 1/2	1	23.75	39.38	3.00	28.25	33.75	10.25	7.63	5.25	0.00	5.50	4.25	271	-	-	-	-	-	-	-	-
		3	23.75	39.25	3.00	28.25	33.75	8.63	5.25	5.25	0.00	5.50	4.25	260	-	-	-	7.53	7.91	11.46	38.12	242
CR(N)(E) 20-4 H	10	1	25.63	41.63	3.00	30.13	37.13	10.25	10.25	5.25	0.00	7.00	4.25	317	-	-	-	-	-	-	-	-
		3	25.63	40.75	3.00	30.13	37.13	10.25	6.25	5.25	0.00	7.00	4.25	262	-	-	-	10.04	9.33	13.62	40.94	247
CR(N) 20-5 H	15	3	28.00	46.50	3.00	33.00	41.25	12.38	8.00	6.25	-1.00	8.25	5.00	333	10.63	8.00	46.25	10.04	9.33	13.62	43.98	317
CR(N) 20-6 H	15	3	29.75	48.38	3.00	34.75	43.00	12.38	8.00	6.25	-1.00	8.25	5.00	355	10.63	8.00	48.00	10.04	9.33	13.62	45.73	321
CR(N) 20-7 H	20	3	31.50	50.13	3.00	36.50	46.50	12.38	8.00	6.25	-1.00	10.00	5.00	370	11.50	9.00	49.50	13.39	12.13	16.54	50.28	584
CR(N) 20-8 H	20	3	33.38	51.88	3.00	38.38	48.38	12.38	8.00	6.25	-1.00	10.00	5.00	374	11.50	9.00	51.25	13.39	12.13	16.54	52.16	588
CR(N) 20-10 H	25	3	36.00	58.38	3.00	41.00	50.50	12.38	8.00	7.00	-1.75	9.50	5.50	465	11.50	11.38	55.13	13.39	12.13	16.54	58.72	626


Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

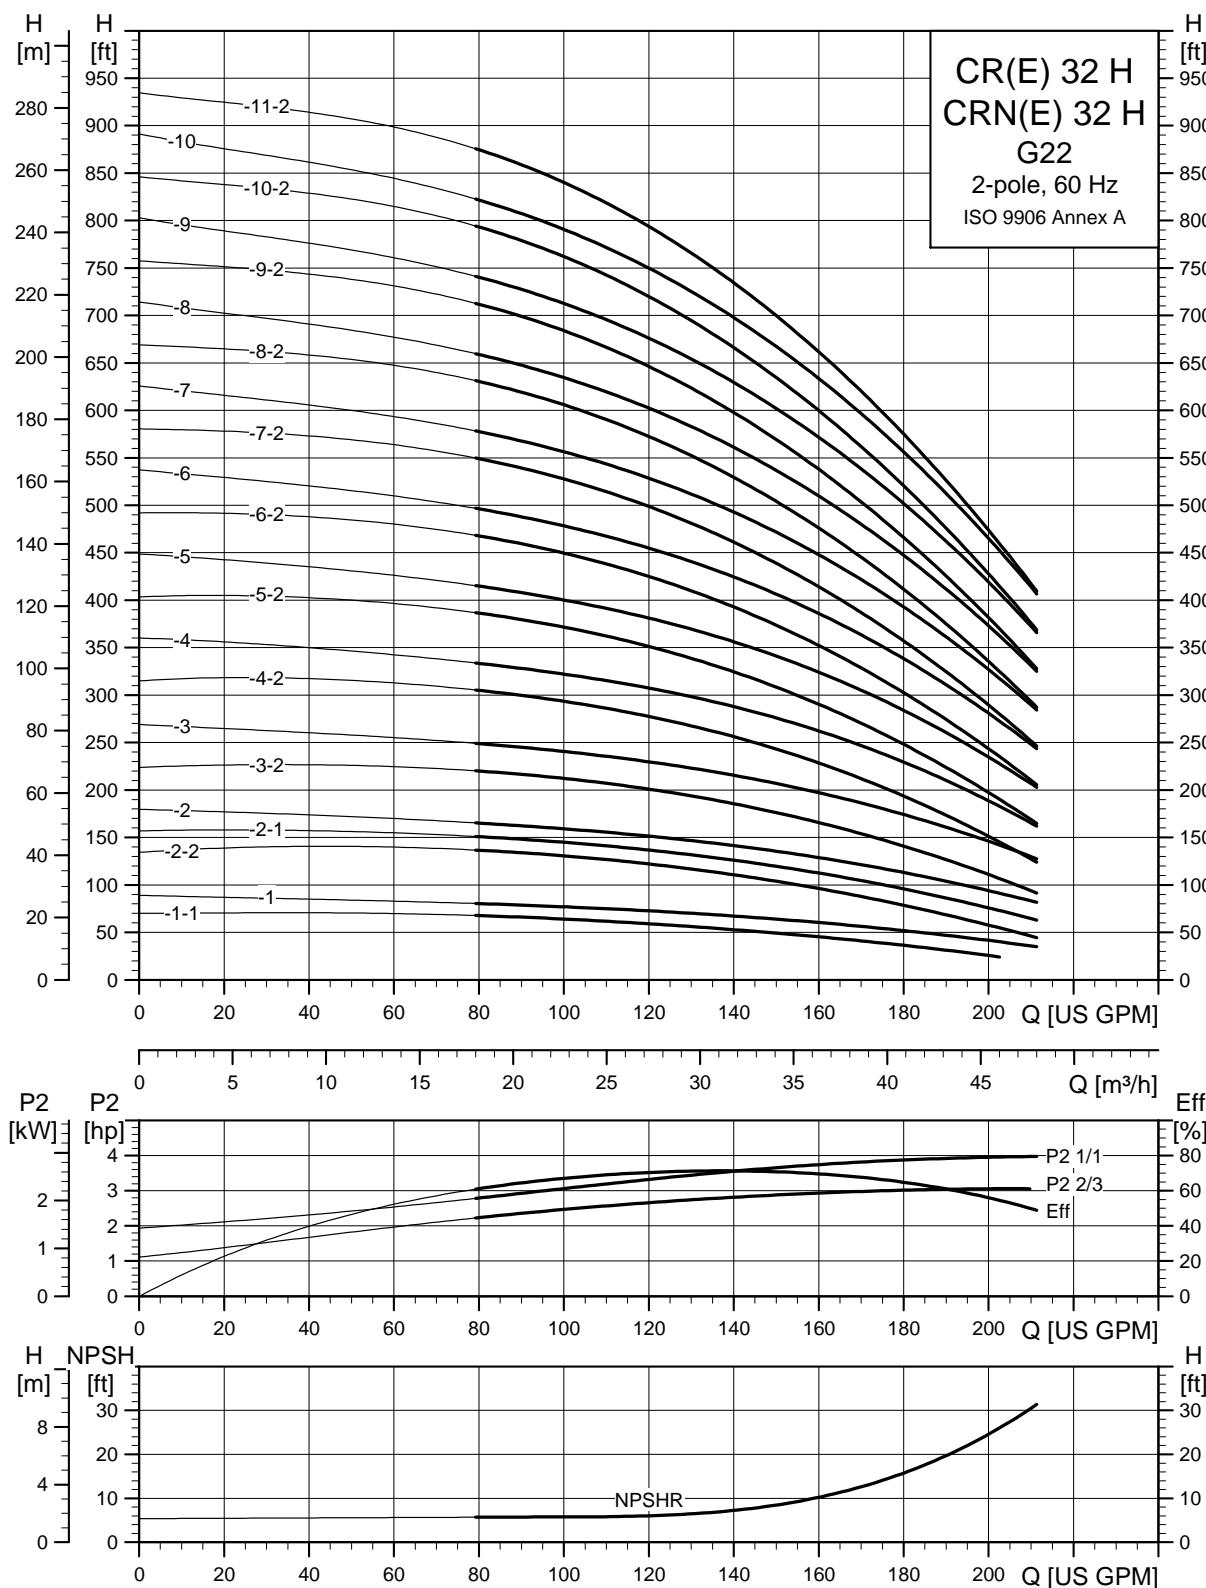CR, CRE, CRN, CRNE 32 H G22

TM04 6295 0912

Dimensions and weights G22 (2" x 2")

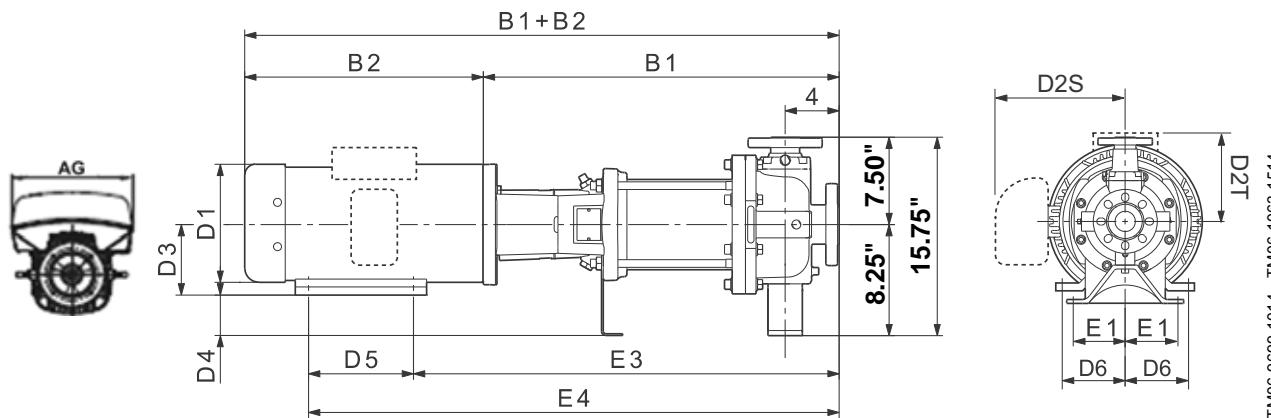


Pump type	HP PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]	
		B1	B1+B2	E1	E3	E4	D1	D2T	D2S	D3	D4		D1	D2	B1+B2	D1	D2	AG	B1+B2	
CR(N) 32-1-1 H	5	1	25.00	40.50	4.88	28.75	33.25	10.63	8.00	-	5.25	3.00	4.50	3.75	353	-	-	-	-	-
		3	25.00	40.50	4.88	28.75	33.25	8.63	5.25	-	4.50	3.75	4.50	3.75	335	-	-	-	-	-
CR(N)(E) 32-1 H	5	1	25.00	40.50	4.88	28.75	33.25	10.63	8.00	-	5.25	3.00	4.50	3.75	353	-	-	-	-	-
		3	25.00	40.50	4.88	28.75	33.25	8.63	5.25	-	4.50	3.75	4.50	3.75	335	-	-	-	-	-
CR(N) 32-2-2 H	7 1/2	1	28.25	43.75	4.88	32.75	38.25	10.25	7.63	-	5.25	3.00	5.50	4.25	371	-	-	-	-	-
		3	28.25	43.75	4.88	32.75	38.25	8.63	5.25	-	5.25	3.00	5.50	4.25	351	-	-	-	7.53	7.91
CR(N)(E) 32-2-1 H 7 1/2	1	28.25	43.75	4.88	32.75	38.25	10.25	7.63	-	5.25	3.00	5.50	4.25	371	-	-	-	-	-	-
		3	28.25	43.75	4.88	32.75	38.25	8.63	5.25	-	5.25	3.00	5.50	4.25	351	-	-	-	7.53	7.91
CR(N) 32-2 H	10	1	28.25	44.25	4.88	32.75	39.75	10.25	10.25	-	5.25	3.00	7.00	4.25	426	-	-	-	-	-
		3	28.25	44.25	4.88	32.75	39.75	10.25	6.25	-	5.25	3.00	7.00	4.25	374	-	-	-	10.04	9.33
CR(N)(E) 32-3-2 H	10	1	31.00	47.00	4.88	35.50	42.50	10.25	10.25	-	5.25	3.00	7.00	4.25	453	-	-	-	-	-
		3	31.00	46.13	4.88	35.50	42.50	10.25	6.25	-	5.25	3.00	7.00	4.25	400	-	-	-	10.04	9.33
CR(N) 32-3 H	15	3	30.50	49.00	4.88	35.50	43.75	12.38	8.00	-	6.25	2.00	8.25	5.00	479	10.63	8.00	48.63	10.04	9.33
CR(N)(E) 32-4-2 H	15	3	33.25	51.75	4.88	38.25	46.50	12.38	8.00	-	6.25	2.00	8.25	5.00	485	10.63	8.00	51.38	10.04	9.33
CR(N) 32-4 H	20	3	33.25	51.75	4.88	38.25	48.25	12.38	8.00	-	6.25	2.00	10.00	5.00	480	11.50	9.00	51.13	13.39	12.13
CR(N)(E) 32-5-2 H	20	3	36.00	54.50	4.88	41.00	51.00	12.38	8.00	-	6.25	2.00	10.00	5.00	487	11.50	9.00	53.88	13.39	12.13
CR(N)(E) 32-5 H	20	3	36.00	54.50	4.88	41.00	51.00	12.38	8.00	-	6.25	2.00	10.00	5.00	487	11.50	9.00	53.88	13.39	12.13
CR(N) 32-6-2 H	25	3	38.75	61.13	4.88	43.75	53.25	12.38	8.00	-	7.00	1.25	9.50	5.50	590	11.50	11.38	57.75	13.39	12.13
CR(N)(E) 32-6 H	25	3	38.75	61.13	4.88	43.75	53.25	12.38	8.00	-	7.00	1.25	9.50	5.50	590	11.50	11.38	57.75	13.39	12.13
CR(N) 32-7-2 H	30	3	41.50	63.88	4.88	46.50	57.50	12.38	8.00	-	7.00	1.25	11.00	5.50	623	11.50	11.38	62.00	13.39	12.13
CR(N)(E) 32-7 H	30	3	41.50	63.88	4.88	46.50	57.50	12.38	8.00	-	7.00	1.25	11.00	5.50	623	11.50	11.38	62.00	13.39	12.13
CR(N)(E) 32-8-2 H	30	3	44.25	66.63	4.88	49.25	60.25	12.38	8.00	-	7.00	1.25	11.00	5.50	636	11.50	11.38	64.75	13.39	12.13
CR(N) 32-8 H	40	3	44.25	67.38	4.88	49.25	60.25	15.00	-	13.13	7.00	1.25	11.00	5.50	887	13.25	12.25	65.38	-	-
CR(N) 32-9-2 H	40	3	47.00	70.25	4.88	52.00	63.00	15.00	-	13.13	7.00	1.25	11.00	5.50	896	13.25	12.25	68.25	-	-
CR(N) 32-9 H	40	3	47.00	70.25	4.88	52.00	63.00	15.00	-	13.13	7.00	1.25	11.00	5.50	896	13.25	12.25	68.25	-	-
CR(N) 32-10-2 H	40	3	49.75	73.00	4.88	54.75	65.75	15.00	-	13.13	7.00	1.25	11.00	5.50	912	13.25	12.25	71.00	-	-
CR(N) 32-10 H	40	3	49.75	73.00	4.88	54.75	65.75	15.00	-	13.13	7.00	1.25	11.00	5.50	912	13.25	12.25	71.00	-	-
CR(N) 32-11-2 H	50	3	52.50	77.88	4.88	58.00	70.00	16.88	-	14.50	8.00	0.25	12.00	6.25	974	13.25	12.25	74.75	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

CR, CRE, CRN, CRNE 32 H GA/G05

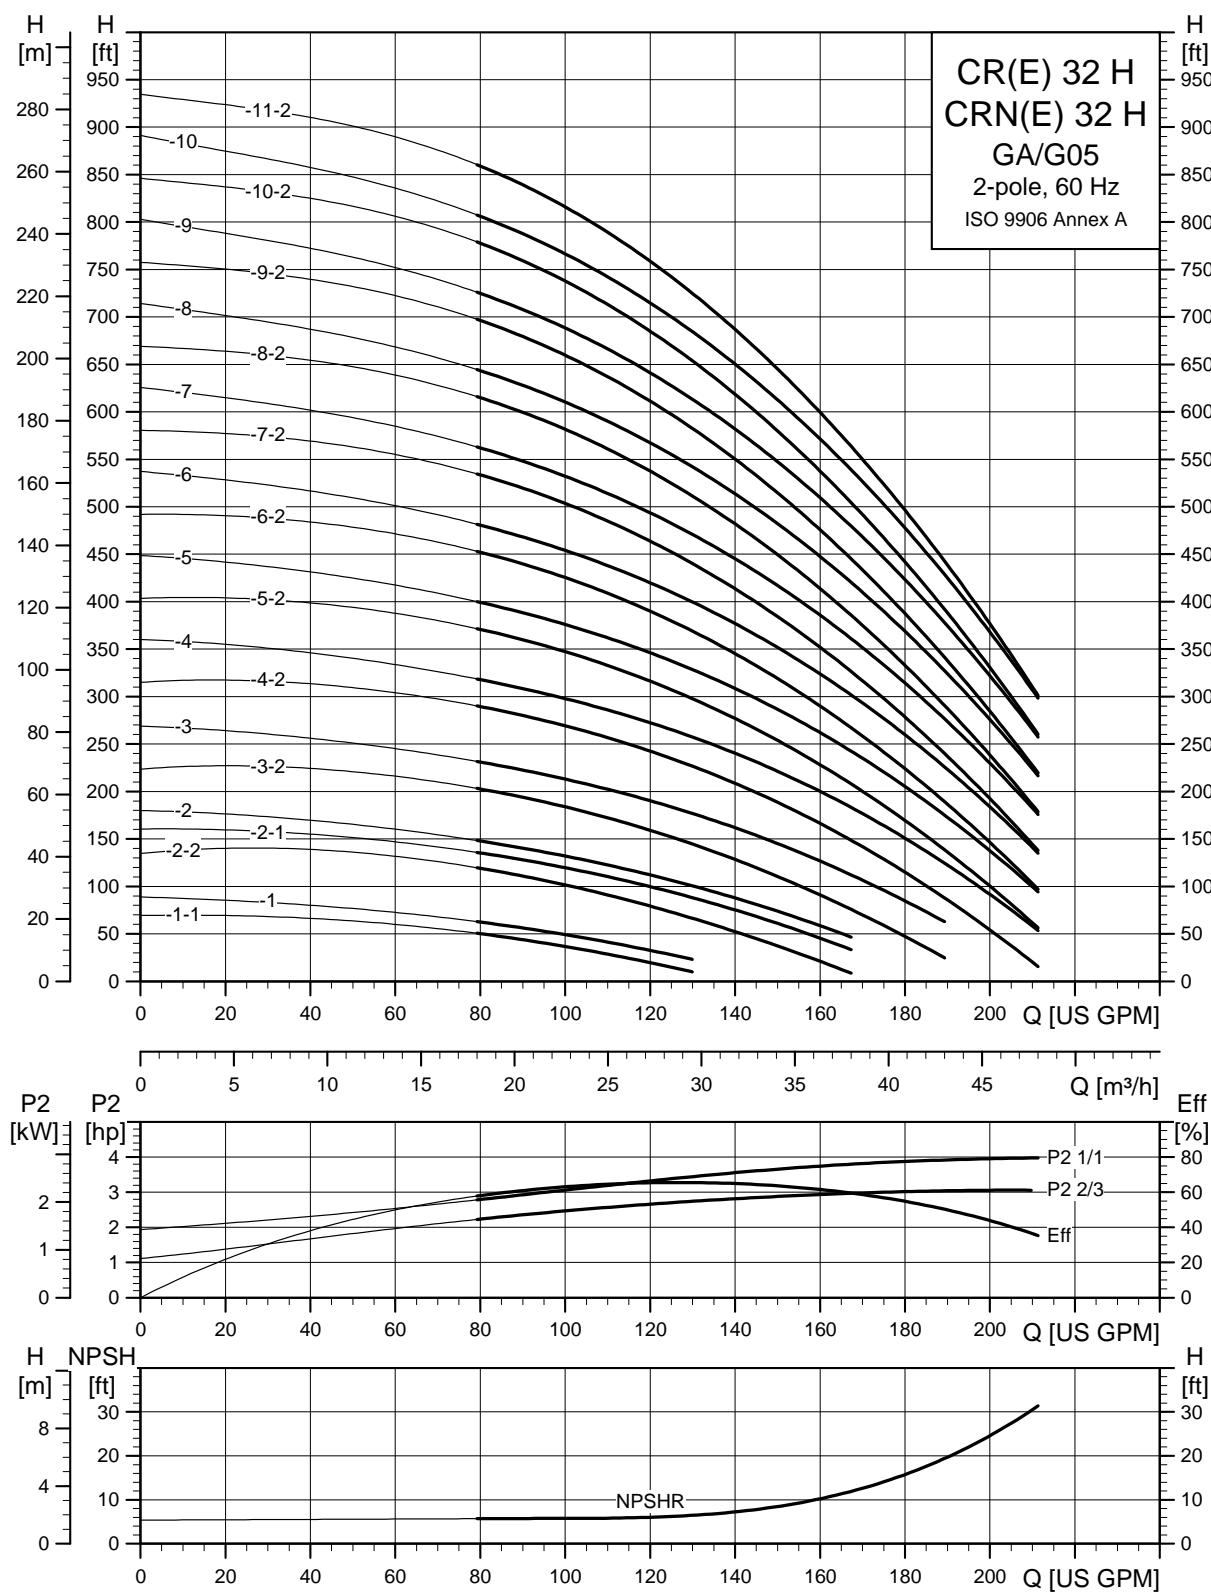

TM04-6292-0912

Dimensions and weights GA (1.5" x 1" x 6", 1.5" x 1" x 8")

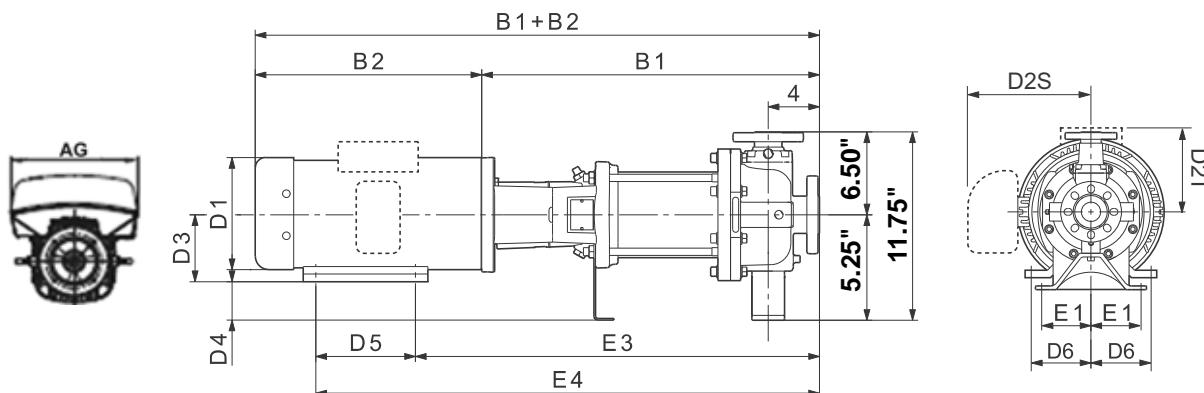


TM06 98991014 - TM06 10631514

Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
			B1	B1+ B2	E1	E3	E4	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2		
			1	25.00	40.50	3.00	28.75	33.25	10.63	8.00	-	5.25	0.00	4.50	3.75	344	-	-	-	-	-	-	-
CR(N) 32-1-1 H	5	1	25.00	40.50	3.00	28.75	33.25	8.63	5.25	-	4.50	0.75	4.50	3.75	327	-	-	-	-	-	-	-	-
CR(N) 32-1-1 H	5	3	25.00	40.50	3.00	28.75	33.25	10.63	8.00	-	5.25	0.00	4.50	3.75	344	-	-	-	-	-	-	-	-
CR(N) 32-1-1 H	5	1	25.00	40.50	3.00	28.75	33.25	8.63	5.25	-	4.50	0.75	4.50	3.75	327	-	-	-	7.53	7.91	11.46	38.15	300
CR(N) 32-2-2 H	7 1/2	1	28.25	43.75	3.00	32.75	38.25	10.25	7.63	-	5.25	0.00	5.50	4.25	362	-	-	-	-	-	-	-	-
CR(N) 32-2-2 H	7 1/2	3	28.25	43.75	3.00	32.75	38.25	8.63	5.25	-	5.25	0.00	5.50	4.25	342	-	-	-	7.53	7.91	11.46	42.62	332
CR(N)(E) 32-2-1 H	7 1/2	1	28.25	43.75	3.00	32.75	38.25	10.25	7.63	-	5.25	0.00	5.50	4.25	362	-	-	-	-	-	-	-	-
CR(N)(E) 32-2-1 H	7 1/2	3	28.25	43.75	3.00	32.75	38.25	8.63	5.25	-	5.25	0.00	5.50	4.25	342	-	-	-	7.53	7.91	11.46	42.62	332
CR(N) 32-2 H	10	1	28.25	44.25	3.00	32.75	39.75	10.25	10.25	-	5.25	0.00	7.00	4.25	417	-	-	-	-	-	-	-	-
CR(N) 32-2 H	10	3	28.25	43.38	3.00	32.75	39.75	10.25	6.25	-	5.25	0.00	7.00	4.25	365	-	-	-	10.04	9.33	13.62	43.56	335
CR(N)(E) 32-3-2 H	10	1	31.00	47.00	3.00	35.50	42.50	10.25	10.25	-	5.25	0.00	7.00	4.25	442	-	-	-	-	-	-	-	-
CR(N)(E) 32-3-2 H	10	3	31.00	46.13	3.00	35.50	42.50	10.25	6.25	-	5.25	0.00	7.00	4.25	389	-	-	-	10.04	9.33	13.62	46.31	359
CR(N) 32-3 H	15	3	30.50	49.00	3.00	35.50	43.75	12.38	8.00	-	6.25	-1.00	8.25	5.00	468	10.63	8.00	48.63	10.04	9.33	13.62	46.48	423
CR(N)(E) 32-4-2 H	15	3	33.25	51.75	3.00	38.25	46.50	12.38	8.00	-	6.25	-1.00	8.25	5.00	474	10.63	8.00	51.38	10.04	9.33	13.62	49.23	429
CR(N) 32-4 H	20	3	33.25	51.75	3.00	38.25	48.25	12.38	8.00	-	6.25	-1.00	10.00	5.00	469	11.50	9.00	51.13	13.39	12.13	16.54	52.03	579
CR(N)(E) 32-5-2 H	20	3	36.00	54.50	3.00	41.00	51.00	12.38	8.00	-	6.25	-1.00	10.00	5.00	476	11.50	9.00	53.88	13.39	12.13	16.54	54.78	586
CR(N)(E) 32-5 H	20	3	36.00	54.50	3.00	41.00	51.00	12.38	8.00	-	6.25	-1.00	10.00	5.00	476	11.50	9.00	53.88	13.39	12.13	16.54	54.78	586
CR(N) 32-6-2 H	25	3	38.75	61.13	3.00	43.75	53.25	12.38	8.00	-	7.00	-1.75	9.50	5.50	581	11.50	11.38	57.75	13.39	12.13	16.54	61.47	694
CR(N)(E) 32-6 H	25	3	38.75	61.13	3.00	43.75	53.25	12.38	8.00	-	7.00	-1.75	9.50	5.50	581	11.50	11.38	57.75	13.39	12.13	16.54	61.47	694
CR(N) 32-7-2 H	30	3	41.50	63.88	3.00	46.50	57.50	12.38	8.00	-	7.00	-1.75	11.00	5.50	614	11.50	11.38	62.00	13.39	12.13	16.54	64.22	729
CR(N)(E) 32-7 H	30	3	41.50	63.88	3.00	46.50	57.50	12.38	8.00	-	7.00	-1.75	11.00	5.50	614	11.50	11.38	62.00	13.39	12.13	16.54	64.22	729
CR(N)(E) 32-8-2 H	30	3	44.25	66.63	3.00	49.25	60.25	12.38	8.00	-	7.00	-1.75	11.00	5.50	627	11.50	11.38	64.75	13.39	12.13	16.54	66.97	743
CR(N) 32-8 H	40	3	44.25	67.38	3.00	49.25	60.25	15.00	-	13.13	7.00	-1.75	11.00	5.50	879	13.25	12.25	65.38	-	-	-	-	-
CR(N) 32-9-2 H	40	3	47.00	70.25	3.00	52.00	63.00	15.00	-	13.13	7.00	-1.75	11.00	5.50	887	13.25	12.25	68.25	-	-	-	-	-
CR(N) 32-9 H	40	3	47.00	70.25	3.00	52.00	63.00	15.00	-	13.13	7.00	-1.75	11.00	5.50	887	13.25	12.25	68.25	-	-	-	-	-
CR(N) 32-10-2 H	40	3	49.75	73.00	3.00	54.75	65.75	15.00	-	13.13	7.00	-1.75	11.00	5.50	903	13.25	12.25	71.00	-	-	-	-	-
CR(N) 32-10 H	40	3	49.75	73.00	3.00	54.75	65.75	15.00	-	13.13	7.00	-1.75	11.00	5.50	903	13.25	12.25	71.00	-	-	-	-	-
CR(N) 32-11-2 H	50	3	52.50	77.88	3.00	58.00	70.00	16.88	-	14.50	8.00	-2.75	12.00	6.25	965	13.25	12.25	74.75	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

Dimensions and weights G05 (2" x 1" x 10")

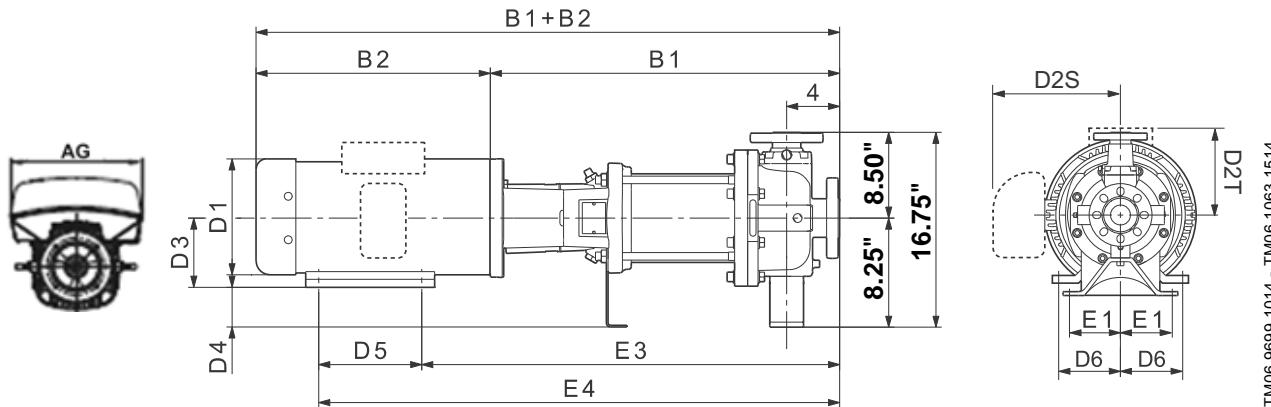


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]		
			B1	B1+ B2	E1	E3	E4	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2	
CR(N) 32-1-1 H	5	1	25.00	40.50	4.88	28.75	33.25	10.63	8.00	-	5.25	3.00	4.50	3.75	414	-	-	-	-	-	-	-
		3	25.00	40.50	4.88	28.75	33.25	8.63	5.25	-	4.50	3.75	4.50	3.75	397	-	-	-	-	-	-	-
CR(N)(E) 32-1 H	5	1	25.00	40.50	4.88	28.75	33.25	10.63	8.00	-	5.25	3.00	4.50	3.75	414	-	-	-	-	-	-	-
		3	25.00	40.50	4.88	28.75	33.25	8.63	5.25	-	4.50	3.75	4.50	3.75	397	-	-	-	7.53	7.91	11.46	38.15
CR(N) 32-2-2 H	7 1/2	1	28.25	43.75	4.88	32.75	38.25	10.25	7.63	-	5.25	3.00	5.50	4.25	431	-	-	-	-	-	-	-
		3	28.25	43.75	4.88	32.75	38.25	8.63	5.25	-	5.25	3.00	5.50	4.25	410	-	-	-	7.53	7.91	11.46	42.62
CR(N)(E) 32-2-1 H 7 1/2	1	28.25	43.75	4.88	32.75	38.25	10.25	7.63	-	5.25	3.00	5.50	4.25	431	-	-	-	-	-	-	-	-
		3	28.25	43.75	4.88	32.75	38.25	8.63	5.25	-	5.25	3.00	5.50	4.25	410	-	-	-	7.53	7.91	11.46	42.62
CR(N) 32-2 H	10	1	28.25	44.25	4.88	32.75	39.75	10.25	10.25	-	5.25	3.00	7.00	4.25	486	-	-	-	-	-	-	-
		3	28.25	43.38	4.88	32.75	39.75	10.25	6.25	-	5.25	3.00	7.00	4.25	433	-	-	-	10.04	9.33	13.62	43.56
CR(N)(E) 32-3-2 H	10	1	31.00	47.00	4.88	35.50	42.50	10.25	10.25	-	5.25	3.00	7.00	4.25	494	-	-	-	-	-	-	-
		3	31.00	46.13	4.88	35.50	42.50	10.25	6.25	-	5.25	3.00	7.00	4.25	442	-	-	-	10.04	9.33	13.62	46.31
CR(N) 32-3 H	15	3	30.50	49.00	4.88	35.50	43.75	12.38	8.00	-	6.25	2.00	8.25	5.00	521	10.63	8.00	48.63	10.04	9.33	13.62	46.48
CR(N)(E) 32-4-2 H	15	3	33.25	51.75	4.88	38.25	46.50	12.38	8.00	-	6.25	2.00	8.25	5.00	525	10.63	8.00	51.38	10.04	9.33	13.62	49.23
CR(N) 32-4 H	20	3	33.25	51.75	4.88	38.25	48.25	12.38	8.00	-	6.25	2.00	10.00	5.00	520	11.50	9.00	51.13	13.39	12.13	16.54	52.03
CR(N)(E) 32-5-2 H	20	3	36.00	54.50	4.88	41.00	51.00	12.38	8.00	-	6.25	2.00	10.00	5.00	528	11.50	9.00	53.88	13.39	12.13	16.54	54.78
CR(N)(E) 32-5 H	20	3	36.00	54.50	4.88	41.00	51.00	12.38	8.00	-	6.25	2.00	10.00	5.00	528	11.50	9.00	53.88	13.39	12.13	16.54	54.78
CR(N) 32-6-2 H	25	3	38.75	61.13	4.88	43.75	53.25	12.38	8.00	-	7.00	1.25	9.50	5.50	590	11.50	11.38	57.75	13.39	12.13	16.54	61.47
CR(N)(E) 32-6 H	25	3	38.75	61.13	4.88	43.75	53.25	12.38	8.00	-	7.00	1.25	9.50	5.50	590	11.50	11.38	57.75	13.39	12.13	16.54	61.47
CR(N) 32-7-2 H	30	3	41.50	63.88	4.88	46.50	57.50	12.38	8.00	-	7.00	1.25	11.00	5.50	623	11.50	11.38	62.00	13.39	12.13	16.54	64.22
CR(N)(E) 32-7 H	30	3	41.50	63.88	4.88	46.50	57.50	12.38	8.00	-	7.00	1.25	11.00	5.50	623	11.50	11.38	62.00	13.39	12.13	16.54	64.22
CR(N)(E) 32-8-2 H	30	3	44.25	66.63	4.88	49.25	60.25	12.38	8.00	-	7.00	1.25	11.00	5.50	636	11.50	11.38	64.75	13.39	12.13	16.54	66.97
CR(N) 32-8 H	40	3	44.25	67.38	4.88	49.25	60.25	15.00	-	13.13	7.00	1.25	11.00	5.50	887	13.25	12.25	65.38	-	-	-	-
CR(N) 32-9-2 H	40	3	47.00	70.25	4.88	52.00	63.00	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	68.25	-	-	-	-
CR(N) 32-9 H	40	3	47.00	70.25	4.88	52.00	63.00	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	68.25	-	-	-	-
CR(N) 32-10-2 H	40	3	49.75	73.00	4.88	54.75	65.75	15.00	-	13.13	7.00	1.25	11.00	5.50	912	13.25	12.25	71.00	-	-	-	-
CR(N) 32-10 H	40	3	49.75	73.00	4.88	54.75	65.75	15.00	-	13.13	7.00	1.25	11.00	5.50	912	13.25	12.25	71.00	-	-	-	-
CR(N) 32-11-2 H	50	3	52.50	77.88	4.88	58.00	70.00	16.88	-	14.50	8.00	0.25	12.00	6.25	974	13.25	12.25	74.75	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

CR, CRE, CRN, CRNE 32 H GB/G50

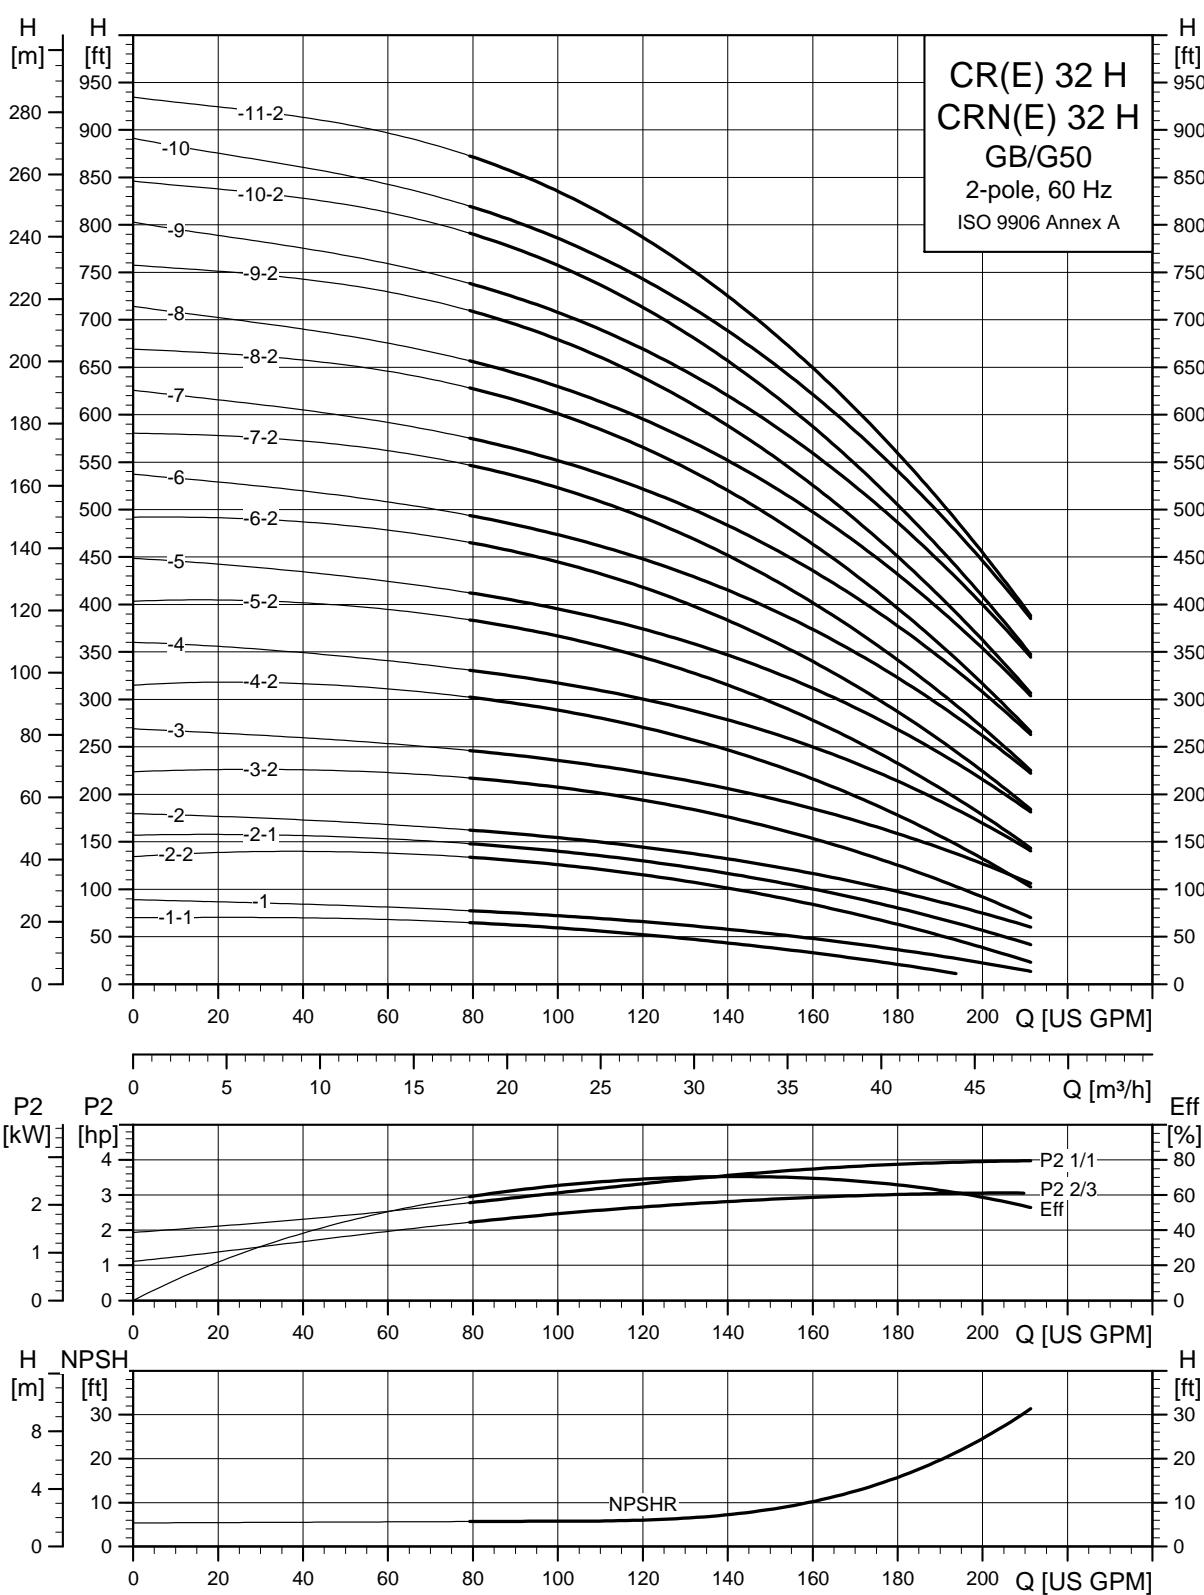

TM04-6293-0912

Dimensions and weights GB (3" x 1.5" x 6", 3" x 1.5" x 8")

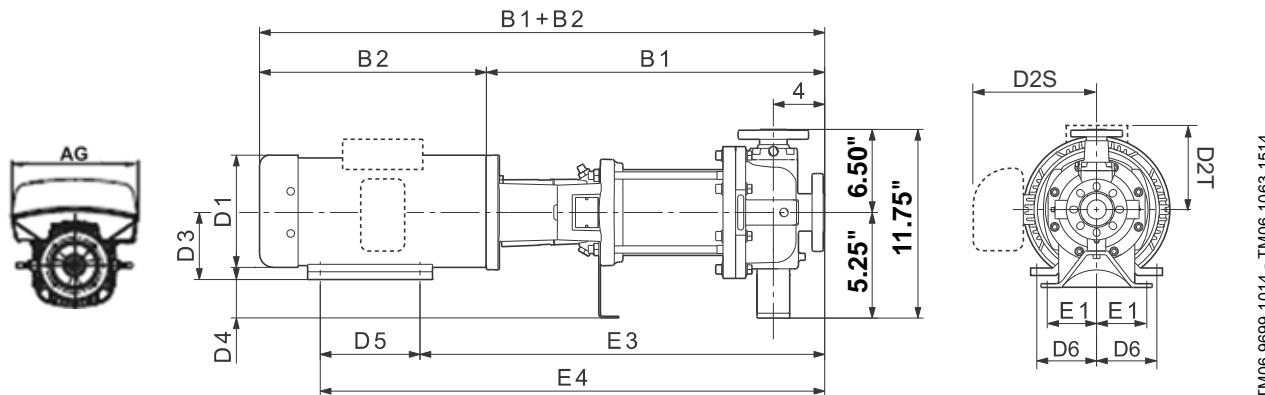


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]		
			B1	B1+ B2	E1	E3	E4	D1	D2T	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2		
CR(N) 32-1-1 H	5	1	26.00	41.50	3.00	29.75	34.25	10.63	8.00	-	5.25	0.00	4.50	3.75	359	-	-	-	-	-	-	-
		3	26.00	41.50	3.00	29.75	34.25	8.63	5.25	-	4.50	0.75	4.50	3.75	342	-	-	-	-	-	-	-
CR(N)(E) 32-1 H	5	1	26.00	41.50	3.00	29.75	34.25	10.63	8.00	-	5.25	0.00	4.50	3.75	359	-	-	-	-	-	-	-
		3	26.00	41.50	3.00	29.75	34.25	8.63	5.25	-	4.50	0.75	4.50	3.75	342	-	-	-	7.53	7.91	11.46	39.15
CR(N) 32-2-2 H	7 1/2	1	29.25	44.75	3.00	33.75	39.25	8.63	5.25	-	5.25	0.00	5.50	4.25	378	-	-	-	-	-	-	-
		3	29.25	44.75	3.00	33.75	39.25	10.25	7.63	-	5.25	0.00	5.50	4.25	357	-	-	-	7.53	7.91	11.46	43.62
CR(N)(E) 32-2-1 H	7 1/2	1	29.25	44.75	3.00	33.75	39.25	10.25	7.63	-	5.25	0.00	5.50	4.25	378	-	-	-	-	-	-	-
		3	29.25	44.75	3.00	33.75	39.25	8.63	5.25	-	5.25	0.00	5.50	4.25	357	-	-	-	7.53	7.91	11.46	43.62
CR(N) 32-2 H	10	1	29.25	45.38	3.00	33.75	40.75	10.25	10.25	-	5.25	0.00	7.00	4.25	433	-	-	-	-	-	-	-
		3	29.25	44.38	3.00	33.75	40.75	10.25	6.25	-	5.25	0.00	7.00	4.25	381	-	-	-	10.04	9.33	13.62	44.56
CR(N)(E) 32-3-2 H	10	1	32.00	48.13	3.00	36.50	43.50	10.25	10.25	-	5.25	0.00	7.00	4.25	459	-	-	-	-	-	-	-
		3	32.00	47.13	3.00	36.50	43.50	10.25	6.25	-	5.25	0.00	7.00	4.25	407	-	-	-	10.04	9.33	13.62	47.31
CR(N) 32-3 H	15	3	31.50	50.00	3.00	36.50	44.75	12.38	8.00	-	6.25	-1.00	8.25	5.00	485	10.63	8.00	49.63	10.04	9.33	13.62	47.48
CR(N)(E) 32-4-2 H	15	3	34.25	52.75	3.00	39.25	47.50	12.38	8.00	-	6.25	-1.00	8.25	5.00	492	10.63	8.00	52.38	10.04	9.33	13.62	50.23
CR(N) 32-4 H	20	3	34.25	52.75	3.00	39.25	49.25	12.38	8.00	-	6.25	-1.00	10.00	5.00	487	11.50	9.00	52.13	13.39	12.13	16.54	53.03
CR(N)(E) 32-5-2 H	20	3	37.00	55.50	3.00	42.00	52.00	12.38	8.00	-	6.25	-1.00	10.00	5.00	493	11.50	9.00	55.00	13.39	12.13	16.54	55.78
CR(N)(E) 32-5 H	20	3	37.00	55.50	3.00	42.00	52.00	12.38	8.00	-	6.25	-1.00	10.00	5.00	493	11.50	9.00	55.00	13.39	12.13	16.54	55.78
CR(N) 32-6-2 H	25	3	39.75	62.13	3.00	44.75	54.25	12.38	8.00	-	7.00	-1.75	9.50	5.50	601	11.50	11.38	58.88	13.39	12.13	16.54	62.47
CR(N)(E) 32-6 H	25	3	39.75	62.13	3.00	44.75	54.25	12.38	8.00	-	7.00	-1.75	9.50	5.50	601	11.50	11.38	58.88	13.39	12.13	16.54	62.47
CR(N) 32-7-2 H	30	3	42.50	64.88	3.00	47.50	58.50	12.38	8.00	-	7.00	-1.75	11.00	5.50	634	11.50	11.38	63.13	13.39	12.13	16.54	65.22
CR(N)(E) 32-7 H	30	3	42.50	64.88	3.00	47.50	58.50	12.38	8.00	-	7.00	-1.75	11.00	5.50	634	11.50	11.38	63.13	13.39	12.13	16.54	65.22
CR(N)(E) 32-8-2 H	30	3	45.25	67.63	3.00	50.25	61.25	12.38	8.00	-	7.00	-1.75	11.00	5.50	647	11.50	11.38	65.88	13.39	12.13	16.54	67.97
CR(N) 32-8 H	40	3	45.25	68.50	3.00	50.25	61.25	15.00	-	13.13	7.00	-1.75	11.00	5.50	898	13.25	12.25	66.50	-	-	-	-
CR(N) 32-9-2 H	40	3	48.00	71.25	3.00	53.00	64.00	15.00	-	13.13	7.00	-1.75	11.00	5.50	914	13.25	12.25	69.25	-	-	-	-
CR(N) 32-9 H	40	3	48.00	71.25	3.00	53.00	64.00	15.00	-	13.13	7.00	-1.75	11.00	5.50	914	13.25	12.25	69.25	-	-	-	-
CR(N) 32-10-2 H	40	3	50.75	74.00	3.00	55.75	66.75	15.00	-	13.13	7.00	-1.75	11.00	5.50	923	13.25	12.25	72.00	-	-	-	-
CR(N) 32-10 H	40	3	50.75	74.00	3.00	55.75	66.75	15.00	-	13.13	7.00	-1.75	11.00	5.50	923	13.25	12.25	72.00	-	-	-	-
CR(N) 32-11-2 H	50	3	53.50	79.00	3.00	59.00	71.00	16.88	-	14.50	8.00	-2.75	12.00	6.25	985	13.25	12.25	75.75	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

Dimensions and weights G50 (3" x 1.5" x 8", 3" x 1.5" x 10")

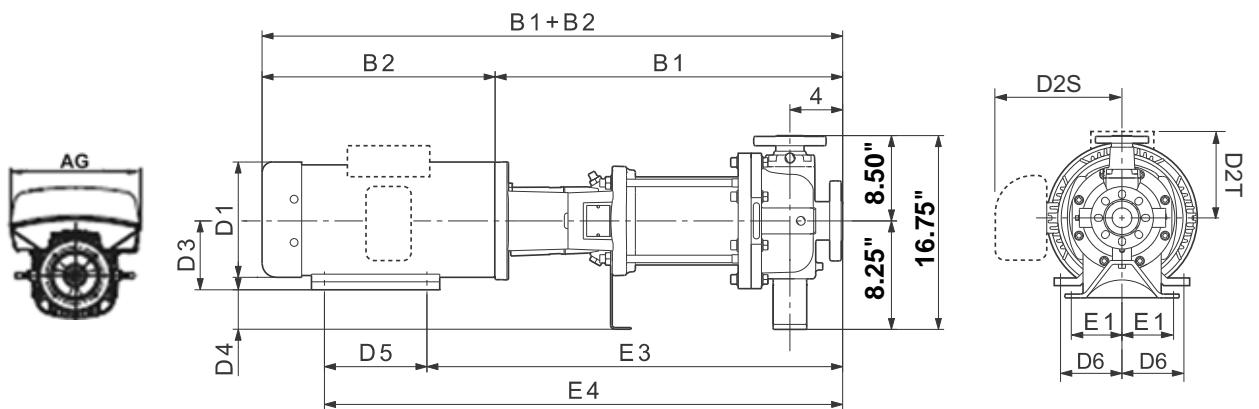


Pump type	HP	PH	Dimensions [in] TEFC									Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
			B1	B1+ B2	E1	E3	E4	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2	
CR(N) 32-1-1 H	5	1	26.00	41.50	4.88	29.75	34.25	10.63	8.00	-	5.25	3.00	4.50	3.75	419	-	-	-	-	-	-	-
		3	26.00	41.50	4.88	29.75	34.25	8.63	5.25	-	4.50	3.75	4.50	3.75	401	-	-	-	-	-	-	-
CR(N)(E) 32-1 H	5	1	26.00	41.50	4.88	29.75	34.25	10.63	8.00	-	5.25	3.00	4.50	3.75	419	-	-	-	-	-	-	-
		3	26.00	41.50	4.88	29.75	34.25	8.63	5.25	-	4.50	3.75	4.50	3.75	401	-	-	-	7.53	7.91	11.46	39.15
CR(N) 32-2-2 H	7 1/2	1	29.25	44.75	4.88	33.75	39.25	10.25	7.63	-	5.25	3.00	5.50	4.25	437	-	-	-	-	-	-	-
		3	29.25	44.75	4.88	33.75	39.25	8.63	5.25	-	5.25	3.00	5.50	4.25	417	-	-	-	7.53	7.91	11.46	43.62
CR(N)(E) 32-2-1 H 7 1/2	7 1/2	1	29.25	44.75	4.88	33.75	39.25	10.25	7.63	-	5.25	3.00	5.50	4.25	437	-	-	-	-	-	-	-
		3	29.25	44.75	4.88	33.75	39.25	8.63	5.25	-	5.25	3.00	5.50	4.25	417	-	-	-	7.53	7.91	11.46	43.62
CR(N) 32-2 H	10	1	29.25	45.38	4.88	33.75	40.75	10.25	10.25	-	5.25	3.00	7.00	4.25	492	-	-	-	-	-	-	-
		3	29.25	44.38	4.88	33.75	40.75	10.25	6.25	-	5.25	3.00	7.00	4.25	440	-	-	-	10.04	9.33	13.62	44.56
CR(N)(E) 32-3-2 H	10	1	32.00	48.13	4.88	36.50	43.50	10.25	10.25	-	5.25	3.00	7.00	4.25	499	-	-	-	-	-	-	-
		3	32.00	47.13	4.88	36.50	43.50	10.25	6.25	-	5.25	3.00	7.00	4.25	447	-	-	-	10.04	9.33	13.62	47.31
CR(N) 32-3 H	15	3	31.50	50.00	4.88	36.50	44.75	12.38	8.00	-	6.25	2.00	8.25	5.00	525	10.63	8.00	49.63	10.04	9.33	13.62	47.48
CR(N)(E) 32-4-2 H	15	3	34.25	52.75	4.88	39.25	47.50	12.38	8.00	-	6.25	2.00	8.25	5.00	532	10.63	8.00	52.38	10.04	9.33	13.62	50.23
CR(N) 32-4 H	20	3	34.25	52.75	4.88	39.25	49.25	12.38	8.00	-	6.25	2.00	10.00	5.00	526	11.50	9.00	52.13	13.39	12.13	16.54	53.03
CR(N)(E) 32-5-2 H	20	3	37.00	55.50	4.88	42.00	52.00	12.38	8.00	-	6.25	2.00	10.00	5.00	533	11.50	9.00	55.00	13.39	12.13	16.54	55.78
CR(N)(E) 32-5 H	20	3	37.00	55.50	4.88	42.00	52.00	12.38	8.00	-	6.25	2.00	10.00	5.00	533	11.50	9.00	55.00	13.39	12.13	16.54	55.78
CR(N) 32-6-2 H	25	3	39.75	62.13	4.88	44.75	54.25	12.38	8.00	-	7.00	1.25	9.50	5.50	599	11.50	11.38	58.88	13.39	12.13	16.54	62.47
CR(N) 32-6 H	25	3	39.75	62.13	4.88	44.75	54.25	12.38	8.00	-	7.00	1.25	9.50	5.50	599	11.50	11.38	58.88	13.39	12.13	16.54	62.47
CR(N) 32-7-2 H	30	3	42.50	64.88	4.88	47.50	58.50	12.38	8.00	-	7.00	1.25	11.00	5.50	632	11.50	11.38	63.13	13.39	12.13	16.54	65.22
CR(N)(E) 32-7 H	30	3	42.50	64.88	4.88	47.50	58.50	12.38	8.00	-	7.00	1.25	11.00	5.50	632	11.50	11.38	63.13	13.39	12.13	16.54	65.22
CR(N)(E) 32-8-2 H	30	3	45.25	67.63	4.88	50.25	61.25	12.38	8.00	-	7.00	1.25	11.00	5.50	645	11.50	11.38	65.88	13.39	12.13	16.54	67.97
CR(N) 32-8 H	40	3	45.25	68.50	4.88	50.25	61.25	15.00	-	13.13	7.00	1.25	11.00	5.50	896	13.25	12.25	66.50	-	-	-	-
CR(N) 32-9-2 H	40	3	48.00	71.25	4.88	53.00	64.00	15.00	-	13.13	7.00	1.25	11.00	5.50	914	13.25	12.25	69.25	-	-	-	-
CR(N) 32-9 H	40	3	48.00	71.25	4.88	53.00	64.00	15.00	-	13.13	7.00	1.25	11.00	5.50	914	13.25	12.25	69.25	-	-	-	-
CR(N) 32-10-2 H	40	3	50.75	74.00	4.88	55.75	66.75	15.00	-	13.13	7.00	1.25	11.00	5.50	920	13.25	12.25	72.00	-	-	-	-
CR(N) 32-10 H	40	3	50.75	74.00	4.88	55.75	66.75	15.00	-	13.13	7.00	1.25	11.00	5.50	920	13.25	12.25	72.00	-	-	-	-
CR(N) 32-11-2 H	50	3	53.50	79.00	4.88	59.00	71.00	16.88	-	14.50	8.00	0.25	12.00	6.25	982	13.25	12.25	75.75	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

CR, CRE, CRN, CRNE 32 H GC/G10/G60

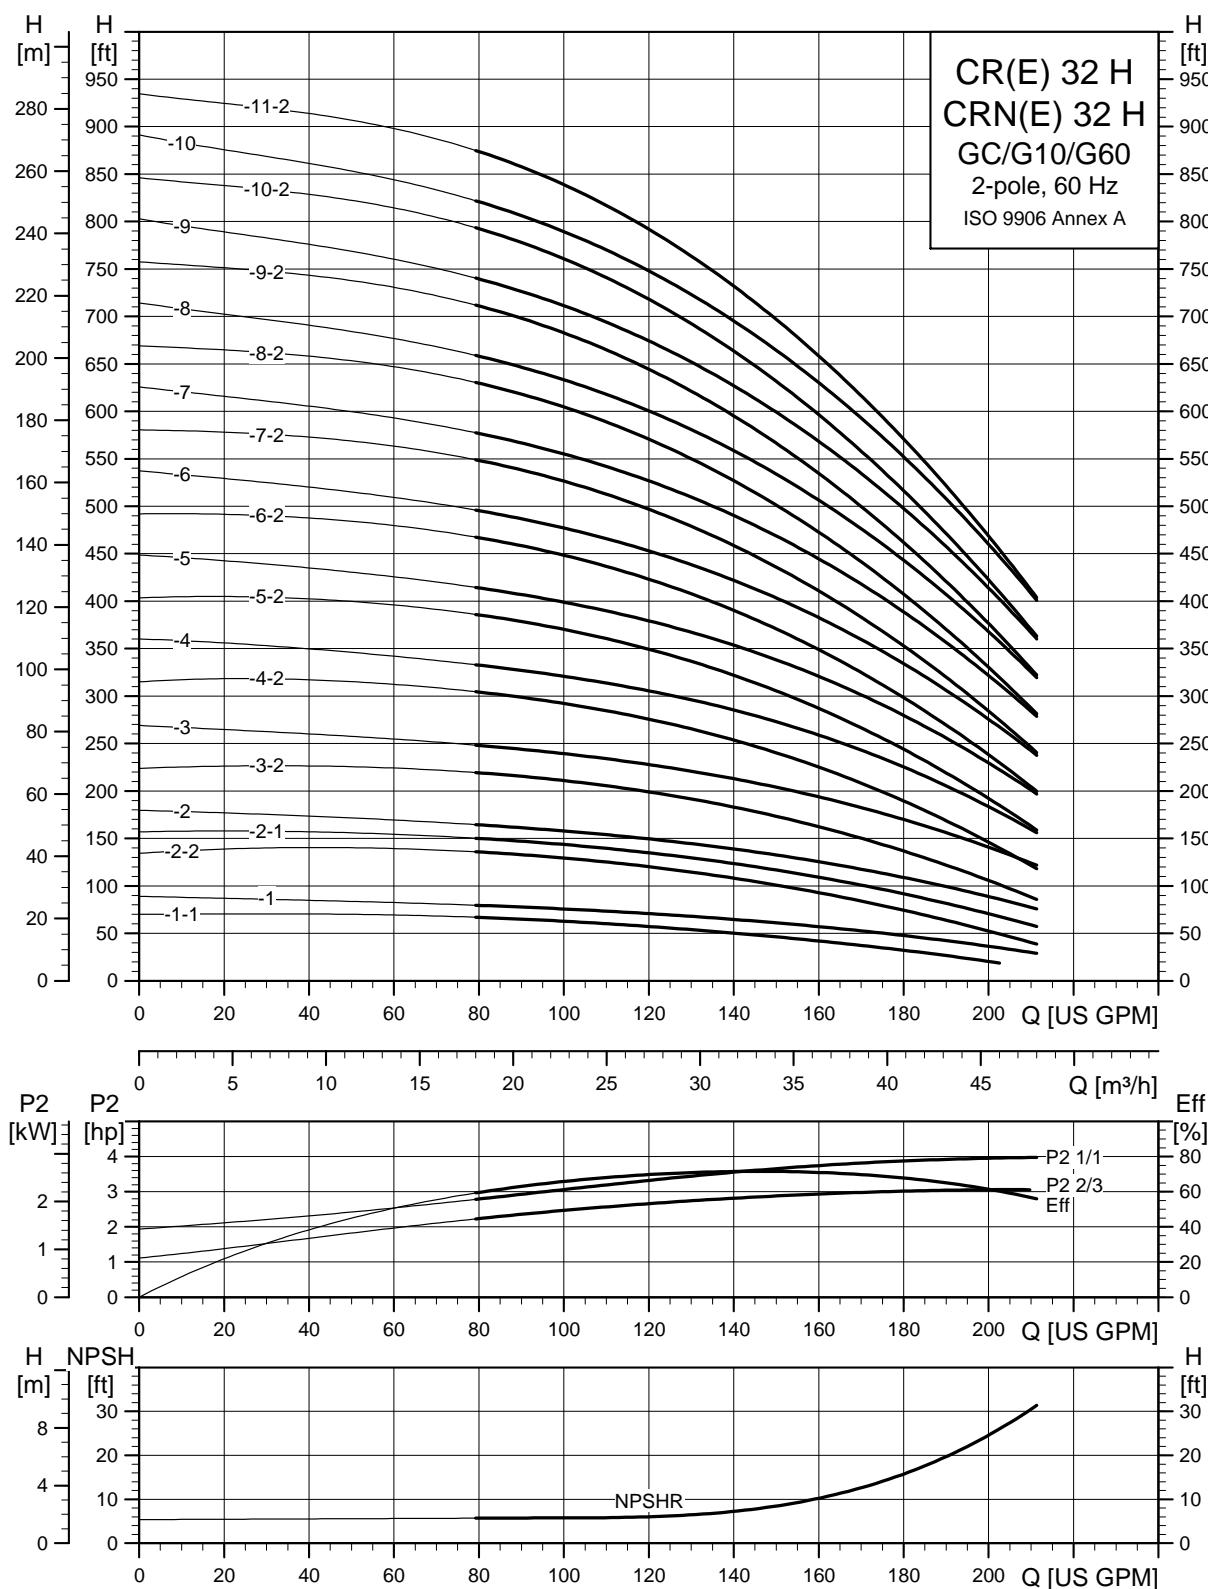

TM04 6294 0912

Dimensions and weights GC (3" x 2" x 6")

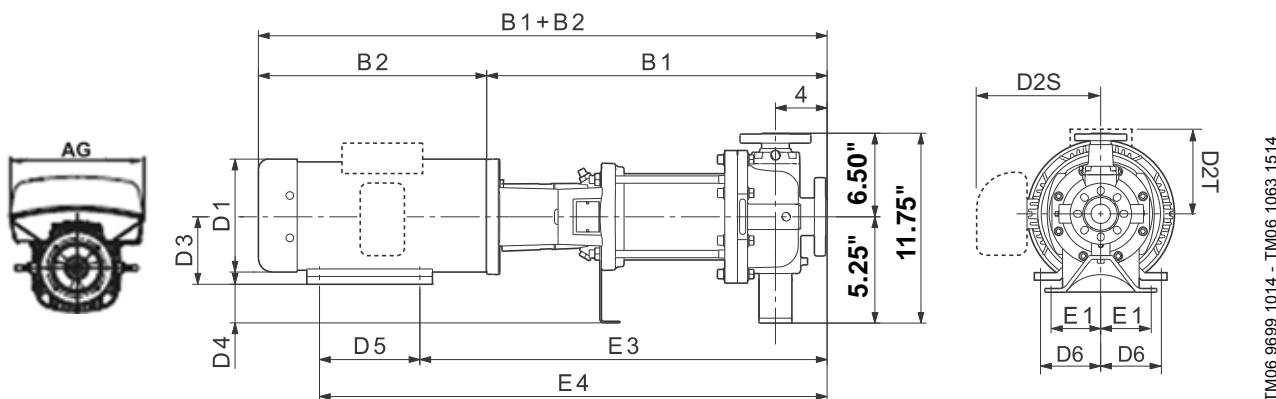


Pump type	HP	PH	Dimensions [in]										Ship. wt. [lbs]	Dimensions [in]			Dimensions [in]			Ship. wt. [lbs]			
			TEFC											ODP			MLE*						
			B1	B1+ B2	E1	E3	E4	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2		
CR(N) 32-1-1 H	5	1	26.00	41.50	3.00	29.75	34.25	10.63	8.00	-	5.25	0.00	4.50	3.75	353	-	-	-	-	-	-	309	
		3	26.00	41.50	3.00	29.75	34.25	8.63	5.25	-	4.50	0.75	4.50	3.75	335	-	-	-	-	-	-		
CR(N)(E) 32-1 H	5	1	26.00	41.50	3.00	29.75	34.25	10.63	8.00	-	5.25	0.00	4.50	3.75	353	-	-	-	-	-	-	309	
		3	26.00	41.50	3.00	29.75	34.25	8.63	5.25	-	4.50	0.75	4.50	3.75	335	-	-	-	7.53	7.91	11.46	39.15	
CR(N) 32-2-2 H	7 1/2	1	29.25	44.75	3.00	33.75	39.25	10.25	7.63	-	5.25	0.00	5.50	4.25	371	-	-	-	7.53	7.91	11.46	43.62	341
		3	29.25	44.75	3.00	33.75	39.25	8.63	5.25	-	5.25	0.00	5.50	4.25	351	-	-	-	7.53	7.91	11.46	43.62	
CR(N)(E) 32-2-1 H	7 1/2	1	29.25	44.75	3.00	33.75	39.25	10.25	7.63	-	5.25	0.00	5.50	4.25	371	-	-	-	-	-	-	341	
		3	29.25	44.75	3.00	33.75	39.25	8.63	5.25	-	5.25	0.00	5.50	4.25	351	-	-	-	7.53	7.91	11.46	43.62	
CR(N) 32-2 H	10	1	29.25	45.38	3.00	33.75	40.75	10.25	10.25	-	5.25	0.00	7.00	4.25	426	-	-	-	-	-	-	343	
		3	29.25	44.38	3.00	33.75	40.75	10.25	6.25	-	5.25	0.00	7.00	4.25	374	-	-	-	10.04	9.33	13.62	44.56	
CR(N)(E) 32-3-2 H	10	1	32.00	48.13	3.00	36.50	43.50	10.25	10.25	-	5.25	0.00	7.00	4.25	453	-	-	-	-	-	-	370	
		3	32.00	47.13	3.00	36.50	43.50	10.25	6.25	-	5.25	0.00	7.00	4.25	400	-	-	-	10.04	9.33	13.62	47.31	
CR(N) 32-3 H	15	3	31.50	50.00	3.00	36.50	44.75	12.38	8.00	-	6.25	-1.00	8.25	5.00	479	10.63	8.00	49.63	10.04	9.33	13.62	47.48	434
CR(N)(E) 32-4-2 H	15	3	34.25	52.75	3.00	39.25	47.50	12.38	8.00	-	6.25	-1.00	8.25	5.00	485	10.63	8.00	52.38	10.04	9.33	13.62	50.23	440
CR(N) 32-4 H	20	3	34.25	52.75	3.00	39.25	49.25	12.38	8.00	-	6.25	-1.00	10.00	5.00	480	11.50	9.00	52.13	13.39	12.13	16.54	53.03	590
CR(N)(E) 32-5-2 H	20	3	37.00	55.50	3.00	42.00	52.00	12.38	8.00	-	6.25	-1.00	10.00	5.00	487	11.50	9.00	55.00	13.39	12.13	16.54	55.78	597
CR(N)(E) 32-5 H	20	3	37.00	55.50	3.00	42.00	52.00	12.38	8.00	-	6.25	-1.00	10.00	5.00	487	11.50	9.00	55.00	13.39	12.13	16.54	55.78	597
CR(N) 32-6-2 H	25	3	39.75	62.13	3.00	44.75	54.25	12.38	8.00	-	7.00	-1.75	9.50	5.50	592	11.50	11.38	58.88	13.39	12.13	16.54	62.47	705
CR(N)(E) 32-6 H	25	3	39.75	62.13	3.00	44.75	54.25	12.38	8.00	-	7.00	-1.75	9.50	5.50	592	11.50	11.38	58.88	13.39	12.13	16.54	62.47	705
CR(N) 32-7-2 H	30	3	42.50	64.88	3.00	47.50	58.50	12.38	8.00	-	7.00	-1.75	11.00	5.50	625	11.50	11.38	63.13	13.39	12.13	16.54	65.22	740
CR(N)(E) 32-7 H	30	3	42.50	64.88	3.00	47.50	58.50	12.38	8.00	-	7.00	-1.75	11.00	5.50	625	11.50	11.38	63.13	13.39	12.13	16.54	65.22	740
CR(N)(E) 32-8-2 H	30	3	45.25	67.63	3.00	50.25	61.25	12.38	8.00	-	7.00	-1.75	11.00	5.50	638	11.50	11.38	65.88	13.39	12.13	16.54	67.97	754
CR(N) 32-8 H	40	3	45.25	68.50	3.00	50.25	61.25	15.00	-	13.13	7.00	-1.75	11.00	5.50	890	13.25	12.25	66.50	-	-	-	-	-
CR(N) 32-9-2 H	40	3	48.00	71.25	3.00	53.00	64.00	15.00	-	13.13	7.00	-1.75	11.00	5.50	907	13.25	12.25	69.25	-	-	-	-	-
CR(N) 32-9 H	40	3	48.00	71.25	3.00	53.00	64.00	15.00	-	13.13	7.00	-1.75	11.00	5.50	907	13.25	12.25	69.25	-	-	-	-	-
CR(N) 32-10-2 H	40	3	50.75	74.00	3.00	55.75	66.75	15.00	-	13.13	7.00	-1.75	11.00	5.50	914	13.25	12.25	72.00	-	-	-	-	-
CR(N) 32-10 H	40	3	50.75	74.00	3.00	55.75	66.75	15.00	-	13.13	7.00	-1.75	11.00	5.50	914	13.25	12.25	72.00	-	-	-	-	-
CR(N) 32-11-2 H	50	3	53.50	79.00	3.00	59.00	71.00	16.88	-	14.50	8.00	-2.75	12.00	6.25	976	13.25	12.25	75.75	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE m

Dimensions shown for three-phase MEL meters are for 100 V versions. See page 16 for 200-230 V, three-phase dimensions.

Dimensions and weights G10 (3" x 2" x 6")

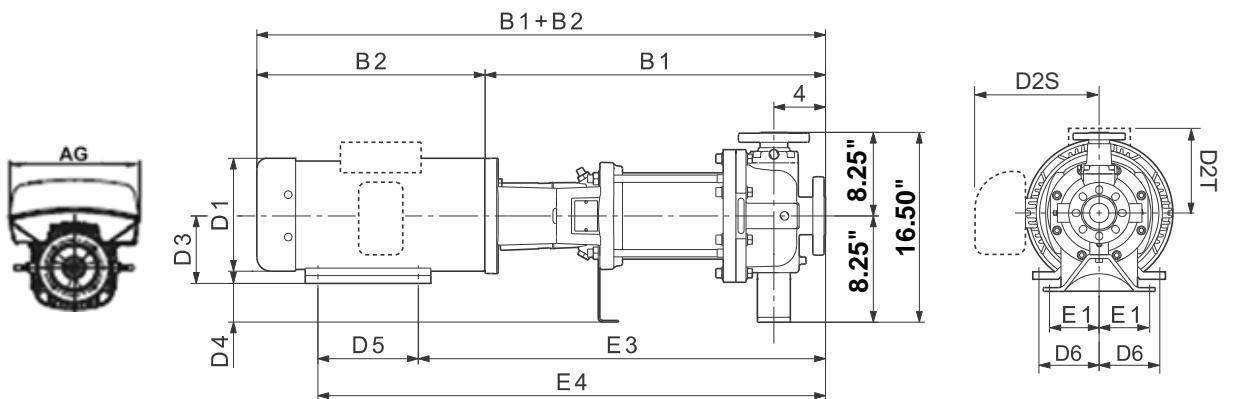


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]		
			B1	B1+ B2	E1	E3	E4	D1	D2T	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2				
			1	26.00	41.50	4.88	29.75	34.25	10.63	8.00	-	5.25	3.00	4.50	3.75	357	-	-	-	-	-	
CR(N) 32-1-1 H	5	1	26.00	41.50	4.88	29.75	34.25	8.63	5.25	-	4.50	3.75	4.50	3.75	340	-	-	-	-	-	-	
CR(N) 32-1-1 H	5	3	26.00	41.50	4.88	29.75	34.25	10.63	8.00	-	5.25	3.00	4.50	3.75	357	-	-	-	-	-	-	
CR(N) 32-1-1 H	5	1	26.00	41.50	4.88	29.75	34.25	8.63	5.25	-	4.50	3.75	4.50	3.75	340	-	-	-	7.53	7.91	11.46	39.15
CR(N) 32-2-2 H	7 1/2	1	29.25	44.75	4.88	33.75	39.25	10.25	7.63	-	5.25	3.00	5.50	4.25	376	-	-	-	-	-	-	-
CR(N) 32-2-2 H	7 1/2	3	29.25	44.75	4.88	33.75	39.25	8.63	5.25	-	5.25	3.00	5.50	4.25	355	-	-	-	7.53	7.91	11.46	43.62
CR(N) 32-2-1 H	7 1/2	1	29.25	44.75	4.88	33.75	39.25	10.25	7.63	-	5.25	3.00	5.50	4.25	376	-	-	-	-	-	-	-
CR(N) 32-2-1 H	7 1/2	3	29.25	44.75	4.88	33.75	39.25	8.63	5.25	-	5.25	3.00	5.50	4.25	355	-	-	-	7.53	7.91	11.46	43.62
CR(N) 32-2 H	10	1	29.25	45.38	4.88	33.75	40.75	10.25	10.25	-	5.25	3.00	7.00	4.25	431	-	-	-	-	-	-	-
CR(N) 32-2 H	10	3	29.25	44.38	4.88	33.75	40.75	10.25	6.25	-	5.25	3.00	7.00	4.25	378	-	-	-	10.04	9.33	13.62	44.56
CR(N) 32-3-2 H	10	1	32.00	48.13	4.88	36.50	43.50	10.25	10.25	-	5.25	3.00	7.00	4.25	457	-	-	-	-	-	-	-
CR(N) 32-3-2 H	10	3	32.00	47.13	4.88	36.50	43.50	10.25	6.25	-	5.25	3.00	7.00	4.25	405	-	-	-	10.04	9.33	13.62	47.31
CR(N) 32-3 H	15	3	31.50	50.00	4.88	36.50	44.75	12.38	8.00	-	6.25	2.00	8.25	5.00	483	10.63	8.00	49.63	10.04	9.33	13.62	47.48
CR(N) 32-4-2 H	15	3	34.25	52.75	4.88	39.25	47.50	12.38	8.00	-	6.25	2.00	8.25	5.00	490	10.63	8.00	52.38	10.04	9.33	13.62	50.23
CR(N) 32-4 H	20	3	34.25	52.75	4.88	39.25	49.25	12.38	8.00	-	6.25	2.00	10.00	5.00	484	11.50	9.00	52.13	13.39	12.13	16.54	53.03
CR(N) 32-5-2 H	20	3	37.00	55.50	4.88	42.00	52.00	12.38	8.00	-	6.25	2.00	10.00	5.00	491	11.50	9.00	55.00	13.39	12.13	16.54	55.78
CR(N) 32-5 H	20	3	37.00	55.50	4.88	42.00	52.00	12.38	8.00	-	6.25	2.00	10.00	5.00	491	11.50	9.00	55.00	13.39	12.13	16.54	55.78
CR(N) 32-6-2 H	25	3	39.75	62.13	4.88	44.75	54.25	12.38	8.00	-	7.00	1.25	9.50	5.50	597	11.50	11.38	58.88	13.39	12.13	16.54	62.47
CR(N) 32-6 H	25	3	39.75	62.13	4.88	44.75	54.25	12.38	8.00	-	7.00	1.25	9.50	5.50	597	11.50	11.38	58.88	13.39	12.13	16.54	62.47
CR(N) 32-7-2 H	30	3	42.50	64.88	4.88	47.50	58.50	12.38	8.00	-	7.00	1.25	11.00	5.50	630	11.50	11.38	63.13	13.39	12.13	16.54	65.22
CR(N) 32-7 H	30	3	42.50	64.88	4.88	47.50	58.50	12.38	8.00	-	7.00	1.25	11.00	5.50	630	11.50	11.38	63.13	13.39	12.13	16.54	65.22
CR(N) 32-8-2 H	30	3	45.25	67.63	4.88	50.25	61.25	12.38	8.00	-	7.00	1.25	11.00	5.50	643	11.50	11.38	65.88	13.39	12.13	16.54	67.97
CR(N) 32-8 H	40	3	45.25	68.50	4.88	50.25	61.25	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	66.50	-	-	-	-
CR(N) 32-9-2 H	40	3	48.00	71.25	4.88	53.00	64.00	15.00	-	13.13	7.00	1.25	11.00	5.50	912	13.25	12.25	69.25	-	-	-	-
CR(N) 32-9 H	40	3	48.00	71.25	4.88	53.00	64.00	15.00	-	13.13	7.00	1.25	11.00	5.50	912	13.25	12.25	69.25	-	-	-	-
CR(N) 32-10-2 H	40	3	50.75	74.00	4.88	55.75	66.75	15.00	-	13.13	7.00	1.25	11.00	5.50	918	13.25	12.25	72.00	-	-	-	-
CR(N) 32-10 H	40	3	50.75	74.00	4.88	55.75	66.75	15.00	-	13.13	7.00	1.25	11.00	5.50	918	13.25	12.25	72.00	-	-	-	-
CR(N) 32-11-2 H	50	3	53.50	79.00	4.88	59.00	71.00	16.88	-	14.50	8.00	0.25	12.00	6.25	980	13.25	12.25	75.75	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

Dimensions and weights G60 (3" x 2" x 8", 3" x 2" x 10")

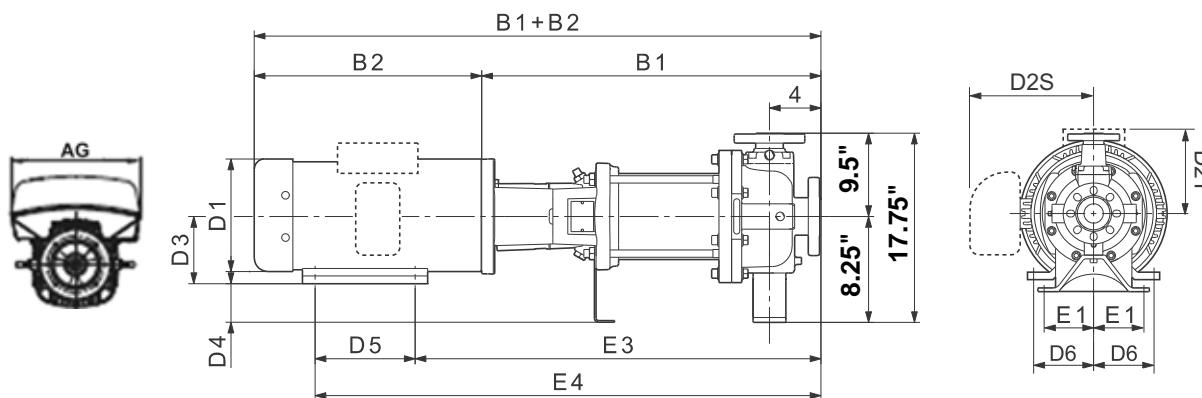


TM0610631514

Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]	
			B1	B1+ B2	E1	E3	E4	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2	
CR(N) 32-1-1 H	5	1	26.00	41.50	4.88	29.75	34.25	10.63	8.00	-	5.25	3.00	4.50	3.75	419	-	-	-	-	-	-	-
		3	26.00	41.50	4.88	29.75	34.25	8.63	5.25	-	4.50	3.75	4.50	3.75	401	-	-	-	-	-	-	-
CR(N)(E) 32-1 H	5	1	26.00	41.50	4.88	29.75	34.25	10.63	8.00	-	5.25	3.00	4.50	3.75	419	-	-	-	-	-	-	-
		3	26.00	41.50	4.88	29.75	34.25	8.63	5.25	-	4.50	3.75	4.50	3.75	401	-	-	-	7.53	7.91	11.46	39.15
CR(N) 32-2-2 H	7 1/2	1	29.25	44.75	4.88	33.75	39.25	10.25	7.63	-	5.25	3.00	5.50	4.25	437	-	-	-	-	-	-	-
		3	29.25	44.75	4.88	33.75	39.25	8.63	5.25	-	5.25	3.00	5.50	4.25	417	-	-	-	7.53	7.91	11.46	43.62
CR(N)(E) 32-2-1 H	7 1/2	1	29.25	44.75	4.88	33.75	39.25	10.25	7.63	-	5.25	3.00	5.50	4.25	437	-	-	-	-	-	-	-
		3	29.25	44.75	4.88	33.75	39.25	8.63	5.25	-	5.25	3.00	5.50	4.25	417	-	-	-	7.53	7.91	11.46	43.62
CR(N) 32-2 H	10	1	29.25	45.38	4.88	33.75	40.75	10.25	10.25	-	5.25	3.00	7.00	4.25	492	-	-	-	-	-	-	-
		3	29.25	44.38	4.88	33.75	40.75	10.25	6.25	-	5.25	3.00	7.00	4.25	440	-	-	-	10.04	9.33	13.62	44.56
CR(N)(E) 32-3-2 H	10	1	32.00	48.13	4.88	36.50	43.50	10.25	10.25	-	5.25	3.00	7.00	4.25	499	-	-	-	-	-	-	-
		3	32.00	47.13	4.88	36.50	43.50	10.25	6.25	-	5.25	3.00	7.00	4.25	447	-	-	-	10.04	9.33	13.62	47.31
CR(N) 32-3 H	15	3	31.50	50.00	4.88	36.50	44.75	12.38	8.00	-	6.25	2.00	8.25	5.00	525	10.63	8.00	49.63	10.04	9.33	13.62	47.48
CR(N)(E) 32-4-2 H	15	3	34.25	52.75	4.88	39.25	47.50	12.38	8.00	-	6.25	2.00	8.25	5.00	532	10.63	8.00	52.38	10.04	9.33	13.62	50.23
CR(N) 32-4 H	20	3	34.25	52.75	4.88	39.25	49.25	12.38	8.00	-	6.25	2.00	10.00	5.00	526	11.50	9.00	52.13	13.39	12.13	16.54	53.03
CR(N)(E) 32-5-2 H	20	3	37.00	55.50	4.88	42.00	52.00	12.38	8.00	-	6.25	2.00	10.00	5.00	533	11.50	9.00	55.00	13.39	12.13	16.54	55.78
CR(N)(E) 32-5 H	20	3	37.00	55.50	4.88	42.00	52.00	12.38	8.00	-	6.25	2.00	10.00	5.00	533	11.50	9.00	55.00	13.39	12.13	16.54	55.78
CR(N) 32-6-2 H	25	3	39.75	62.13	4.88	44.75	54.25	12.38	8.00	-	7.00	1.25	9.50	5.50	597	11.50	11.38	58.88	13.39	12.13	16.54	62.47
CR(N)(E) 32-6 H	25	3	39.75	62.13	4.88	44.75	54.25	12.38	8.00	-	7.00	1.25	9.50	5.50	597	11.50	11.38	58.88	13.39	12.13	16.54	62.47
CR(N) 32-7-2 H	30	3	42.50	64.88	4.88	47.50	58.50	12.38	8.00	-	7.00	1.25	11.00	5.50	630	11.50	11.38	63.13	13.39	12.13	16.54	65.22
CR(N)(E) 32-7 H	30	3	42.50	64.88	4.88	47.50	58.50	12.38	8.00	-	7.00	1.25	11.00	5.50	630	11.50	11.38	63.13	13.39	12.13	16.54	65.22
CR(N)(E) 32-8-2 H	30	3	45.25	67.63	4.88	50.25	61.25	12.38	8.00	-	7.00	1.25	11.00	5.50	645	11.50	11.38	65.88	13.39	12.13	16.54	67.97
CR(N) 32-8 H	40	3	45.25	68.50	4.88	50.25	61.25	15.00	-	13.13	7.00	1.25	11.00	5.50	896	13.25	12.25	66.50	-	-	-	-
CR(N) 32-9-2 H	40	3	48.00	71.25	4.88	53.00	64.00	15.00	-	13.13	7.00	1.25	11.00	5.50	912	13.25	12.25	69.25	-	-	-	-
CR(N) 32-9 H	40	3	48.00	71.25	4.88	53.00	64.00	15.00	-	13.13	7.00	1.25	11.00	5.50	912	13.25	12.25	69.25	-	-	-	-
CR(N) 32-10-2 H	40	3	50.75	74.00	4.88	55.75	66.75	15.00	-	13.13	7.00	1.25	11.00	5.50	918	13.25	12.25	72.00	-	-	-	-
CR(N) 32-10 H	40	3	50.75	74.00	4.88	55.75	66.75	15.00	-	13.13	7.00	1.25	11.00	5.50	918	13.25	12.25	72.00	-	-	-	-
CR(N) 32-11-2 H	50	3	53.50	79.00	4.88	59.00	71.00	16.88	-	14.50	8.00	0.25	12.00	6.25	980	13.25	12.25	75.75	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.


Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

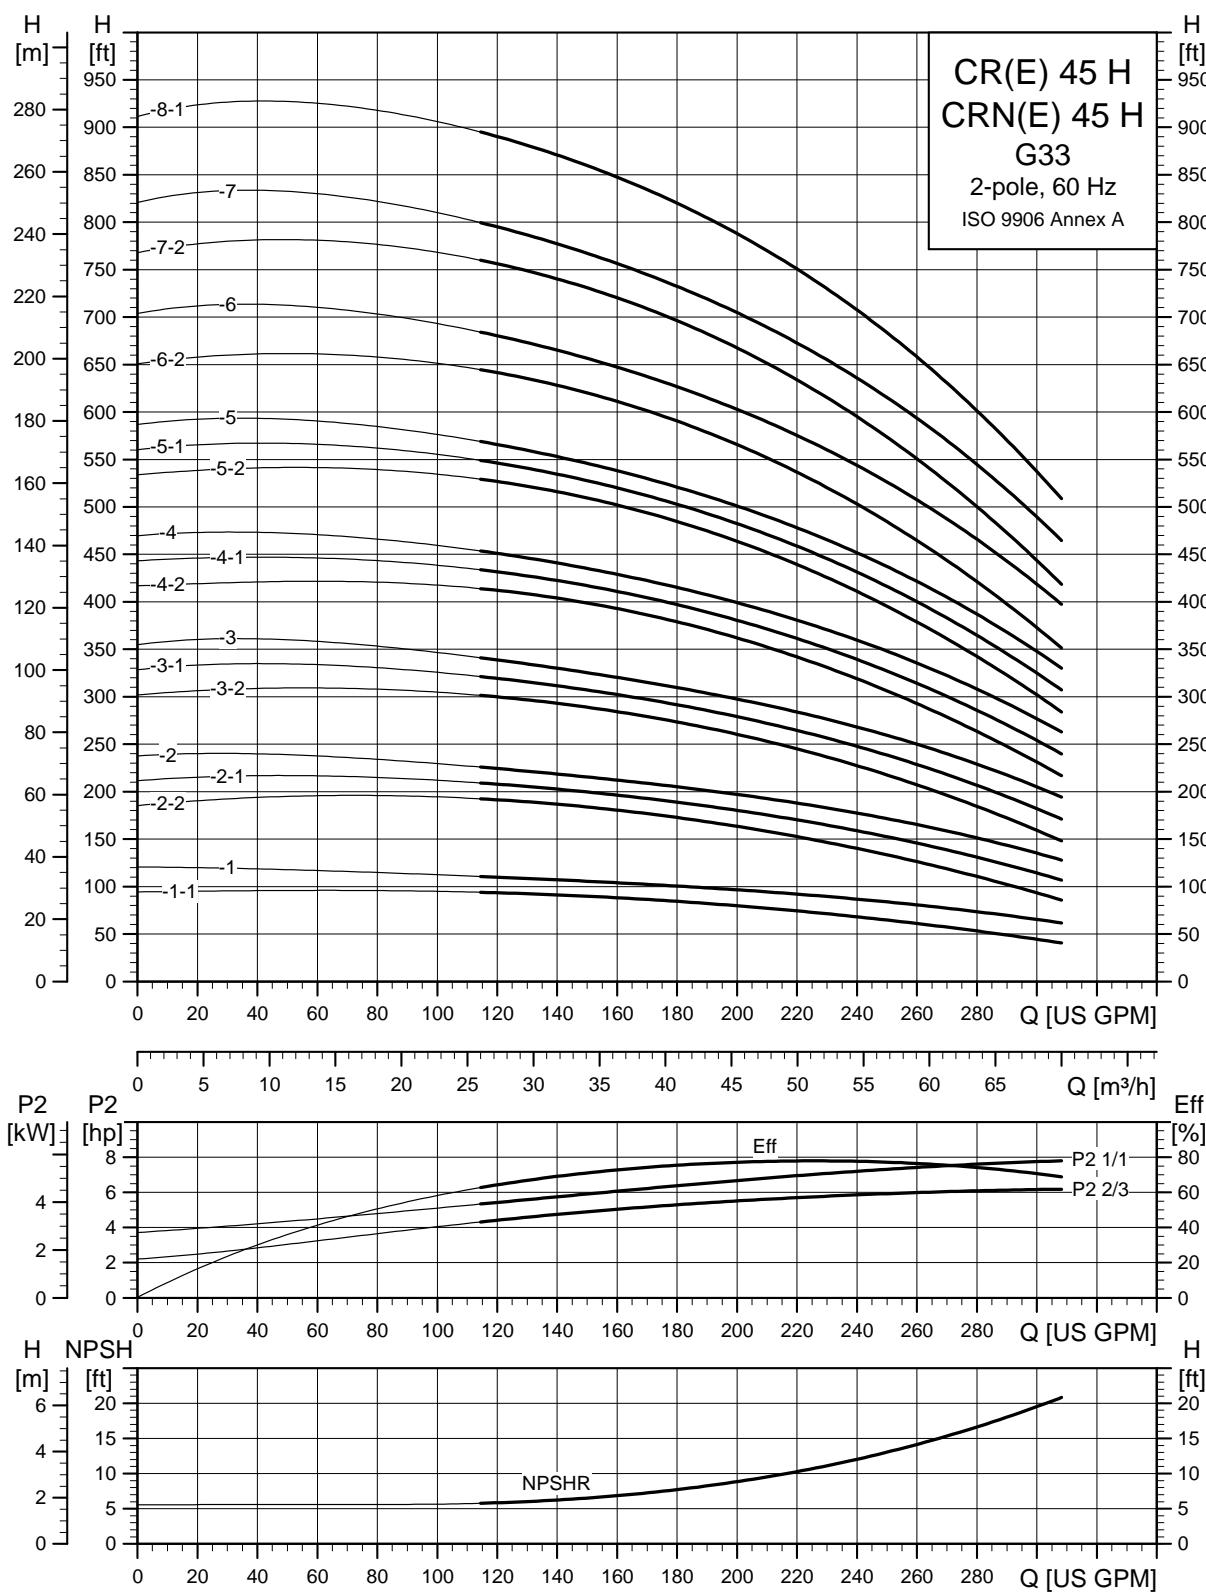CR, CRE, CRN, CRNE 45 H G33

TM04 6298 0912

Dimensions and weights G33 (3" x 3")

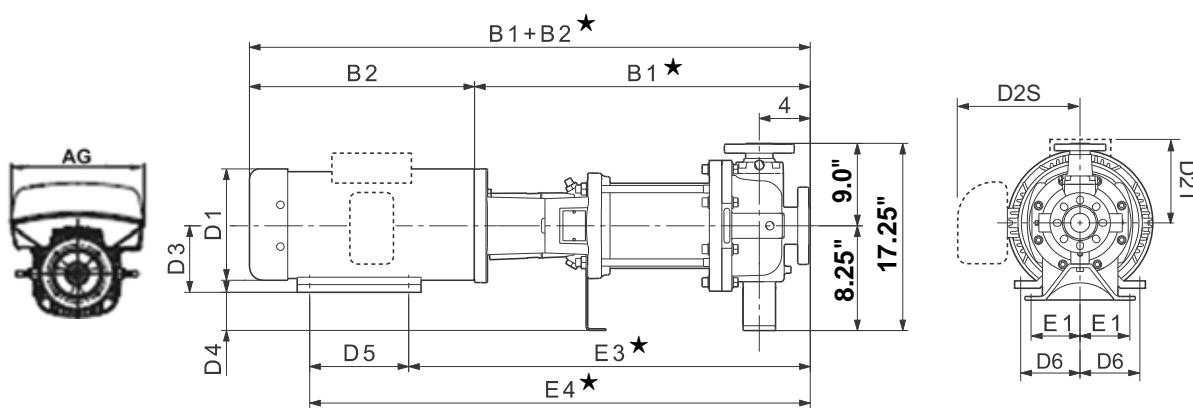


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
			B1 ★	B1+ B2 ★	E1	E3 ★	E4 ★	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	AG	B1+ B2 ★					
CR(N)(E) 45-1-1 H 7 1/2	1	26.13	41.63	4.88	30.63	36.13	10.25	7.63	-	5.25	3.00	5.50	4.25	301	-	-	-	-	-	-			
	3	26.13	41.63	4.88	30.63	36.13	8.63	5.25	-	5.25	3.00	5.50	4.25	280	-	-	-	7.53	7.91	11.46	40.50	271	
CR(N)(E) 45-1 H	10	1	26.13	42.13	4.88	30.63	37.63	10.25	10.25	-	5.25	3.00	7.00	4.25	356	-	-	-	-	-	-	-	
	3	26.13	41.25	4.88	30.63	37.63	10.25	6.25	-	5.25	3.00	7.00	4.25	304	-	-	-	10.04	9.33	13.62	41.44	273	
CR(N)(E) 45-2-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	389	10.63	8.00	46.88	10.04	9.33	13.62	44.73	343
CR(N) 45-2-1 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	389	10.63	8.00	46.88	10.04	9.33	13.62	44.73	343
CR(N)(E) 45-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	389	10.63	8.00	46.88	10.04	9.33	13.62	44.73	343
CR(N)(E) 45-3-2 H	20	3	31.88	50.38	4.88	36.88	46.88	12.38	8.00	-	6.25	2.00	10.00	5.00	410	11.50	9.00	49.88	13.39	12.13	16.54	50.66	520
CR(N) 45-3-1 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	1.25	9.50	5.50	438	11.50	11.38	51.00	13.39	12.13	16.54	54.60	551
CR(N)(E) 45-3 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	1.25	9.50	5.50	438	11.50	11.38	51.00	13.39	12.13	16.54	54.60	551
CR(N)(E) 45-4-2 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	542	11.50	11.38	55.63	13.39	12.13	16.54	57.72	657
CR(N) 45-4-1 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	542	11.50	11.38	55.63	13.39	12.13	16.54	57.72	657
CR(N)(E) 45-4 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	542	11.50	11.38	55.63	13.39	12.13	16.54	57.72	657
CR(N) 45-5-2 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	802	13.25	12.25	59.38	-	-	-	-	-
CR(N) 45-5-1 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	802	13.25	12.25	59.38	-	-	-	-	-
CR(N) 45-5 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	802	13.25	12.25	59.38	-	-	-	-	-
CR(N) 45-6-2 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	0.25	12.00	6.25	870	13.25	12.25	63.50	-	-	-	-	-
CR(N) 45-6 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	0.25	12.00	6.25	870	13.25	12.25	63.50	-	-	-	-	-
CR(N) 45-7-2 H	50	3	44.50	69.88	4.88	50.00	62.00	16.88	-	14.50	8.00	0.25	12.00	6.25	888	13.25	12.25	66.63	-	-	-	-	-
CR(N) 45-7 H	60	3	44.50	71.88	4.88	50.63	62.88	16.88	-	14.63	9.00	-0.75	12.25	7.00	1162	15.13	13.25	68.50	-	-	-	-	-
CR(N) 45-8-1 H	60	3	47.63	75.00	4.88	53.75	66.00	16.88	-	14.63	9.00	-0.75	12.25	7.00	1173	15.13	13.25	71.75	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.


★ Add 0.67 inches for CRN-H dimensions.

CR, CRE, CRN, CRNE 45 H GB/G20/G50

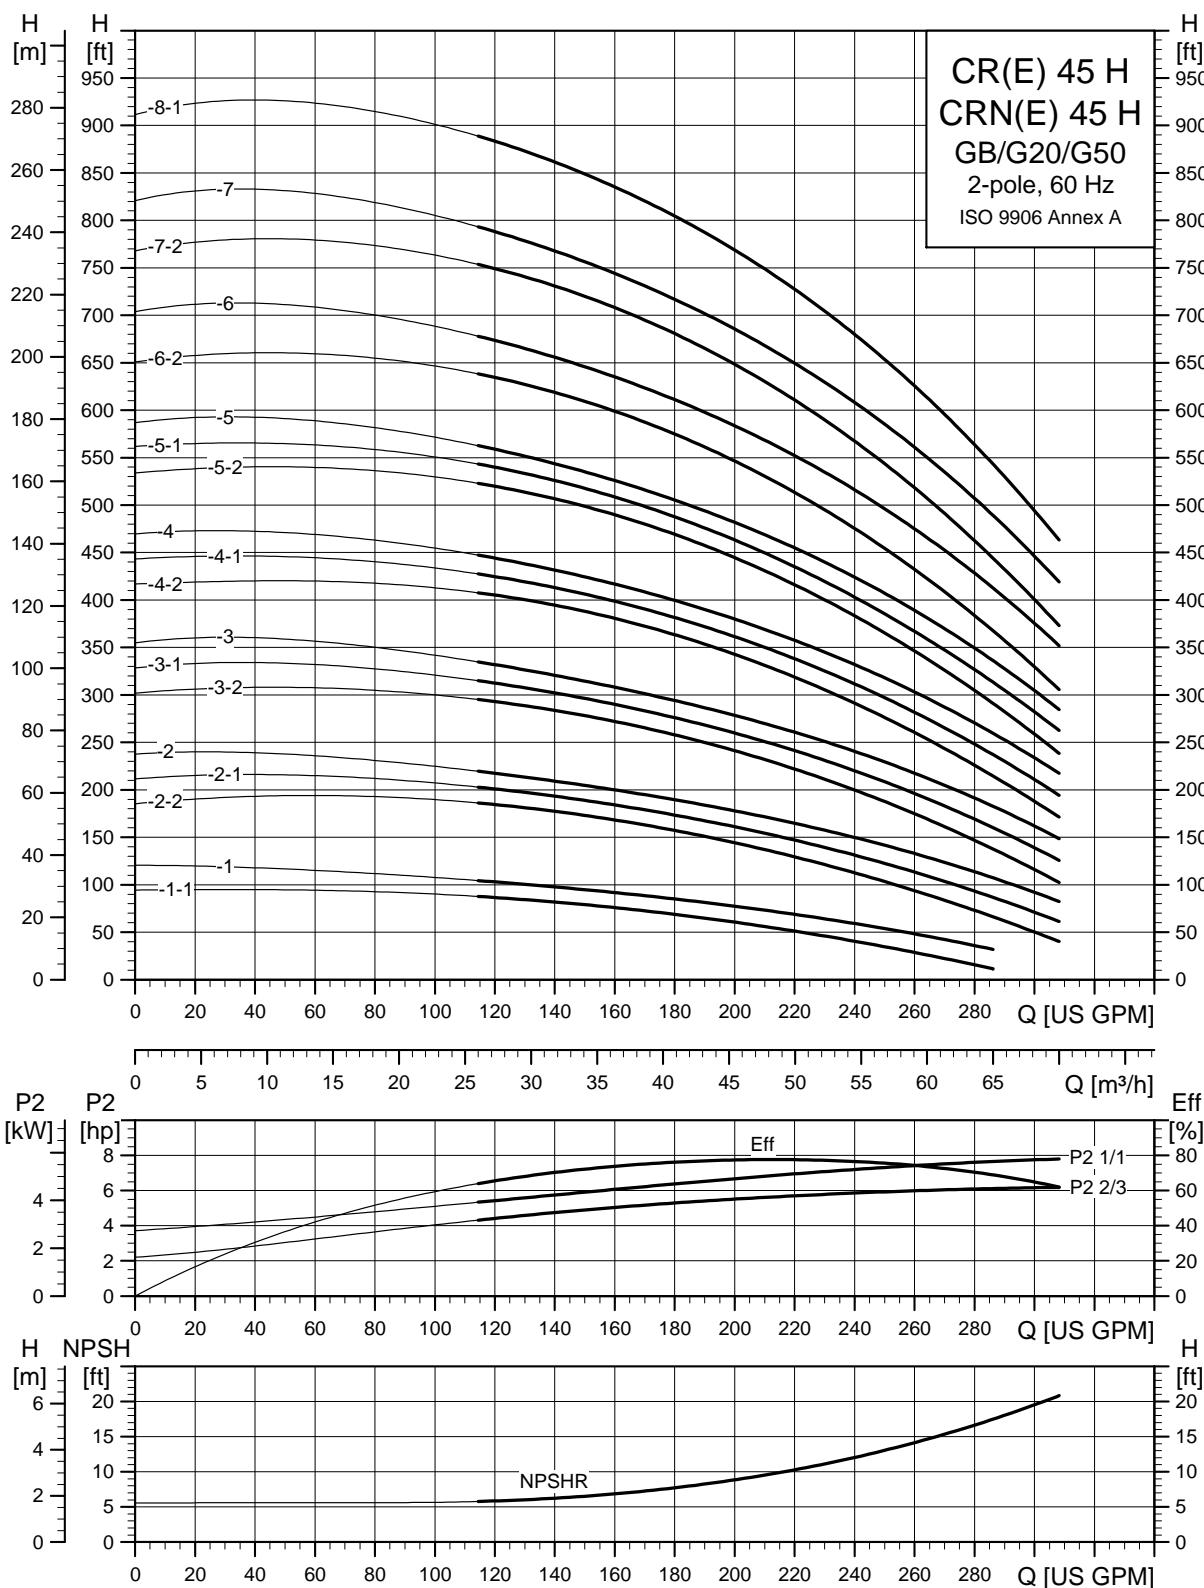

TM04 6296 0912

Dimensions and weights GB (3" x 1.5" x 6", 3" x 1.5" x 8")

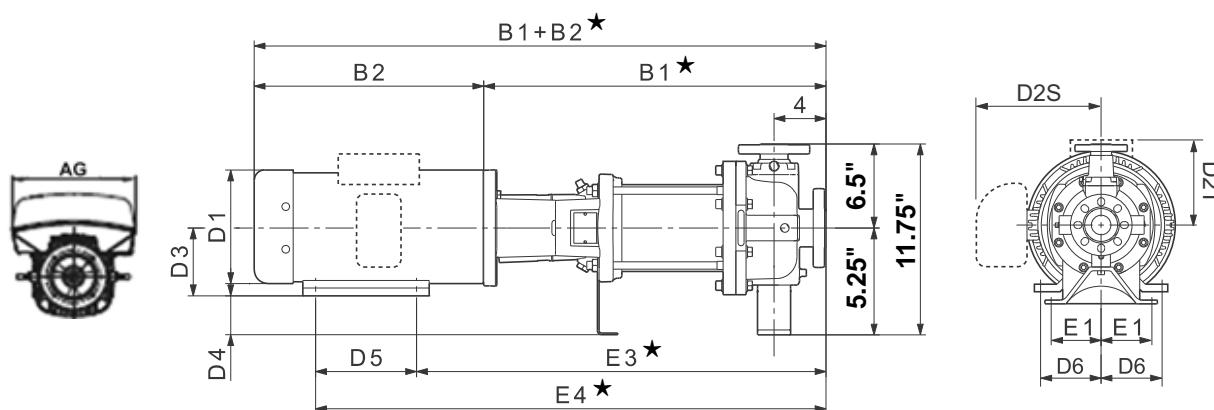

TM06 9699 1014 - TM06 1063 1514


Pump type	HP PH	Dimensions [in] TEFC								Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]					
		B1★	B1+ B2★	E1	E3★	E4★	D1	D2T	D3	D4	D5	D6	D1	D2	B1+ B2★	D1	D2	AG	B1+ B2★				
CR(N)(E) 45-1-1 H 7 1/2	1	27.38	42.88	3.00	31.88	37.38	10.25	7.63	-	5.25	0.00	5.50	4.25	301	-	-	-	-	-	-			
	3	27.38	42.88	3.00	31.88	37.38	8.63	5.25	-	5.25	0.00	5.50	4.25	280	-	-	-	7.53	7.91	11.46	41.75	271	
CR(N)(E) 45-1 H	10	1	27.38	43.38	3.00	31.88	38.88	10.25	10.25	-	5.25	0.00	7.00	4.25	356	-	-	-	-	-	-	-	273
	3	27.38	42.50	3.00	31.88	38.88	10.25	6.25	-	5.25	0.00	7.00	4.25	304	-	-	-	10.04	9.33	13.62	42.69	273	
CR(N)(E) 45-2-2 H	15	3	30.00	48.50	3.00	35.00	43.25	12.38	8.00	-	6.25	-1.00	8.25	5.00	389	10.63	8.00	48.13	10.04	9.33	13.62	45.98	343
CR(N) 45-2-1 H	15	3	30.00	48.50	3.00	35.00	43.25	12.38	8.00	-	6.25	-1.00	8.25	5.00	389	10.63	8.00	48.13	10.04	9.33	13.62	45.98	343
CR(N)(E) 45-2 H	15	3	30.00	48.50	3.00	35.00	43.25	12.38	8.00	-	6.25	-1.00	8.25	5.00	389	10.63	8.00	48.13	10.04	9.33	13.62	45.98	343
CR(N)(E) 45-3-2 H	20	3	33.13	51.63	3.00	38.13	48.13	12.38	8.00	-	6.25	-1.00	10.00	5.00	410	11.50	9.00	51.13	13.39	12.13	16.54	51.91	520
CR(N) 45-3-1 H	25	3	33.13	55.50	3.00	38.13	47.63	12.38	8.00	-	7.00	-1.75	9.50	5.50	438	11.50	11.38	52.25	13.39	12.13	16.54	55.85	551
CR(N)(E) 45-3 H	25	3	33.13	55.50	3.00	38.13	47.63	12.38	8.00	-	7.00	-1.75	9.50	5.50	440	11.50	11.38	52.25	13.39	12.13	16.54	55.85	553
CR(N)(E) 45-4-2 H	30	3	36.25	58.63	3.00	41.25	52.25	12.38	8.00	-	7.00	-1.75	11.00	5.50	542	11.50	11.38	56.88	13.39	12.13	16.54	58.97	657
CR(N) 45-4-1 H	30	3	36.25	58.63	3.00	41.25	52.25	12.38	8.00	-	7.00	-1.75	11.00	5.50	542	11.50	11.38	56.88	13.39	12.13	16.54	58.97	657
CR(N)(E) 45-4 H	30	3	36.25	58.63	3.00	41.25	52.25	12.38	8.00	-	7.00	-1.75	11.00	5.50	542	11.50	11.38	56.88	13.39	12.13	16.54	58.97	657
CR(N) 45-5-2 H	40	3	39.50	62.63	3.00	44.50	55.50	15.00	-	13.13	7.00	-1.75	11.00	5.50	802	13.25	12.25	60.63	-	-	-	-	-
CR(N) 45-5-1 H	40	3	39.50	62.63	3.00	44.50	55.50	15.00	-	13.13	7.00	-1.75	11.00	5.50	802	13.25	12.25	60.63	-	-	-	-	-
CR(N) 45-5 H	40	3	39.50	62.63	3.00	44.50	55.50	15.00	-	13.13	7.00	-1.75	11.00	5.50	802	13.25	12.25	60.63	-	-	-	-	-
CR(N) 45-6-2 H	50	3	42.63	68.00	3.00	48.13	60.13	16.88	-	14.50	8.00	-2.75	12.00	6.25	870	13.25	12.25	64.75	-	-	-	-	-
CR(N) 45-6 H	50	3	42.63	68.00	3.00	48.13	60.13	16.88	-	14.50	8.00	-2.75	12.00	6.25	870	13.25	12.25	64.75	-	-	-	-	-
CR(N) 45-7-2 H	50	3	45.75	71.13	3.00	51.25	63.25	16.88	-	14.50	8.00	-2.75	12.00	6.25	888	13.25	12.25	67.88	-	-	-	-	-
CR(N) 45-7 H	60	3	45.75	73.13	3.00	51.88	64.13	16.88	-	14.63	9.00	-3.75	12.25	7.00	1164	15.13	13.25	69.75	-	-	-	-	-
CR(N) 45-8-1 H	60	3	48.88	76.25	3.00	55.00	67.25	16.88	-	14.63	9.00	-3.75	12.25	7.00	1173	15.13	13.25	73.00	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

★ Add 0.16 inches for CRN-H dimensions.

Dimensions and weights G20 (3" x 1.5" x 13")

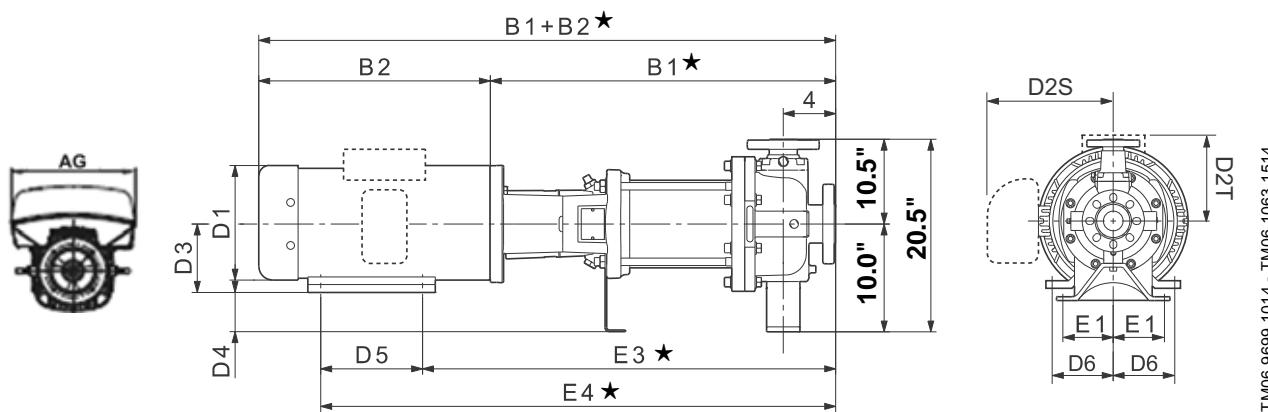


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]		
			B1 ★	B1+ B2 ★	E1	E3 ★	E4 ★	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+ B2 ★	D1	D2	AG	B1+ B2 ★	
CR(N)(E) 45-1-1 H	7 1/2	1	26.13	41.63	4.88	30.63	36.13	10.25	7.63	-	5.25	4.75	5.50	4.25	442	-	-	-	-	-	-	-
		3	26.13	41.63	4.88	30.63	36.13	8.63	5.25	-	5.25	4.75	5.50	4.25	421	-	-	-	7.53	7.91	11.46	40.50
CR(N)(E) 45-1 H	10	1	26.13	42.13	4.88	30.63	37.63	10.25	10.25	-	5.25	4.75	7.00	4.25	497	-	-	-	-	-	-	-
		3	26.13	41.25	4.88	30.63	37.63	10.25	6.25	-	5.25	4.75	7.00	4.25	444	-	-	-	10.04	9.33	13.62	41.44
CR(N)(E) 45-2-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	3.75	8.25	5.00	532	10.63	8.00	46.88	10.04	9.33	13.62	44.73
CR(N) 45-2-1 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	3.75	8.25	5.00	532	10.63	8.00	46.88	10.04	9.33	13.62	44.73
CR(N)(E) 45-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	3.75	8.25	5.00	532	10.63	8.00	46.88	10.04	9.33	13.62	44.73
CR(N)(E) 45-3-2 H	20	3	31.88	50.38	4.88	36.88	46.88	12.38	8.00	-	6.25	3.75	10.00	5.00	533	11.50	9.00	49.88	13.39	12.13	16.54	50.66
CR(N) 45-3-1 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	3.00	9.50	5.50	561	11.50	11.38	51.00	13.39	12.13	16.54	54.60
CR(N)(E) 45-3 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	3.00	9.50	5.50	561	11.50	11.38	51.00	13.39	12.13	16.54	54.60
CR(N)(E) 45-4-2 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	3.00	11.00	5.50	623	11.50	11.38	55.63	13.39	12.13	16.54	57.72
CR(N) 45-4-1 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	3.00	11.00	5.50	623	11.50	11.38	55.63	13.39	12.13	16.54	57.72
CR(N)(E) 45-4 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	3.00	11.00	5.50	623	11.50	11.38	55.63	13.39	12.13	16.54	57.72
CR(N) 45-5-2 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	3.00	11.00	5.50	887	13.25	12.25	59.38	-	-	-	-
CR(N) 45-5-1 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	3.00	11.00	5.50	887	13.25	12.25	59.38	-	-	-	-
CR(N) 45-5 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	3.00	11.00	5.50	887	13.25	12.25	59.38	-	-	-	-
CR(N) 45-6-2 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	2.00	12.00	6.25	956	13.25	12.25	63.50	-	-	-	-
CR(N) 45-6 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	2.00	12.00	6.25	956	13.25	12.25	63.50	-	-	-	-
CR(N) 45-7-2 H	50	3	44.50	69.88	4.88	50.00	62.00	16.88	-	14.50	8.00	2.00	12.00	6.25	976	13.25	12.25	66.63	-	-	-	-
CR(N) 45-7 H	60	3	44.50	71.88	4.88	50.63	62.88	16.88	-	14.63	9.00	1.00	12.25	7.00	1250	15.13	13.25	68.50	-	-	-	-
CR(N) 45-8-1 H	60	3	47.63	75.00	4.88	53.75	66.00	16.88	-	14.63	9.00	1.00	12.25	7.00	1259	15.13	13.25	71.75	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

★ Add 0.67 inches for CRN-H dimensions.

Dimensions and weights G50 (3" x 1.5" x 8", 3" x 1.5" x 10")

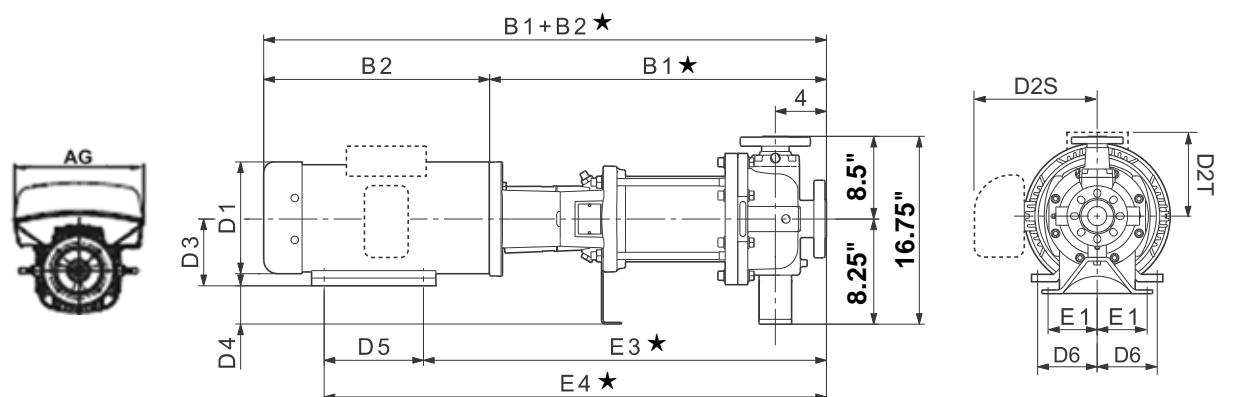


Pump type	HP	PH	Dimensions [in] TEFC								Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]	
			B1★	B1+B2★	E1	E3★	E4★	D1	D2T	D3	D4	D5	D6	D1	D2	AG	B1+B2★		
CR(N)(E) 45-1-1 H 7 1/2	1	26.13	41.63	4.88	30.63	36.13	10.25	7.63	-	5.25	3.00	5.50	4.25	448	-	-	-	-	
	3	26.13	41.63	4.88	30.63	36.13	8.63	5.25	-	5.25	3.00	5.50	4.25	428	-	-	-	7.53 7.91 11.46 40.50 418	
CR(N)(E) 45-1 H	10	1	26.13	42.13	4.88	30.63	37.63	10.25	10.25	-	5.25	3.00	7.00	4.25	503	-	-	-	-
	3	26.13	41.25	4.88	30.63	37.63	10.25	6.25	-	5.25	3.00	7.00	4.25	451	-	-	-	10.04 9.33 13.62 41.44 420	
CR(N)(E) 45-2-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	538	10.63	8.00	46.88	10.04 9.33 13.62 44.73 493
CR(N)(E) 45-2-1 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	538	10.63	8.00	46.88	10.04 9.33 13.62 44.73 493
CR(N)(E) 45-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	538	10.63	8.00	46.88	10.04 9.33 13.62 44.73 493
CR(N)(E) 45-3-2 H	20	3	31.88	50.38	4.88	36.88	46.88	12.38	8.00	-	6.25	2.00	10.00	5.00	542	11.50	9.00	49.88	13.39 12.13 16.54 50.66 652
CR(N)(E) 45-3-1 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	1.25	9.50	5.50	570	11.50	11.38	51.00	13.39 12.13 16.54 54.60 683
CR(N)(E) 45-3 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	1.25	9.50	5.50	570	11.50	11.38	51.00	13.39 12.13 16.54 54.60 683
CR(N)(E) 45-4-2 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	630	11.50	11.38	55.63	13.39 12.13 16.54 57.72 745
CR(N)(E) 45-4-1 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	630	11.50	11.38	55.63	13.39 12.13 16.54 57.72 745
CR(N)(E) 45-4 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	630	11.50	11.38	55.63	13.39 12.13 16.54 57.72 745
CR(N)(E) 45-5-2 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	59.38	- - - -
CR(N)(E) 45-5-1 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	59.38	- - - -
CR(N)(E) 45-5 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	59.38	- - - -
CR(N)(E) 45-6-2 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	0.25	12.00	6.25	963	13.25	12.25	63.50	- - - -
CR(N)(E) 45-6 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	0.25	12.00	6.25	963	13.25	12.25	63.50	- - - -
CR(N)(E) 45-7-2 H	50	3	44.50	69.88	4.88	50.00	62.00	16.88	-	14.50	8.00	0.25	12.00	6.25	980	13.25	12.25	66.63	- - - -
CR(N)(E) 45-7 H	60	3	44.50	71.88	4.88	50.63	62.88	16.88	-	14.63	9.00	-0.75	12.25	7.00	1254	15.13	13.25	68.50	- - - -
CR(N)(E) 45-8-1 H	60	3	47.63	75.00	4.88	53.75	66.00	16.88	-	14.63	9.00	-0.75	12.25	7.00	1265	15.13	13.25	71.75	- - - -

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

★ Add 0.67 inches for CRN-H dimensions.

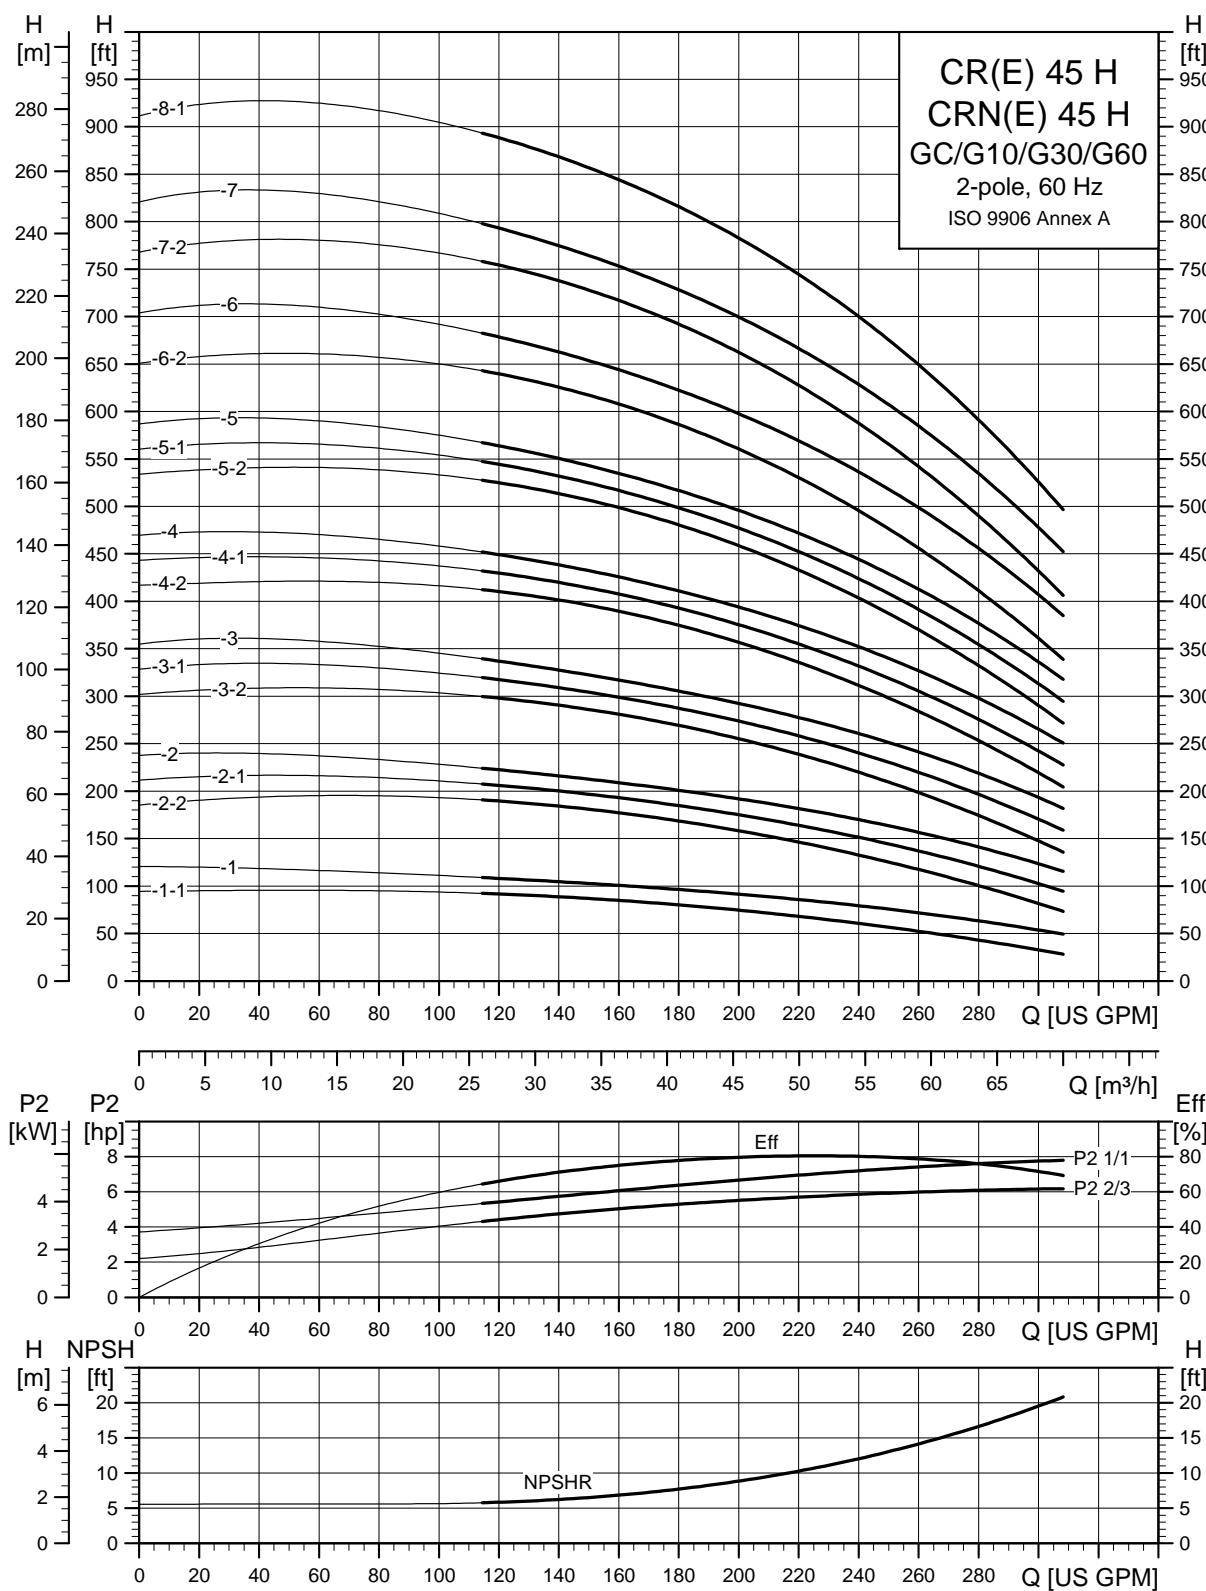CR, CRE, CRN, CRNE 45 H GC/G10/G30/G60

TM04 6297 0912

Dimensions and weights GC (3" x 2" x 6")

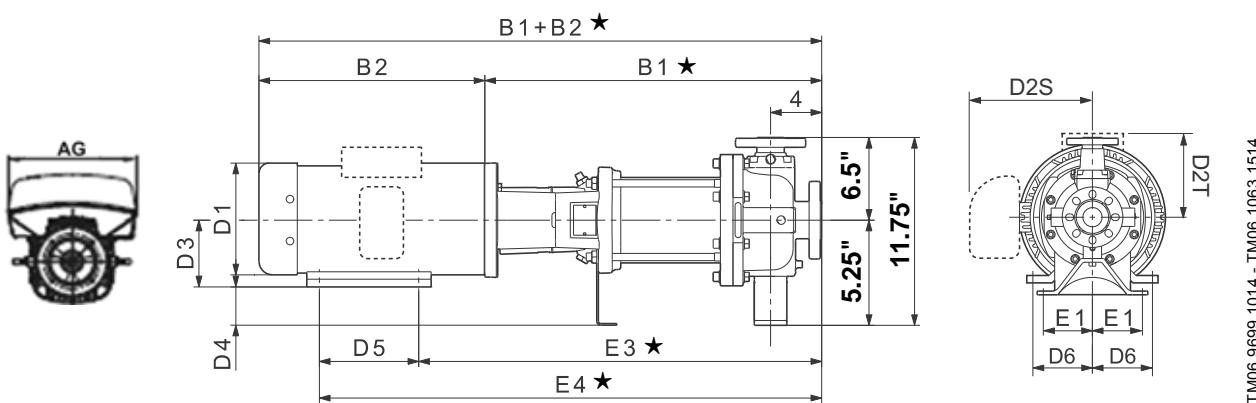


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
			B1★	B1+B2★	E1	E3★	E4★	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+B2★	D1	D2	AG	B1+B2★		
CR(N)(E) 45-1-1 H 7 1/2	1	27.38	42.88	3.00	31.88	37.38	10.25	7.63	-	5.25	0	5.50	4.25	301	-	-	-	-	-	-	-	-	
	3	27.38	42.88	3.00	31.88	37.38	8.63	5.25	-	5.25	0	5.50	4.25	280	-	-	-	7.53	7.91	11.46	41.75	271	
CR(N)(E) 45-1 H	10	1	27.38	43.38	3.00	31.88	38.88	10.25	10.25	-	5.25	0	7.00	4.25	356	-	-	-	-	-	-	-	-
	3	27.38	42.50	3.00	31.88	38.88	10.25	6.25	-	5.25	0	7.00	4.25	304	-	-	-	10.04	9.33	13.62	42.69	273	
CR(N)(E) 45-2-2 H	15	3	30.00	48.50	3.00	35.00	43.25	12.38	8.00	-	6.25	-1.00	8.25	5.00	389	10.63	8.00	48.13	10.04	9.33	13.62	45.98	343
CR(N) 45-2-1 H	15	3	30.00	48.50	3.00	35.00	43.25	12.38	8.00	-	6.25	-1.00	8.25	5.00	389	10.63	8.00	48.13	10.04	9.33	13.62	45.98	343
CR(N)(E) 45-2 H	15	3	30.00	48.50	3.00	35.00	43.25	12.38	8.00	-	6.25	-1.00	8.25	5.00	389	10.63	8.00	48.13	10.04	9.33	13.62	45.98	343
CR(N)(E) 45-3-2 H	20	3	33.13	51.63	3.00	38.13	48.13	12.38	8.00	-	6.25	-1.00	10.00	5.00	410	11.50	9.00	51.13	13.39	12.13	16.54	51.91	520
CR(N) 45-3-1 H	25	3	33.13	55.50	3.00	38.13	47.63	12.38	8.00	-	7.00	-1.75	9.50	5.50	438	11.50	11.38	52.25	13.39	12.13	16.54	55.85	551
CR(N)(E) 45-3 H	25	3	33.13	55.50	3.00	38.13	47.63	12.38	8.00	-	7.00	-1.75	9.50	5.50	440	11.50	11.38	52.25	13.39	12.13	16.54	55.85	553
CR(N)(E) 45-4-2 H	30	3	36.25	58.63	3.00	41.25	52.25	12.38	8.00	-	7.00	-1.75	11.00	5.50	542	11.50	11.38	56.88	13.39	12.13	16.54	58.97	657
CR(N) 45-4-1 H	30	3	36.25	58.63	3.00	41.25	52.25	12.38	8.00	-	7.00	-1.75	11.00	5.50	542	11.50	11.38	56.88	13.39	12.13	16.54	58.97	657
CR(N)(E) 45-4 H	30	3	36.25	58.63	3.00	41.25	52.25	12.38	8.00	-	7.00	-1.75	11.00	5.50	542	11.50	11.38	56.88	13.39	12.13	16.54	58.97	657
CR(N) 45-5-2 H	40	3	39.50	62.63	3.00	44.50	55.50	15.00	-	13.13	7.00	-1.75	11.00	5.50	802	13.25	12.25	60.63	-	-	-	-	-
CR(N) 45-5-1 H	40	3	39.50	62.63	3.00	44.50	55.50	15.00	-	13.13	7.00	-1.75	11.00	5.50	802	13.25	12.25	60.63	-	-	-	-	-
CR(N) 45-5 H	40	3	39.50	62.63	3.00	44.50	55.50	15.00	-	13.13	7.00	-1.75	11.00	5.50	802	13.25	12.25	60.63	-	-	-	-	-
CR(N) 45-6-2 H	50	3	42.63	68.00	3.00	48.13	60.13	16.88	-	14.50	8.00	-2.75	12.00	6.25	870	13.25	12.25	64.75	-	-	-	-	-
CR(N) 45-6 H	50	3	42.63	68.00	3.00	48.13	60.13	16.88	-	14.50	8.00	-2.75	12.00	6.25	870	13.25	12.25	64.75	-	-	-	-	-
CR(N) 45-7-2 H	50	3	45.75	71.13	3.00	51.25	63.25	16.88	-	14.50	8.00	-2.75	12.00	6.25	888	13.25	12.25	67.88	-	-	-	-	-
CR(N) 45-7 H	60	3	45.75	73.13	3.00	51.88	64.13	16.88	-	14.63	9.00	-3.75	12.25	7.00	1164	15.13	13.25	69.75	-	-	-	-	-
CR(N) 45-8-1 H	60	3	48.88	76.25	3.00	55.00	67.25	16.88	-	14.63	9.00	-3.75	12.25	7.00	1173	15.13	13.25	73.00	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

★ Add 0.16 inches for CRN-H dimensions.

Dimensions and weights G10 (3" x 2" x 6")

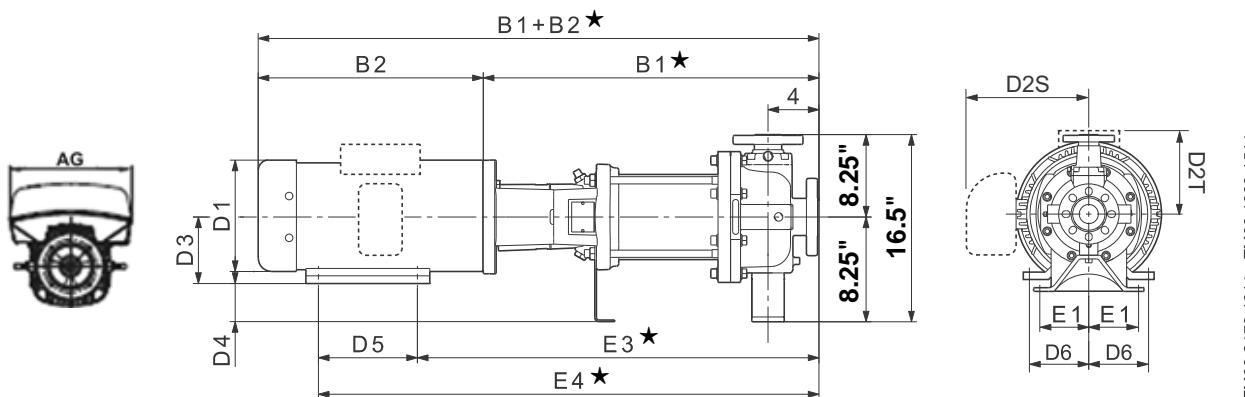

TM086 2478 1014 - TM086 1063 1514


Pump type	HP	PH	Dimensions [in] TEFC												Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]	
			B1 ★	B1+ B2 ★	E1	E3 ★	E4 ★	D1	D2T	D2S	D3	D4	D5	D6		D1	D2	B1+ B2 ★	D1	D2	AG	B1+ B2 ★	
CR(N)(E) 45-1-1 H	1	26.13	41.63	4.88	30.63	36.13	10.25	7.63	-	5.25	3.00	5.50	4.25	389	-	-	-	-	-	-	-	-	
		3	26.13	41.63	4.88	30.63	36.13	8.63	5.25	-	5.25	3.00	5.50	4.25	368	-	-	-	7.53	7.91	11.46	40.50	359
CR(N)(E) 45-1 H	10	1	26.13	42.13	4.88	30.63	37.63	10.25	10.25	-	5.25	3.00	7.00	4.25	444	-	-	-	-	-	-	-	-
		3	26.13	41.25	4.88	30.63	37.63	10.25	6.25	-	5.25	3.00	7.00	4.25	392	-	-	-	10.04	9.33	13.62	41.44	361
CR(N)(E) 45-2-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	479	10.63	8.00	46.88	10.04	9.33	13.62	44.73	434
CR(N) 45-2-1 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	479	10.63	8.00	46.88	10.04	9.33	13.62	44.73	434
CR(N)(E) 45-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	479	10.63	8.00	46.88	10.04	9.33	13.62	44.73	434
CR(N)(E) 45-3-2 H	20	3	31.88	50.38	4.88	36.88	46.88	12.38	8.00	-	6.25	2.00	10.00	5.00	500	11.50	9.00	49.88	13.39	12.13	16.54	50.66	610
CR(N) 45-3-1 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	1.25	9.50	5.50	528	11.50	11.38	51.00	13.39	12.13	16.54	54.60	641
CR(N)(E) 45-3 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	1.25	9.50	5.50	528	11.50	11.38	51.00	13.39	12.13	16.54	54.60	641
CR(N)(E) 45-4-2 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	632	11.50	11.38	55.63	13.39	12.13	16.54	57.72	747
CR(N)(E) 45-4-1 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	632	11.50	11.38	55.63	13.39	12.13	16.54	57.72	747
CR(N)(E) 45-4 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	632	11.50	11.38	55.63	13.39	12.13	16.54	57.72	747
CR(N) 45-5-2 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	59.38	-	-	-	-	-
CR(N) 45-5-1 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	59.38	-	-	-	-	-
CR(N) 45-5 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	59.38	-	-	-	-	-
CR(N) 45-6-2 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	0.25	12.00	6.25	965	13.25	12.25	63.50	-	-	-	-	-
CR(N) 45-6 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	0.25	12.00	6.25	965	13.25	12.25	63.50	-	-	-	-	-
CR(N) 45-7-2 H	50	3	44.50	69.88	4.88	50.00	62.00	16.88	-	14.50	8.00	0.25	12.00	6.25	982	13.25	12.25	66.63	-	-	-	-	-
CR(N) 45-7 H	60	3	44.50	71.88	4.88	50.63	62.88	16.88	-	14.63	9.00	-0.75	12.25	7.00	1266	15.13	13.25	68.50	-	-	-	-	-
CR(N) 45-8-1 H	60	3	47.63	75.00	4.88	53.75	66.00	16.88	-	14.63	9.00	-0.75	12.25	7.00	1265	15.13	13.25	71.75	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

★ Add 0.67 inches for **CRN-H** dimensions.

Dimensions and weights sketches G30 (3" x 2" x 13")

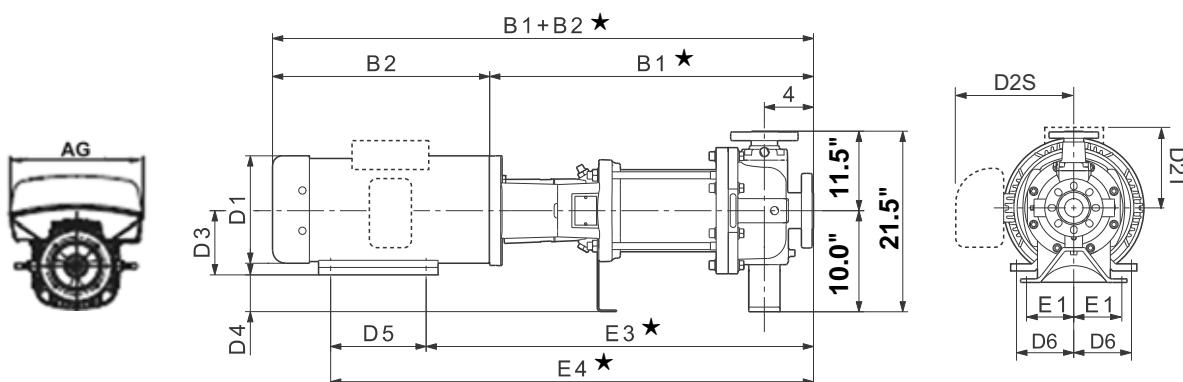

TM06 9699 1014 - TM06 1063 154


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]				
			B1 ★	B1+ B2 ★	E1	E3 ★	E4 ★	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+ B2 ★	D1	D2	AG	B1+ B2 ★			
			1	26.13	41.63	4.88	30.63	36.13	10.25	7.63	-	5.25	4.75	5.50	4.25	470	-	-	-	-	-	-		
CR(N)(E) 45-1-1 H	7	1/2	1	26.13	41.63	4.88	30.63	36.13	8.63	5.25	-	5.25	4.75	5.50	4.25	450	-	-	-	7.53	7.91	11.46	40.50	440
CR(N)(E) 45-1 H	10		1	26.13	42.13	4.88	30.63	37.63	10.25	10.25	-	5.25	4.75	7.00	4.25	525	-	-	-	-	-	-	-	-
CR(N)(E) 45-2 H	15	3	26.13	41.25	4.88	30.63	37.63	10.25	6.25	-	5.25	4.75	7.00	4.25	473	-	-	-	10.04	9.33	13.62	41.44	442	
CR(N)(E) 45-2-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	3.75	8.25	5.00	560	10.63	8.00	46.88	10.04	9.33	13.62	44.73	515	
CR(N) 45-2-1 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	3.75	8.25	5.00	560	10.63	8.00	46.88	10.04	9.33	13.62	44.73	515	
CR(N)(E) 45-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	3.75	8.25	5.00	560	10.63	8.00	46.88	10.04	9.33	13.62	44.73	515	
CR(N)(E) 45-3-2 H	20	3	31.88	50.38	4.88	36.88	46.88	12.38	8.00	-	6.25	3.75	10.00	5.00	561	11.50	9.00	49.88	13.39	12.13	16.54	50.66	672	
CR(N)(E) 45-3-1 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	3.00	9.50	5.50	590	11.50	11.38	51.00	13.39	12.13	16.54	54.60	703	
CR(N)(E) 45-3 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	3.00	9.50	5.50	590	11.50	11.38	51.00	13.39	12.13	16.54	54.60	703	
CR(N)(E) 45-4-2 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	3.00	11.00	5.50	623	11.50	11.38	55.63	13.39	12.13	16.54	57.72	738	
CR(N) 45-4-1 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	3.00	11.00	5.50	623	11.50	11.38	55.63	13.39	12.13	16.54	57.72	738	
CR(N)(E) 45-4 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	3.00	11.00	5.50	623	11.50	11.38	55.63	13.39	12.13	16.54	57.72	738	
CR(N) 45-5-2 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	3.00	11.00	5.50	887	13.25	12.25	59.38	-	-	-	-	-	
CR(N) 45-5-1 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	3.00	11.00	5.50	887	13.25	12.25	59.38	-	-	-	-	-	
CR(N) 45-5 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	3.00	11.00	5.50	887	13.25	12.25	59.38	-	-	-	-	-	
CR(N) 45-6-2 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	2.00	12.00	6.25	956	13.25	12.25	63.50	-	-	-	-	-	
CR(N) 45-6 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	2.00	12.00	6.25	956	13.25	12.25	63.50	-	-	-	-	-	
CR(N) 45-7-2 H	50	3	44.50	69.88	4.88	50.00	62.00	16.88	-	14.50	8.00	2.00	12.00	6.25	974	13.25	12.25	66.63	-	-	-	-	-	
CR(N) 45-7 H	60	3	44.50	71.88	4.88	50.63	62.88	16.88	-	14.63	9.00	1.00	12.25	7.00	1248	15.13	13.25	68.50	-	-	-	-	-	
CR(N) 45-8-1 H	60	3	47.63	75.00	4.88	53.75	66.00	16.88	-	14.63	9.00	1.00	12.25	7.00	1259	15.13	13.25	71.75	-	-	-	-	-	

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

★ Add 0.67 inches for CRN-H dimensions.

Dimensions and weights G60 (3" x 2" x 8", 3" x 2" x 10")

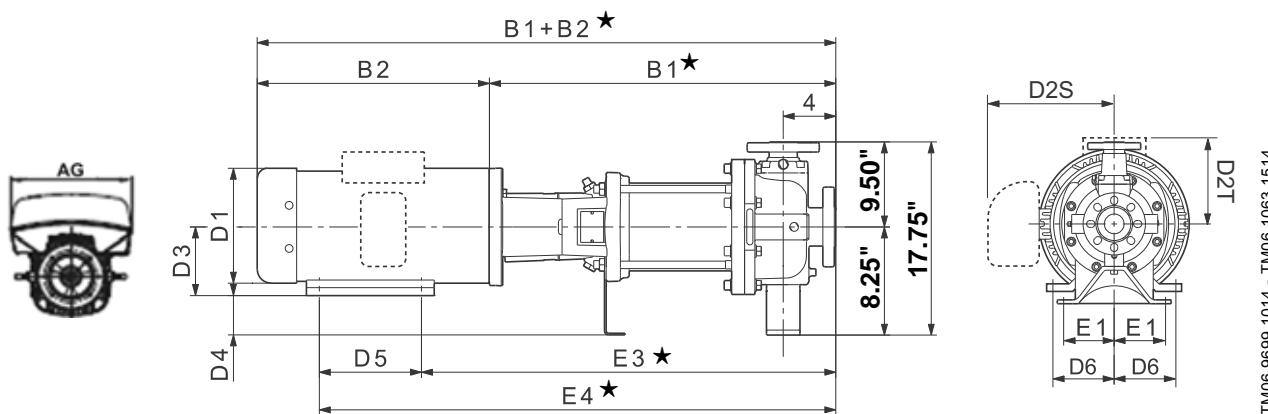

TM06 9699 1014 - TM06 1063 1514


Pump type	HP	PH	Dimensions [in]												Ship. wt. [lbs]	Dimensions [in]		Dimensions [in]			Ship. wt. [lbs]		
			TEFC														ODP		MLE*				
			B1 ★	B1+ B2 ★	E1	E3 ★	E4 ★	D1	D2T	D2S	D3	D4	D5	D6		D1	D2	B1+ B2 ★	D1	D2	AG	B1+ B2 ★	
CR(N)(E) 45-1-1 H	1	7 1/2	26.13	41.63	4.88	30.63	36.13	10.25	7.63	-	5.25	3.00	5.50	4.25	450	-	-	-	-	-	-	-	
			3	26.13	41.63	4.88	30.63	36.13	8.63	5.25	-	5.25	3.00	5.50	4.25	430	-	-	-	7.53	7.91	11.46	40.50
CR(N)(E) 45-1 H	10		26.13	42.13	4.88	30.63	37.63	10.25	10.25	-	5.25	3.00	7.00	4.25	505	-	-	-	-	-	-	-	-
			3	26.13	41.25	4.88	30.63	37.63	10.25	6.25	-	5.25	3.00	7.00	4.25	453	-	-	-	10.04	9.33	13.62	41.44
CR(N)(E) 45-2-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	540	10.63	8.00	46.88	10.04	9.33	13.62	44.73	495
CR(N) 45-2-1 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	540	10.63	8.00	46.88	10.04	9.33	13.62	44.73	495
CR(N)(E) 45-2 H	15	3	28.75	47.25	4.88	33.75	42.00	12.38	8.00	-	6.25	2.00	8.25	5.00	540	10.63	8.00	46.88	10.04	9.33	13.62	44.73	495
CR(N)(E) 45-3-2 H	20	3	31.88	50.38	4.88	36.88	46.88	12.38	8.00	-	6.25	2.00	10.00	5.00	542	11.50	9.00	49.88	13.39	12.13	16.54	50.66	652
CR(N) 45-3-1 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	1.25	9.50	5.50	570	11.50	11.38	51.00	13.39	12.13	16.54	54.60	683
CR(N)(E) 45-3 H	25	3	31.88	54.25	4.88	36.88	46.38	12.38	8.00	-	7.00	1.25	9.50	5.50	570	11.50	11.38	51.00	13.39	12.13	16.54	54.60	683
CR(N)(E) 45-4-2 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	632	11.50	11.38	55.63	13.39	12.13	16.54	57.72	747
CR(N)(E) 45-4-1 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	632	11.50	11.38	55.63	13.39	12.13	16.54	57.72	747
CR(N)(E) 45-4 H	30	3	35.00	57.38	4.88	40.00	51.00	12.38	8.00	-	7.00	1.25	11.00	5.50	632	11.50	11.38	55.63	13.39	12.13	16.54	57.72	747
CR(N) 45-5-2 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	59.38	-	-	-	-	-
CR(N) 45-5-1 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	59.38	-	-	-	-	-
CR(N) 45-5 H	40	3	38.13	61.38	4.88	43.13	54.13	15.00	-	13.13	7.00	1.25	11.00	5.50	894	13.25	12.25	59.38	-	-	-	-	-
CR(N) 45-6-2 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	0.25	12.00	6.25	965	13.25	12.25	63.50	-	-	-	-	-
CR(N) 45-6 H	50	3	41.38	66.75	4.88	46.88	58.88	16.88	-	14.50	8.00	0.25	12.00	6.25	965	13.25	12.25	63.50	-	-	-	-	-
CR(N) 45-7-2 H	50	3	44.50	69.88	4.88	50.00	62.00	16.88	-	14.50	8.00	0.25	12.00	6.25	982	13.25	12.25	66.63	-	-	-	-	-
CR(N) 45-7 H	60	3	44.50	71.88	4.88	50.63	62.88	16.88	-	14.63	9.00	-0.75	12.25	7.00	1256	15.13	13.25	68.50	-	-	-	-	-
CR(N) 45-8-1 H	60	3	47.63	75.00	4.88	53.75	66.00	16.88	-	14.63	9.00	-0.75	12.25	7.00	1265	15.13	13.25	71.75	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions. See page 19 for 200-240 V, three-phase dimensions.

★ Add 0.67 inches for CRN-H dimensions.

CR, CRE, CRN, CRNE 64 H G44

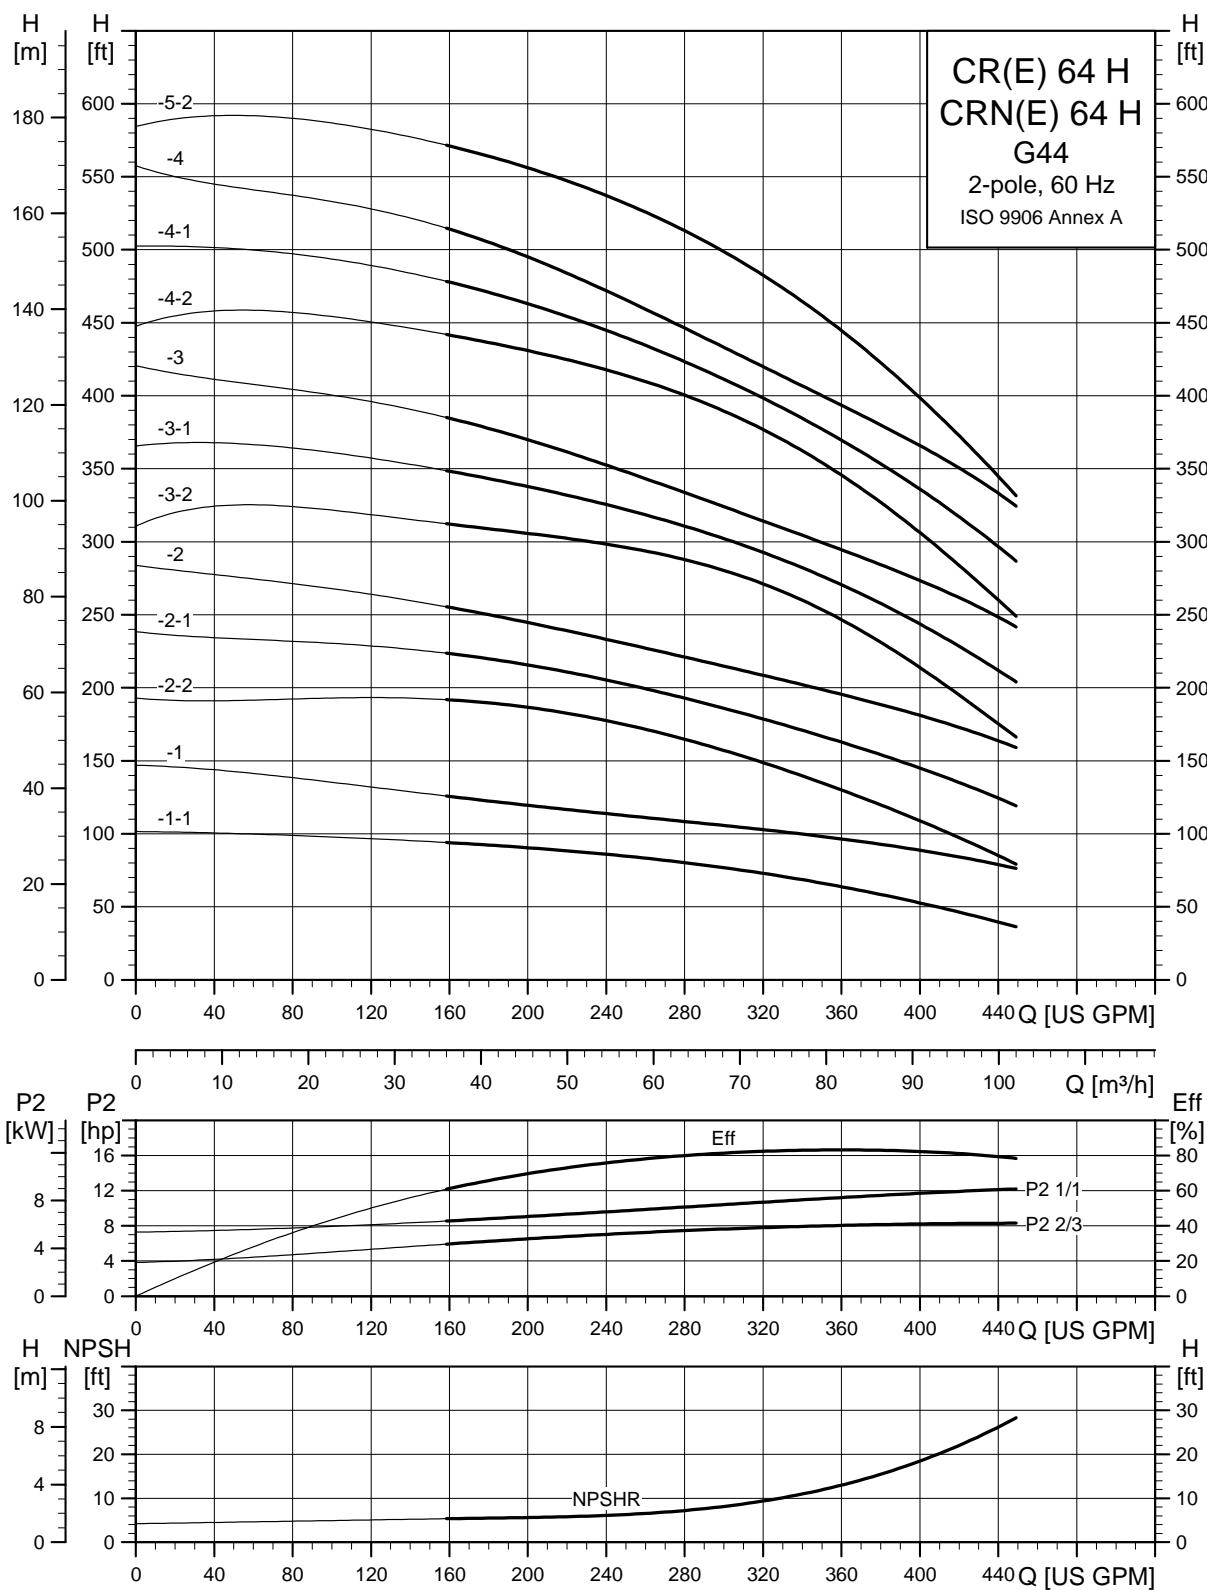

Dimensions and weights G44 (4" x 4")

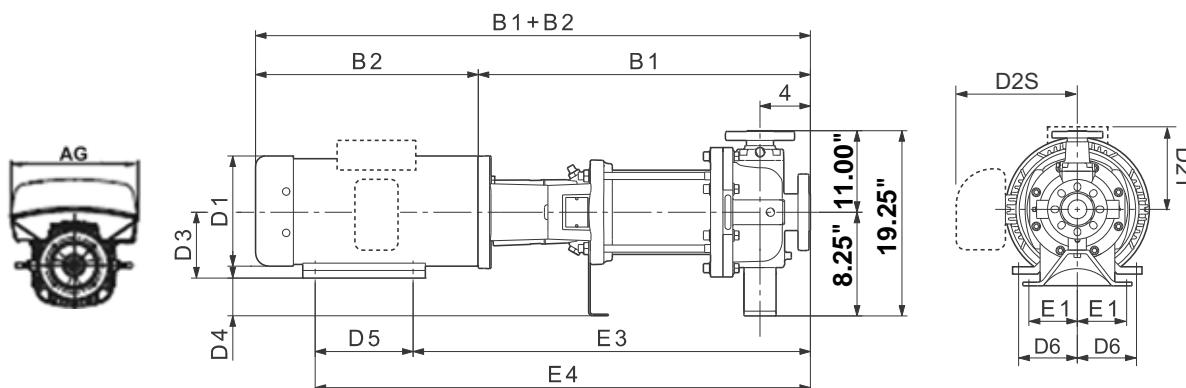

TM06 9699 1014 - TM06 1063 1514


Pump type	HP PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]	
		B1	B1+ B2	E1	E3	E4	D1	D2T	D3	D4	D5		D1	D2	B1+ B2	D1	D2	AG	B1+ B2	
CR(N)(E) 64-1-1 H	10	1	27.38	43.38	4.88	31.88	38.88	10.25	10.25	-	5.25	3.00	7.00	4.25	523	-	-	-	-	-
CR(N)(E) 64-1 H	15	3	27.38	42.50	4.88	31.88	38.88	10.25	6.25	-	5.25	3.00	7.00	4.25	492	-	-	-	10.04	9.33
CR(N) 64-1 H	20	3	26.88	45.38	4.88	31.88	40.13	12.38	8.00	-	6.25	2.00	8.25	5.00	600	10.63	8.00	45.00	10.04	9.33
CR(N) 64-2-2 H	20	3	30.13	48.63	4.88	35.13	45.13	12.38	8.00	-	6.25	2.00	10.00	5.00	622	11.50	9.00	48.00	13.39	12.13
CR(N)(E) 64-2-1 H	20	3	30.13	48.63	4.88	35.13	45.13	12.38	8.00	-	6.25	2.00	10.00	5.00	622	11.50	9.00	48.00	13.39	12.13
CR(N)(E) 64-2 H	25	3	30.13	52.50	4.88	35.13	44.63	12.38	8.00	-	7.00	1.25	9.50	5.50	642	11.50	11.38	49.13	13.39	12.13
CR(N)(E) 64-2 H	30	3	33.38	55.75	4.88	38.38	49.38	12.38	8.00	-	7.00	1.25	11.00	5.50	748	11.50	11.38	53.88	13.39	12.13
CR(N) 64-3-1 H	40	3	33.38	56.50	4.88	38.38	49.38	15.00	-	13.13	7.00	1.25	11.00	5.50	870	13.25	12.25	54.50	-	-
CR(N) 64-3 H	40	3	33.38	56.50	4.88	38.38	49.38	15.00	-	13.13	7.00	1.25	11.00	5.50	870	13.25	12.25	54.50	-	-
CR(N) 64-4-2 H	40	3	36.63	59.75	4.88	41.63	52.63	15.00	-	13.13	7.00	1.25	11.00	5.50	934	13.25	12.25	57.75	-	-
CR(N) 64-4-1 H	50	3	36.63	62.00	4.88	42.13	54.13	16.88	-	14.50	8.00	0.25	12.00	6.25	974	13.25	12.25	58.75	-	-
CR(N) 64-4 H	50	3	36.63	62.00	4.88	42.13	54.13	16.88	-	14.50	8.00	0.25	12.00	6.25	974	13.25	12.25	58.75	-	-
CR(N) 64-5-2 H	60	3	39.88	67.25	4.88	46.00	58.25	16.88	-	14.63	9.00	-0.75	12.25	7.00	1265	15.13	13.25	63.88	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.

Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions.

CR, CRE, CRN, CRNE 64 H GC/G10/G30/G60

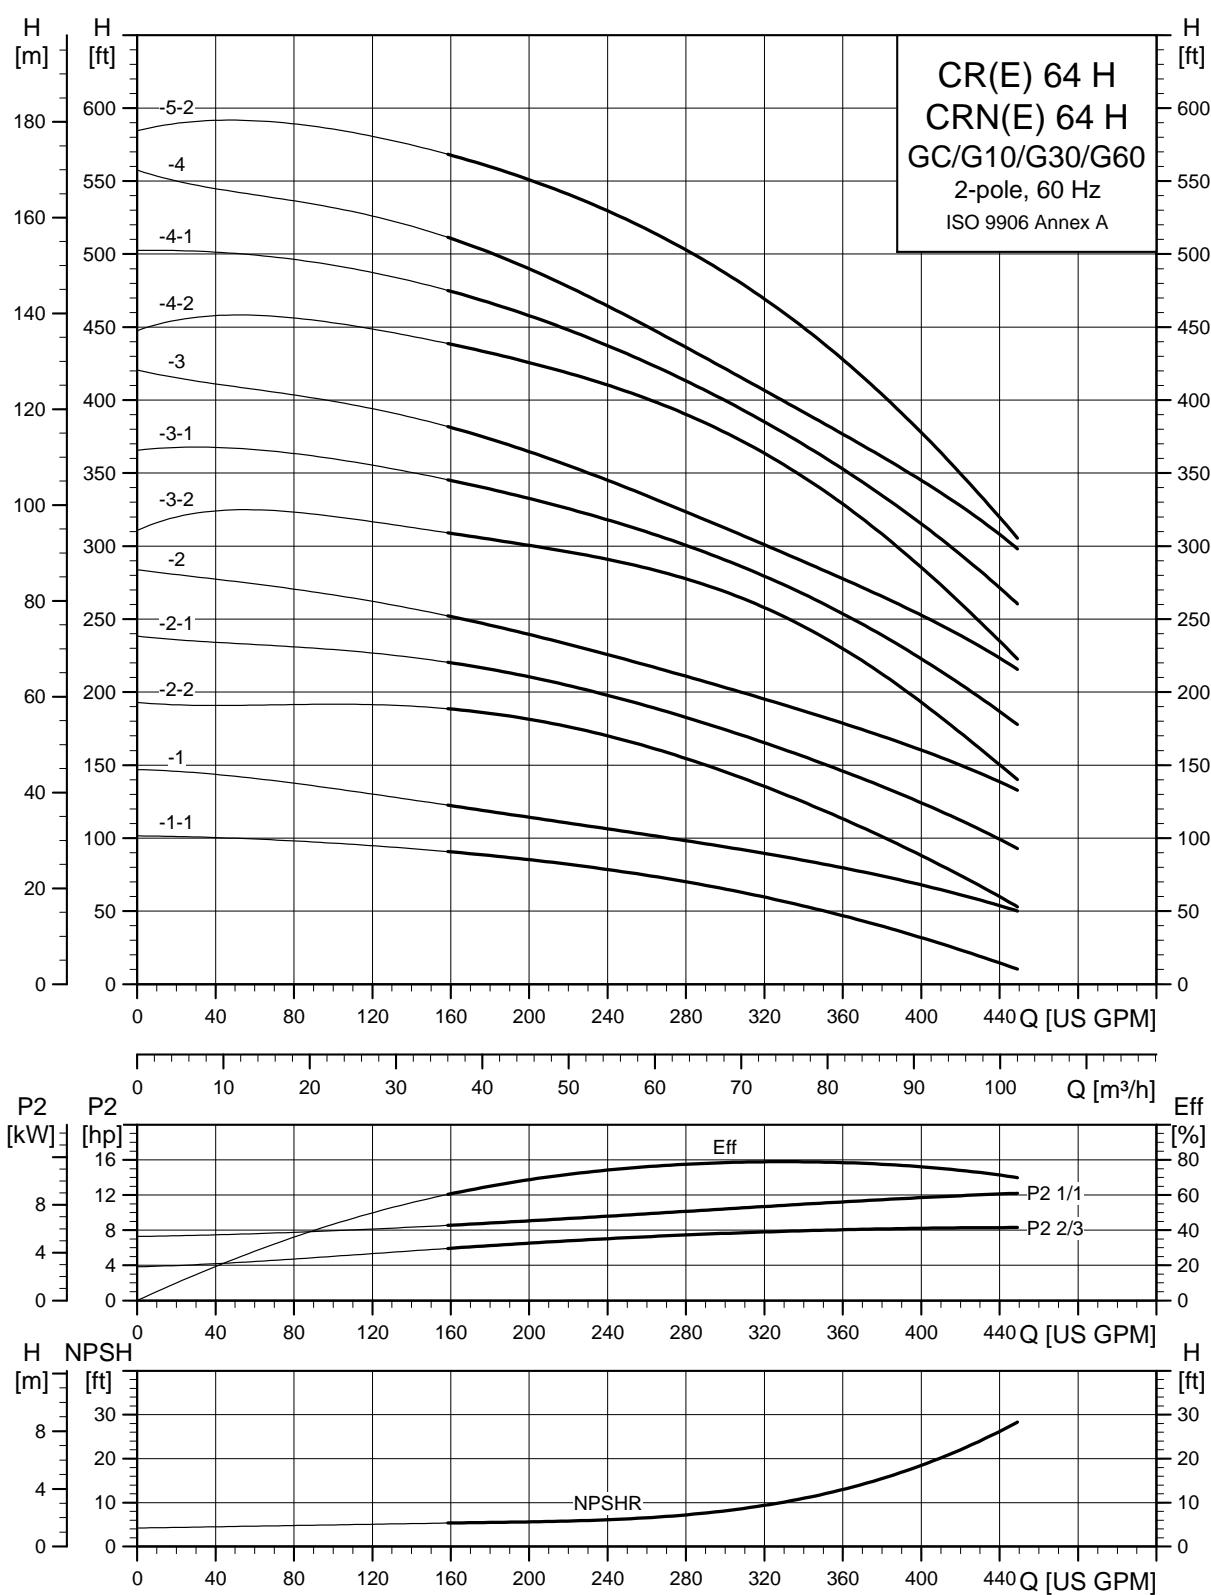

TMO4 6300 0912

Dimensions and weights GC (3" x 2" x 6")

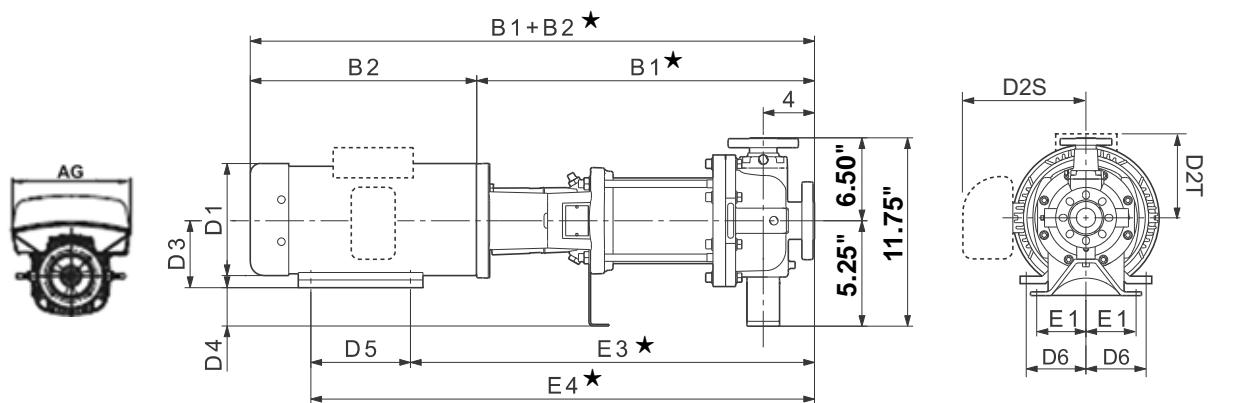

TM06 9699 1014 - TM06 1063 1514


Pump type	HP	PH	Dimensions [in] TEFC									Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
			B1★	B1+B2★	E1	E3★	E4★	D1	D2T	D3	D4	D5	D6	D1	D2	AG	B1+B2★					
CR(N)(E) 64-1-1 H	10	1	27.50	43.50	3.00	32.00	39.00	10.25	10.25	-	5.25	0.00	7.00	4.25	358	-	-	-	-			
		3	27.50	42.63	3.00	32.00	39.00	10.25	6.25	-	5.25	0.00	7.00	4.25	327	-	-	-	10.04 9.33 13.62 42.81 275			
CR(N)(E) 64-1 H	15	3	27.00	45.50	3.00	32.00	40.25	12.38	8.00	-	6.25	-1.00	8.25	5.00	435	10.63	8.00	45.13	10.04 9.33 13.62 42.98 339			
CR(N) 64-2-2 H	20	3	30.25	48.75	3.00	35.25	45.25	12.38	8.00	-	6.25	-1.00	10.00	5.00	474	11.50	9.00	48.13	13.39 12.13 16.54 49.03 515			
CR(N)(E) 64-2-1 H	20	3	30.25	48.75	3.00	35.25	45.25	12.38	8.00	-	6.25	-1.00	10.00	5.00	474	11.50	9.00	48.13	13.39 12.13 16.54 49.03 515			
CR(N)(E) 64-2 H	25	3	30.25	52.63	3.00	35.25	44.75	12.38	8.00	-	7.00	-1.75	9.50	5.50	494	11.50	11.38	49.25	13.39 12.13 16.54 52.97 546			
CR(N)(E) 64-3-2 H	30	3	33.50	55.88	3.00	38.50	49.50	12.38	8.00	-	7.00	-1.75	11.00	5.50	598	11.50	11.38	54.00	13.39 12.13 16.54 56.22 584			
CR(N) 64-3-1 H	40	3	33.50	56.63	3.00	38.50	49.50	15.00	-	13.13	7.00	-1.75	11.00	5.50	720	13.25	12.25	54.63	-	-	-	-
CR(N) 64-3 H	40	3	33.50	56.63	3.00	38.50	49.50	15.00	-	13.13	7.00	-1.75	11.00	5.50	720	13.25	12.25	54.63	-	-	-	-
CR(N) 64-4-2 H	40	3	36.63	59.88	3.00	41.63	52.63	15.00	-	13.13	7.00	-1.75	11.00	5.50	815	13.25	12.25	57.88	-	-	-	-
CR(N) 64-4-1 H	50	3	36.63	62.13	3.00	42.13	54.13	16.88	-	14.50	8.00	-2.75	12.00	6.25	855	13.25	12.25	58.88	-	-	-	-
CR(N) 64-4 H	50	3	36.63	62.13	3.00	42.13	54.13	16.88	-	14.50	8.00	-2.75	12.00	6.25	855	13.25	12.25	58.88	-	-	-	-
CR(N) 64-5-2 H	60	3	39.88	67.38	3.00	46.00	58.25	16.88	-	14.63	9.00	-3.75	12.25	7.00	1138	15.13	13.25	64.00	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

★ Add 0.16 inches for CRN-H dimensions.

Dimensions and weights G10 (3" x 2" x 6")

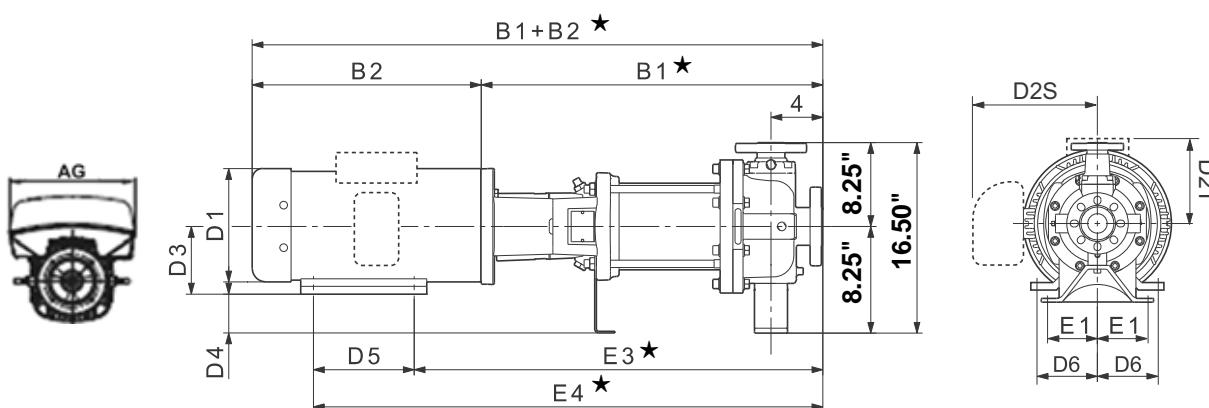

TM06 9699 1014 - TM06 1063 514


Pump type	HP PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]	
		B1★	B1+ B2★	E1	E3★	E4★	D1	D2T	D2S	D3	D4		D1	D2	B1+ B2★	D1	D2	AG	B1+ B2★	
CR(N)(E) 64-1-1 H	10	1	26.25	42.25	4.88	30.75	37.75	10.25	10.25	-	5.25	3.00	7.00	4.25	448	-	-	-	-	-
		3	26.25	41.38	4.88	30.75	37.75	10.25	6.25	-	5.25	3.00	7.00	4.25	417	-	-	-	10.04	9.33
CR(N)(E) 64-1 H	15	3	25.63	44.25	4.88	30.63	38.88	12.38	8.00	-	6.25	2.00	8.25	5.00	525	10.63	8.00	43.88	10.04	9.33
CR(N) 64-2-2 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	2.00	10.00	5.00	565	11.50	9.00	46.88	13.39	12.13
CR(N)(E) 64-2-1 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	2.00	10.00	5.00	565	11.50	9.00	46.88	13.39	12.13
CR(N)(E) 64-2 H	25	3	28.88	51.25	4.88	33.88	43.38	12.38	8.00	-	7.00	1.25	9.50	5.50	585	11.50	11.38	48.00	13.39	12.13
CR(N)(E) 64-3-2 H	30	3	32.13	54.50	4.88	37.13	48.13	12.38	8.00	-	7.00	1.25	11.00	5.50	688	11.50	11.38	52.75	13.39	12.13
CR(N) 64-3-1 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	1.25	11.00	5.50	810	13.25	12.25	53.38	-	-
CR(N) 64-3 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	1.25	11.00	5.50	810	13.25	12.25	53.38	-	-
CR(N) 64-4-2 H	40	3	35.38	58.63	4.88	40.38	51.38	15.00	-	13.13	7.00	1.25	11.00	5.50	907	13.25	12.25	56.63	-	-
CR(N) 64-4-1 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	0.25	12.00	6.25	947	13.25	12.25	57.63	-	-
CR(N) 64-4 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	0.25	12.00	6.25	947	13.25	12.25	57.63	-	-
CR(N) 64-5-2 H	60	3	38.63	66.13	4.88	44.75	57.00	16.88	-	14.63	9.00	-0.75	12.25	7.00	1232	15.13	13.25	62.75	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

★ Add 0.67 inches for CRN-H dimensions.

Dimensions and weights G30 (3" x 2" x 13")

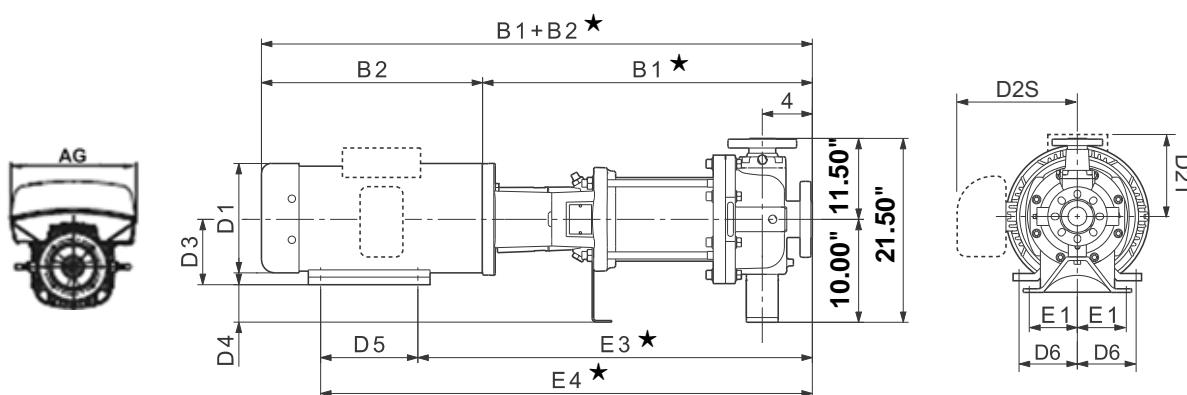

TM06 9699 1014 - TM06 1063 1514

Pump type	HP	PH	Dimensions [in] TEFC												Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]
			B1 ★	B1+ B2 ★	E1	E3 ★	E4 ★	D1	D2T	D2S	D3	D4	D5	D6		D1	D2	AG	B1+ B2 ★			
CR(N)(E) 64-1-1 H	10	1	26.25	42.25	4.88	30.75	37.75	10.25	10.25	-	5.25	4.75	7.00	4.25	527	-	-	-	-	-	-	-
		3	26.25	41.38	4.88	30.75	37.75	10.25	6.25	-	5.25	4.75	7.00	4.25	496	-	-	-	10.04	9.33	13.62	41.56
CR(N)(E) 64-1 H	15	3	25.63	44.25	4.88	30.63	38.88	12.38	8.00	-	6.25	3.75	8.25	5.00	604	10.63	8.00	43.88	10.04	9.33	13.62	41.61
CR(N) 64-2-2 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	3.75	10.00	5.00	626	11.50	9.00	46.88	13.39	12.13	16.54	47.66
CR(N)(E) 64-2-1 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	3.75	10.00	5.00	626	11.50	9.00	46.88	13.39	12.13	16.54	47.66
CR(N)(E) 64-2 H	25	3	28.88	51.25	4.88	33.88	43.38	12.38	8.00	-	7.00	3.00	9.50	5.50	646	11.50	11.38	48.00	13.39	12.13	16.54	51.60
CR(N)(E) 64-3-2 H	30	3	32.13	54.50	4.88	37.13	48.13	12.38	8.00	-	7.00	3.00	11.00	5.50	750	11.50	11.38	52.75	13.39	12.13	16.54	54.85
CR(N) 64-3-1 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	3.00	11.00	5.50	872	13.25	12.25	53.38	-	-	-	-
CR(N) 64-3 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	3.00	11.00	5.50	872	13.25	12.25	53.38	-	-	-	-
CR(N) 64-4-2 H	40	3	35.38	58.63	4.88	40.38	51.38	15.00	-	13.13	7.00	3.00	11.00	5.50	901	13.25	12.25	56.63	-	-	-	-
CR(N) 64-4-1 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	2.00	12.00	6.25	941	13.25	12.25	57.63	-	-	-	-
CR(N) 64-4 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	2.00	12.00	6.25	941	13.25	12.25	57.63	-	-	-	-
CR(N) 64-5-2 H	60	3	38.63	66.13	4.88	44.75	57.00	16.88	-	14.63	9.00	1.00	12.25	7.00	1223	15.13	13.25	62.75	-	-	-	-


Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

★ Add 0.67 inches for CRN-H dimensions.

Dimensions and weights G60 (3" x 2" x 8", 3" x 2" x 10")

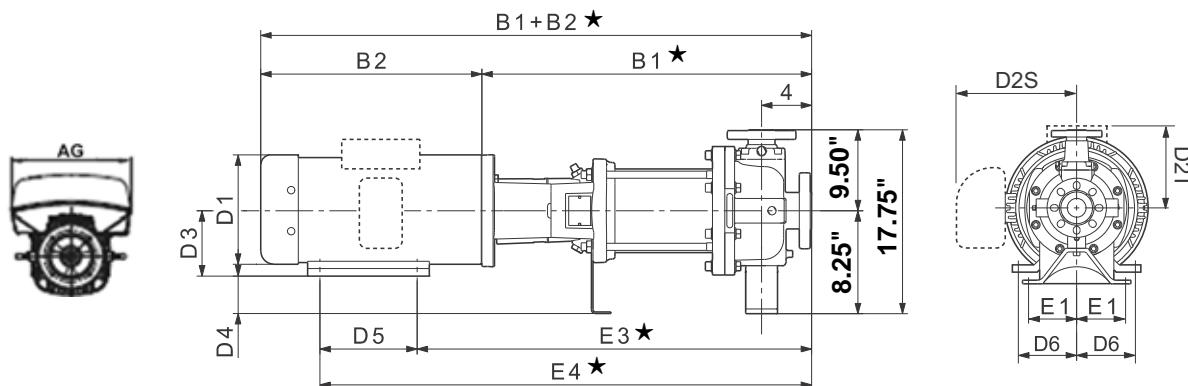

TM0699104 - TM0691031514


Pump type	HP PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
		B1 ★	B1+ B2 ★	E1	E3 ★	E4 ★	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+ B2 ★	D1	D2	AG	B1+ B2 ★		
CR(N)(E) 64-1-1 H	10	1	26.25	42.25	4.88	30.75	37.75	10.25	10.25	-	5.25	3.00	7.00	4.25	510	-	-	-	-	-	-	
		3	26.25	41.38	4.88	30.75	37.75	10.25	6.25	-	5.25	3.00	7.00	4.25	479	-	-	-	10.04	9.33	13.62	41.56
CR(N)(E) 64-1 H	15	3	25.63	44.25	4.88	30.63	38.88	12.38	8.00	-	6.25	2.00	8.25	5.00	587	10.63	8.00	43.88	10.04	9.33	13.62	41.61
CR(N) 64-2-2 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	2.00	10.00	5.00	606	11.50	9.00	46.88	13.39	12.13	16.54	47.66
CR(N)(E) 64-2-1 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	2.00	10.00	5.00	606	11.50	9.00	46.88	13.39	12.13	16.54	47.66
CR(N)(E) 64-2 H	25	3	28.88	51.25	4.88	33.88	43.88	12.38	8.00	-	7.00	1.25	9.50	5.50	626	11.50	11.38	48.00	13.39	12.13	16.54	51.60
CR(N)(E) 64-3-2 H	30	3	32.13	54.50	4.88	37.13	48.13	12.38	8.00	-	7.00	1.25	11.00	5.50	732	11.50	11.38	52.75	13.39	12.13	16.54	54.85
CR(N) 64-3-1 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	1.25	11.00	5.50	854	13.25	12.25	53.38	-	-	-	-
CR(N) 64-3 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	1.25	11.00	5.50	854	13.25	12.25	53.38	-	-	-	-
CR(N) 64-4-2 H	40	3	35.38	58.63	4.88	40.38	51.38	15.00	-	13.13	7.00	1.25	11.00	5.50	909	13.25	12.25	56.63	-	-	-	-
CR(N) 64-4-1 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	0.25	12.00	6.25	949	13.25	12.25	57.63	-	-	-	-
CR(N) 64-4 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	0.25	12.00	6.25	949	13.25	12.25	57.63	-	-	-	-
CR(N) 64-5-2 H	60	3	38.63	66.13	4.88	44.75	57.00	16.88	-	14.63	9.00	-0.75	12.25	7.00	1232	15.13	13.25	62.75	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.


★ Add 0.67 inches for CRN-H dimensions.

CR, CRE, CRN, CRNE 64 H G20/G50

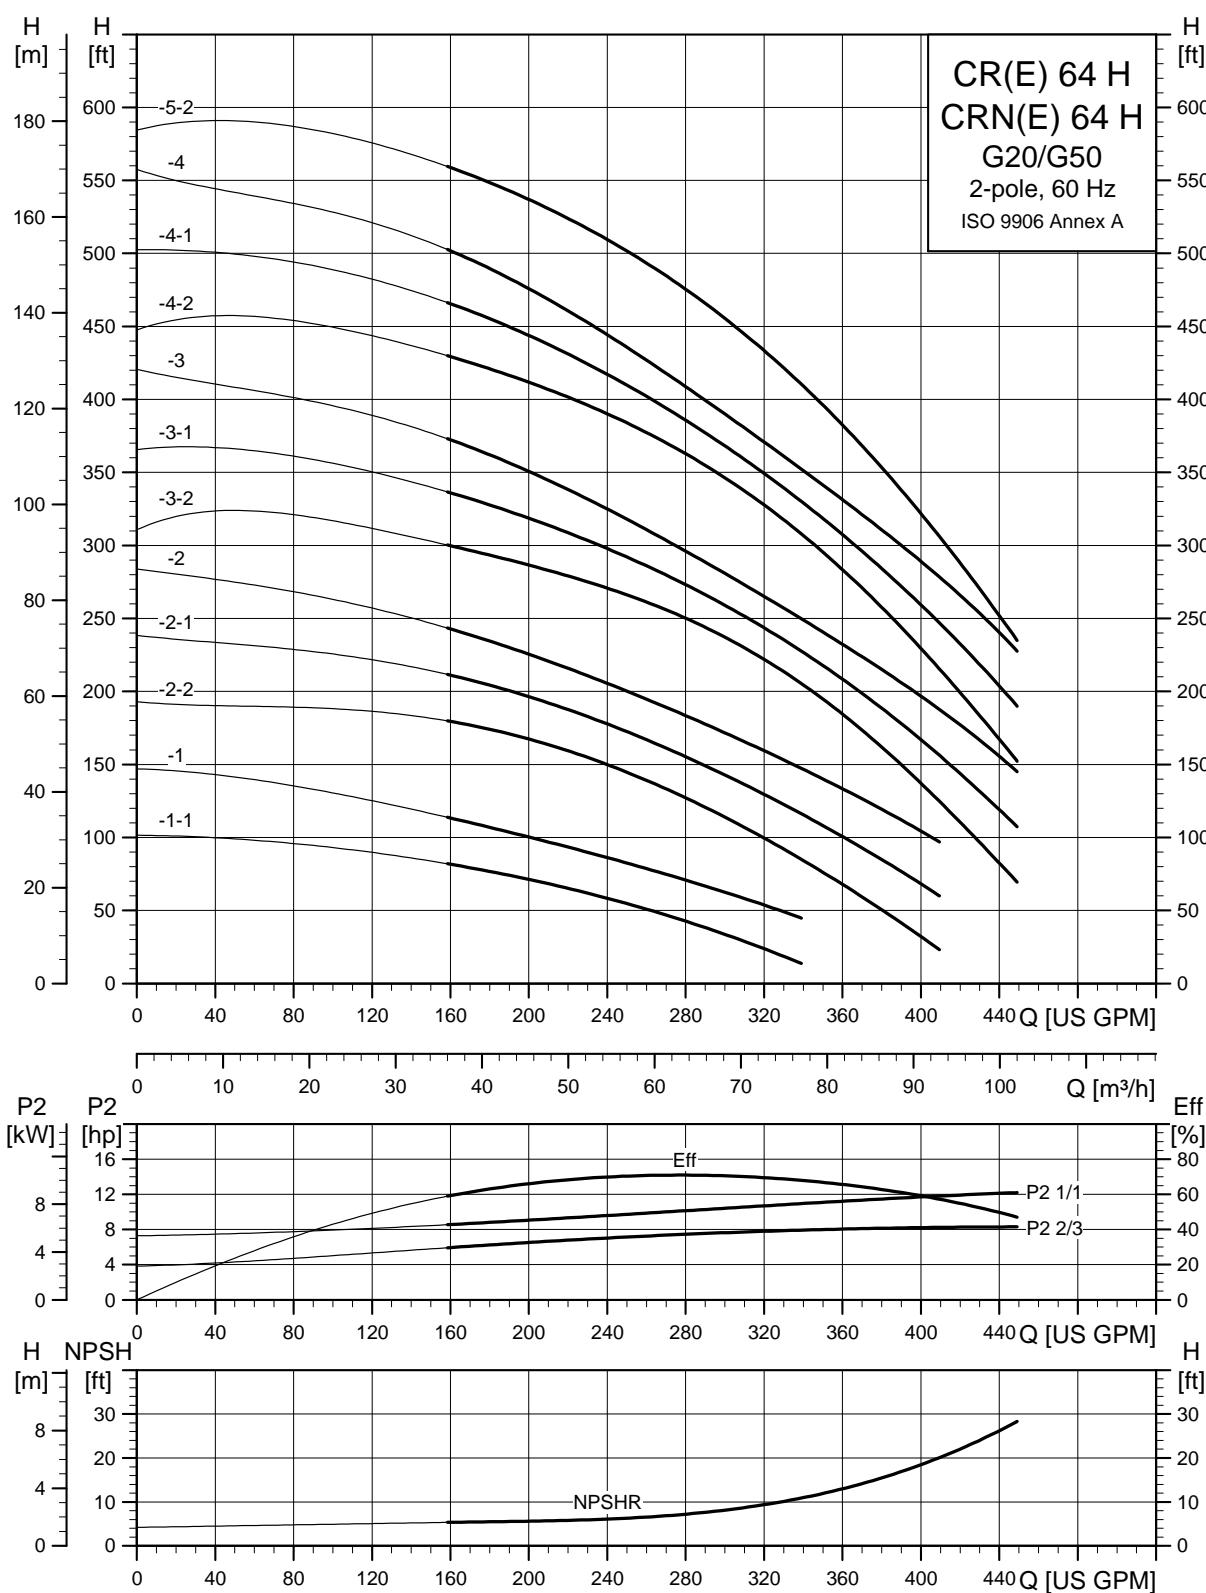

TM04 6299 0912

Dimensions and weights G20 (3" x 1.5" x 13")

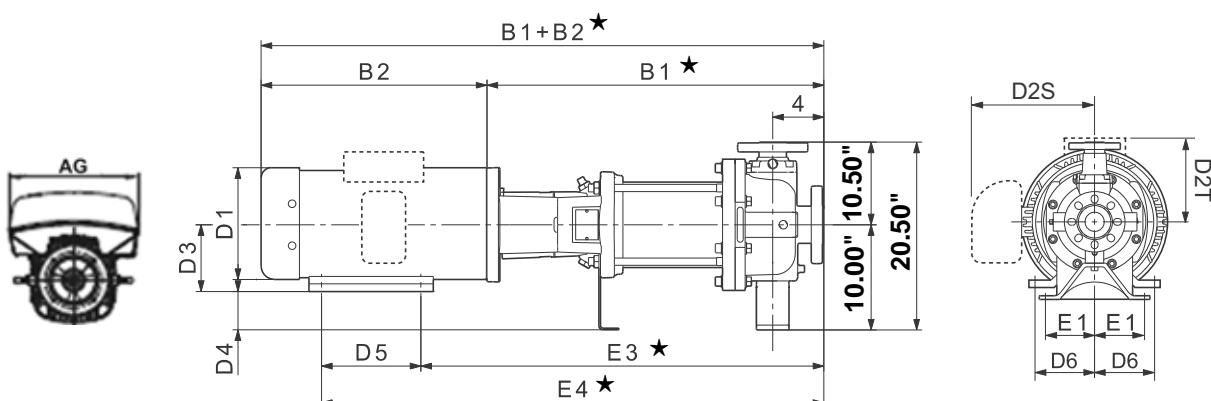

TM06 9999 1014 - TM06 1063 1514

Pump type	HP PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP	Dimensions [in] MLE*					Ship. wt. [lbs]			
		B1★	B2★	E1	E3★	E4★	D1	D2T	D3	D4	D5			D1	D2	B1+ B2★	D1	D2	AG	B1+ B2★		
CR(N)(E) 64-1-1 H	10	1	26.25	42.25	4.88	30.75	37.75	10.25	10.25	-	5.25	4.75	7.00	4.25	499	-	-	-	-	-	-	
		3	26.25	41.38	4.88	30.75	37.75	10.25	6.25	-	5.25	4.75	7.00	4.25	468	-	-	-	10.04	9.33	13.62	41.56
CR(N)(E) 64-1 H	15	3	25.63	44.25	4.88	30.63	38.88	12.38	8.00	-	6.25	3.75	8.25	5.00	576	10.63	8.00	43.88	10.04	9.33	13.62	41.61
CR(N) 64-2-2 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	3.75	10.00	5.00	598	11.50	9.00	46.88	13.39	12.13	16.54	47.66
CR(N)(E) 64-2-1 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	3.75	10.00	5.00	598	11.50	9.00	46.88	13.39	12.13	16.54	47.66
CR(N)(E) 64-2 H	25	3	28.88	51.25	4.88	33.88	43.38	12.38	8.00	-	7.00	3.00	9.50	5.50	618	11.50	11.38	48.00	13.39	12.13	16.54	51.60
CR(N)(E) 64-3-2 H	30	3	32.13	54.50	4.88	37.13	48.13	12.38	8.00	-	7.00	3.00	11.00	5.50	724	11.50	11.38	52.75	13.39	12.13	16.54	54.85
CR(N) 64-3-1 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	3.00	11.00	5.50	846	13.25	12.25	53.38	-	-	-	-
CR(N) 64-3 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	3.00	11.00	5.50	846	13.25	12.25	53.38	-	-	-	-
CR(N) 64-4-2 H	40	3	35.38	58.63	4.88	40.38	51.38	15.00	-	13.13	7.00	3.00	11.00	5.50	901	13.25	12.25	56.63	-	-	-	-
CR(N) 64-4-1 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	2.00	12.00	6.25	941	13.25	12.25	57.63	-	-	-	-
CR(N) 64-4 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	2.00	12.00	6.25	941	13.25	12.25	57.63	-	-	-	-
CR(N) 64-5-2 H	60	3	38.63	66.13	4.88	44.75	57.00	16.88	-	14.63	9.00	1.00	12.25	7.00	1226	15.13	13.25	62.75	-	-	-	-


Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.

Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

★ Add 0.67 inches for CRN-H dimensions.

Dimensions and weights G50 (3" x 1.5" x 8", 3" x 1.5" x 10")

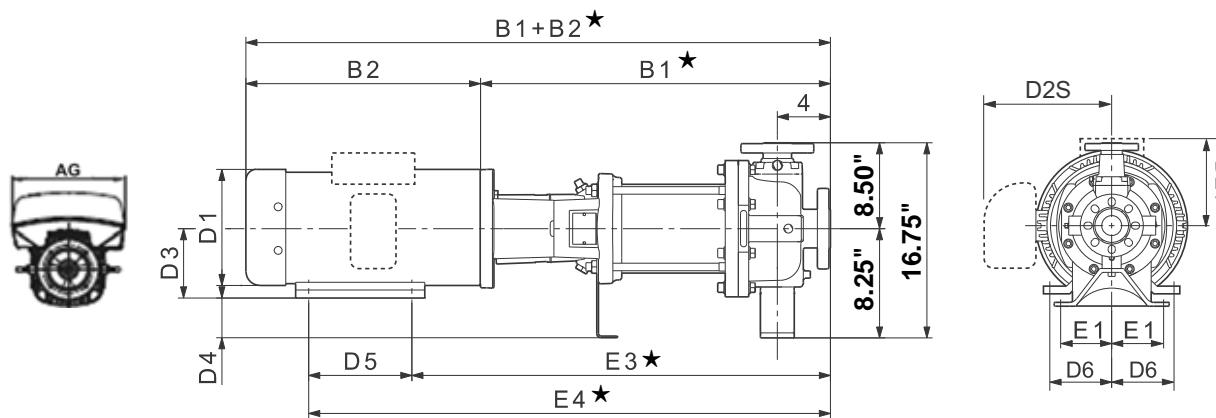

TM06 9689 1014 - TM06 1063 1514


Pump type	HP PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]				
		B1★	B1+B2★	E1	E3★	E4★	D1	D2T	D2S	D3	D4		D1	D2	B1+B2★	D1	D2	AG	B1+B2★				
CR(N)(E) 64-1-1 H	10	1	26.25	42.25	4.88	30.75	37.75	10.25	10.25	-	5.25	3.00	7.00	4.25	505	-	-	-	-	-			
		3	26.25	41.38	4.88	30.75	37.75	10.25	6.25	-	5.25	3.00	7.00	4.25	474	-	-	-	10.04	9.33	13.62	41.56	423
CR(N)(E) 64-1 H	15	3	25.63	44.25	4.88	30.63	38.88	12.38	8.00	-	6.25	2.00	8.25	5.00	582	10.63	8.00	43.88	10.04	9.33	13.62	41.61	486
CR(N) 64-2-2 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	2.00	10.00	5.00	606	11.50	9.00	46.88	13.39	12.13	16.54	47.66	647
CR(N)(E) 64-2-1 H	20	3	28.88	47.50	4.88	33.88	43.88	12.38	8.00	-	6.25	2.00	10.00	5.00	606	11.50	9.00	46.88	13.39	12.13	16.54	47.66	647
CR(N)(E) 64-2 H	25	3	28.88	51.25	4.88	33.88	43.38	12.38	8.00	-	7.00	1.25	9.50	5.50	626	11.50	11.38	48.00	13.39	12.13	16.54	51.60	678
CR(N)(E) 64-3-2 H	30	3	32.13	54.50	4.88	37.13	48.13	12.38	8.00	-	7.00	1.25	11.00	5.50	728	11.50	11.38	52.75	13.39	12.13	16.54	54.85	714
CR(N) 64-3-1 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	1.25	11.00	5.50	850	13.25	12.25	53.38	-	-	-	-	-
CR(N) 64-3 H	40	3	32.13	55.38	4.88	37.13	48.13	15.00	-	13.13	7.00	1.25	11.00	5.50	850	13.25	12.25	53.38	-	-	-	-	-
CR(N) 64-4-2 H	40	3	35.38	58.63	4.88	40.38	51.38	15.00	-	13.13	7.00	1.25	11.00	5.50	907	13.25	12.25	56.63	-	-	-	-	-
CR(N) 64-4-1 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	0.25	12.00	6.25	947	13.25	12.25	57.63	-	-	-	-	-
CR(N) 64-4 H	50	3	35.38	60.88	4.88	40.88	52.88	16.88	-	14.50	8.00	0.25	12.00	6.25	947	13.25	12.25	57.63	-	-	-	-	-
CR(N) 64-5-2 H	60	3	38.63	66.13	4.88	44.75	57.00	16.88	-	14.63	9.00	-0.75	12.25	7.00	1230	15.13	13.25	62.75	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.


★ Add 0.67 inches for CRN-H dimensions.

CR, CRE, CRN, CRNE 64 H G40/G70

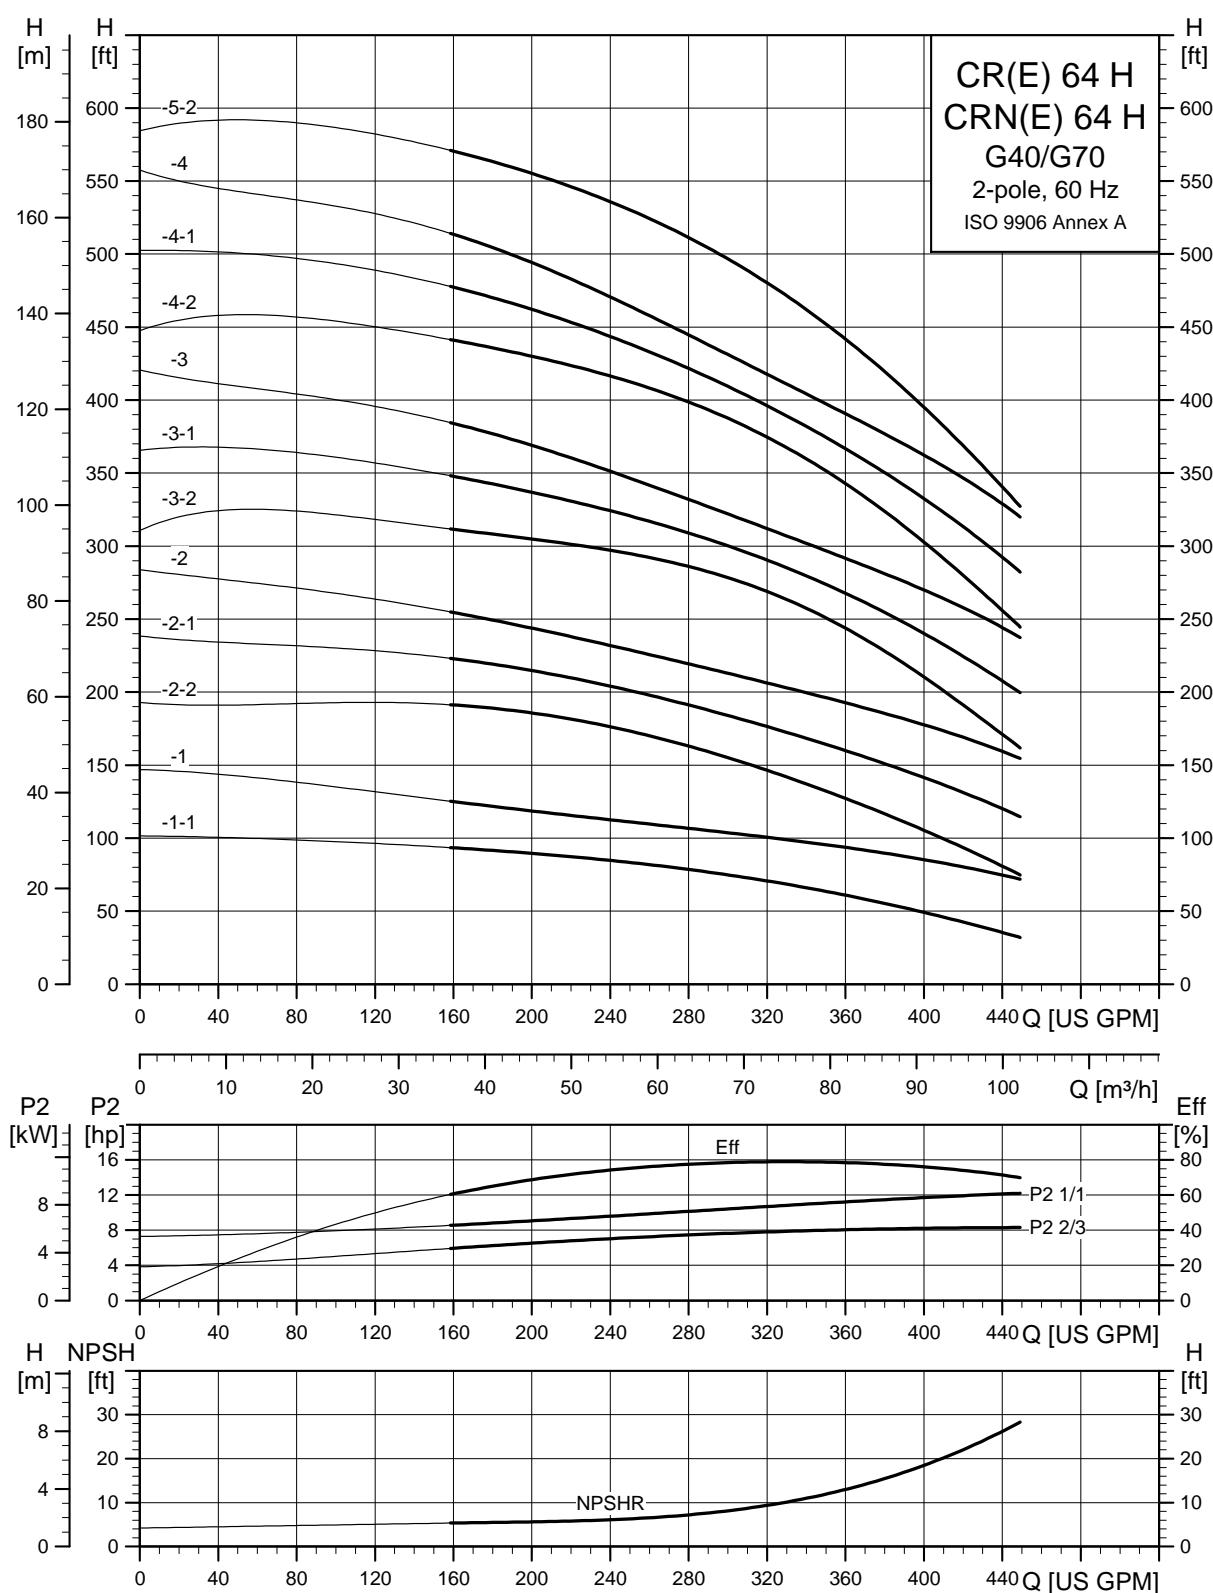

TM4 6301 0912

Dimensions and weights G40 (4" x 3" x 10", 4" x 3" x 13")

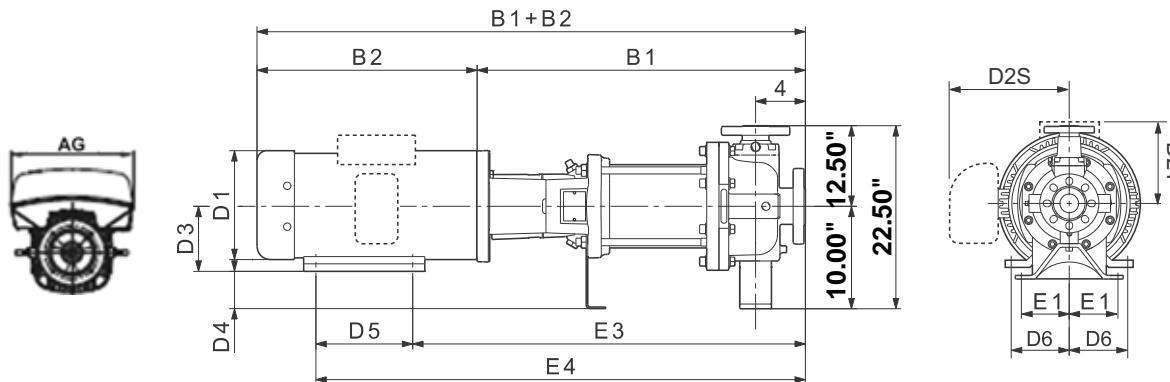


TM06 9699 1014 - TM06 1063 1514

Pump type	HP	PH	Dimensions [in] TEFC									Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]			
			B1	B1+B2	E1	E3	E4	D1	D2T	D2S	D3	D4	D1	D2	B1+B2	D1	D2	AG	B1+B2				
CR(N)(E) 64-1-1 H	10	1	27.38	43.38	4.88	31.88	38.88	10.25	10.25	-	5.25	4.75	7.00	4.25	565	-	-	-	-	-	-		
		3	27.38	42.50	4.88	31.88	38.88	10.25	6.25	-	5.25	4.75	7.00	4.25	534	-	-	-	10.04	9.33	13.62	42.69	482
CR(N)(E) 64-1 H	15	3	26.88	45.38	4.88	31.88	40.13	12.38	8.00	-	6.25	3.75	8.25	5.00	642	10.63	8.00	45.00	10.04	9.33	13.62	42.86	546
CR(N) 64-2-2 H	20	3	30.13	48.63	4.88	35.13	45.13	12.38	8.00	-	6.25	3.75	10.00	5.00	661	11.50	9.00	48.00	13.39	12.13	16.54	48.91	702
CR(N)(E) 64-2-1 H	20	3	30.13	48.63	4.88	35.13	45.13	12.38	8.00	-	6.25	3.75	10.00	5.00	661	11.50	9.00	48.00	13.39	12.13	16.54	48.91	702
CR(N)(E) 64-2 H	25	3	30.13	52.50	4.88	35.13	44.63	12.38	8.00	-	7.00	3.00	9.50	5.50	681	11.50	11.38	49.13	13.39	12.13	16.54	52.85	733
CR(N)(E) 64-3-2 H	30	3	33.38	55.75	4.88	38.38	49.38	12.38	8.00	-	7.00	3.00	11.00	5.50	787	11.50	11.38	53.88	13.39	12.13	16.54	56.10	773
CR(N) 64-3-1 H	40	3	33.38	56.50	4.88	38.38	49.38	15.00	-	13.13	7.00	3.00	11.00	5.50	909	13.25	12.25	54.50	-	-	-	-	-
CR(N) 64-3 H	40	3	33.38	56.50	4.88	38.38	49.38	15.00	-	13.13	7.00	3.00	11.00	5.50	909	13.25	12.25	54.50	-	-	-	-	-
CR(N) 64-4-2 H	40	3	36.63	59.75	4.88	41.63	52.63	15.00	-	13.13	7.00	3.00	11.00	5.50	942	13.25	12.25	57.75	-	-	-	-	-
CR(N) 64-4-1 H	50	3	36.63	62.00	4.88	42.13	54.13	16.88	-	14.50	8.00	2.00	12.00	6.25	982	13.25	12.25	58.75	-	-	-	-	-
CR(N) 64-4 H	50	3	36.63	62.00	4.88	42.13	54.13	16.88	-	14.50	8.00	2.00	12.00	6.25	982	13.25	12.25	58.75	-	-	-	-	-
CR(N) 64-5-2 H	60	3	39.88	67.25	4.88	46.00	58.25	16.88	-	14.63	9.00	1.00	12.25	7.00	1276	15.13	13.25	63.88	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

Dimensions and weights G70 (4" x 3" x 8", 4" x 3" x 10")

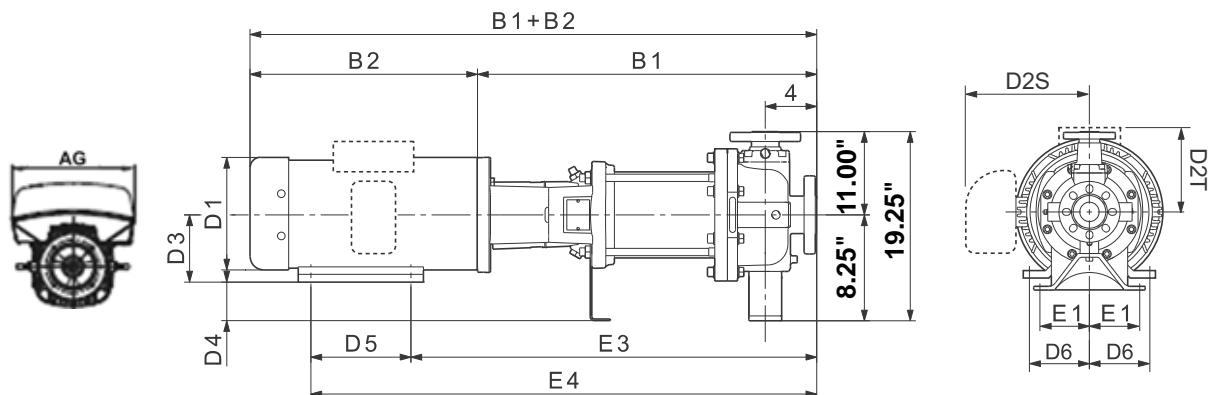


TM06 9699 1014 - TM06 1063 1514

Pump type	HP PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]				
		B1	B1+ B2	E1	E3	E4	D1	D2T	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG					
CR(N)(E) 64-1-1 H	10	1	27.38	43.38	4.88	31.88	38.88	10.25	10.25	-	5.25	3.00	7.00	4.25	536	-	-	-	-	-			
CR(N)(E) 64-1-1 H	10	3	27.38	42.50	4.88	31.88	38.88	10.25	6.25	-	5.25	3.00	7.00	4.25	505	-	-	-	10.04	9.33	13.62	42.69	453
CR(N)(E) 64-1 H	15	3	26.88	45.38	4.88	31.88	40.13	12.38	8.00	-	6.25	2.00	8.25	5.00	613	10.63	8.00	45.00	10.04	9.33	13.62	42.86	517
CR(N) 64-2-2 H	20	3	30.13	48.63	4.88	35.13	45.13	12.38	8.00	-	6.25	2.00	10.00	5.00	635	11.50	9.00	48.00	13.39	12.13	16.54	48.91	676
CR(N)(E) 64-2-1 H	20	3	30.13	48.63	4.88	35.13	45.13	12.38	8.00	-	6.25	2.00	10.00	5.00	635	11.50	9.00	48.00	13.39	12.13	16.54	48.91	676
CR(N)(E) 64-2 H	25	3	30.13	52.50	4.88	35.13	44.63	12.38	8.00	-	7.00	1.25	9.50	5.50	655	11.50	11.38	49.13	13.39	12.13	16.54	52.85	707
CR(N)(E) 64-3-2 H	30	3	33.38	55.75	4.88	38.38	49.38	12.38	8.00	-	7.00	1.25	11.00	5.50	759	11.50	11.38	53.88	13.39	12.13	16.54	56.10	745
CR(N) 64-3-1 H	40	3	33.38	56.50	4.88	38.38	49.38	15.00	-	13.13	7.00	1.25	11.00	5.50	881	13.25	12.25	54.50	-	-	-	-	-
CR(N) 64-3 H	40	3	33.38	56.50	4.88	38.38	49.38	15.00	-	13.13	7.00	1.25	11.00	5.50	881	13.25	12.25	54.50	-	-	-	-	-
CR(N) 64-4-2 H	40	3	36.63	59.75	4.88	41.63	52.63	15.00	-	13.13	7.00	1.25	11.00	5.50	940	13.25	12.25	57.75	-	-	-	-	-
CR(N) 64-4-1 H	50	3	36.63	62.00	4.88	42.13	54.13	16.88	-	14.50	8.00	0.25	12.00	6.25	980	13.25	12.25	58.75	-	-	-	-	-
CR(N) 64-4 H	50	3	36.63	62.00	4.88	42.13	54.13	16.88	-	14.50	8.00	0.25	12.00	6.25	980	13.25	12.25	58.75	-	-	-	-	-
CR(N) 64-5-2 H	60	3	39.88	67.25	4.88	46.00	58.25	16.88	-	14.63	9.00	-0.75	12.25	7.00	1274	15.13	13.25	63.88	-	-	-	-	-


Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

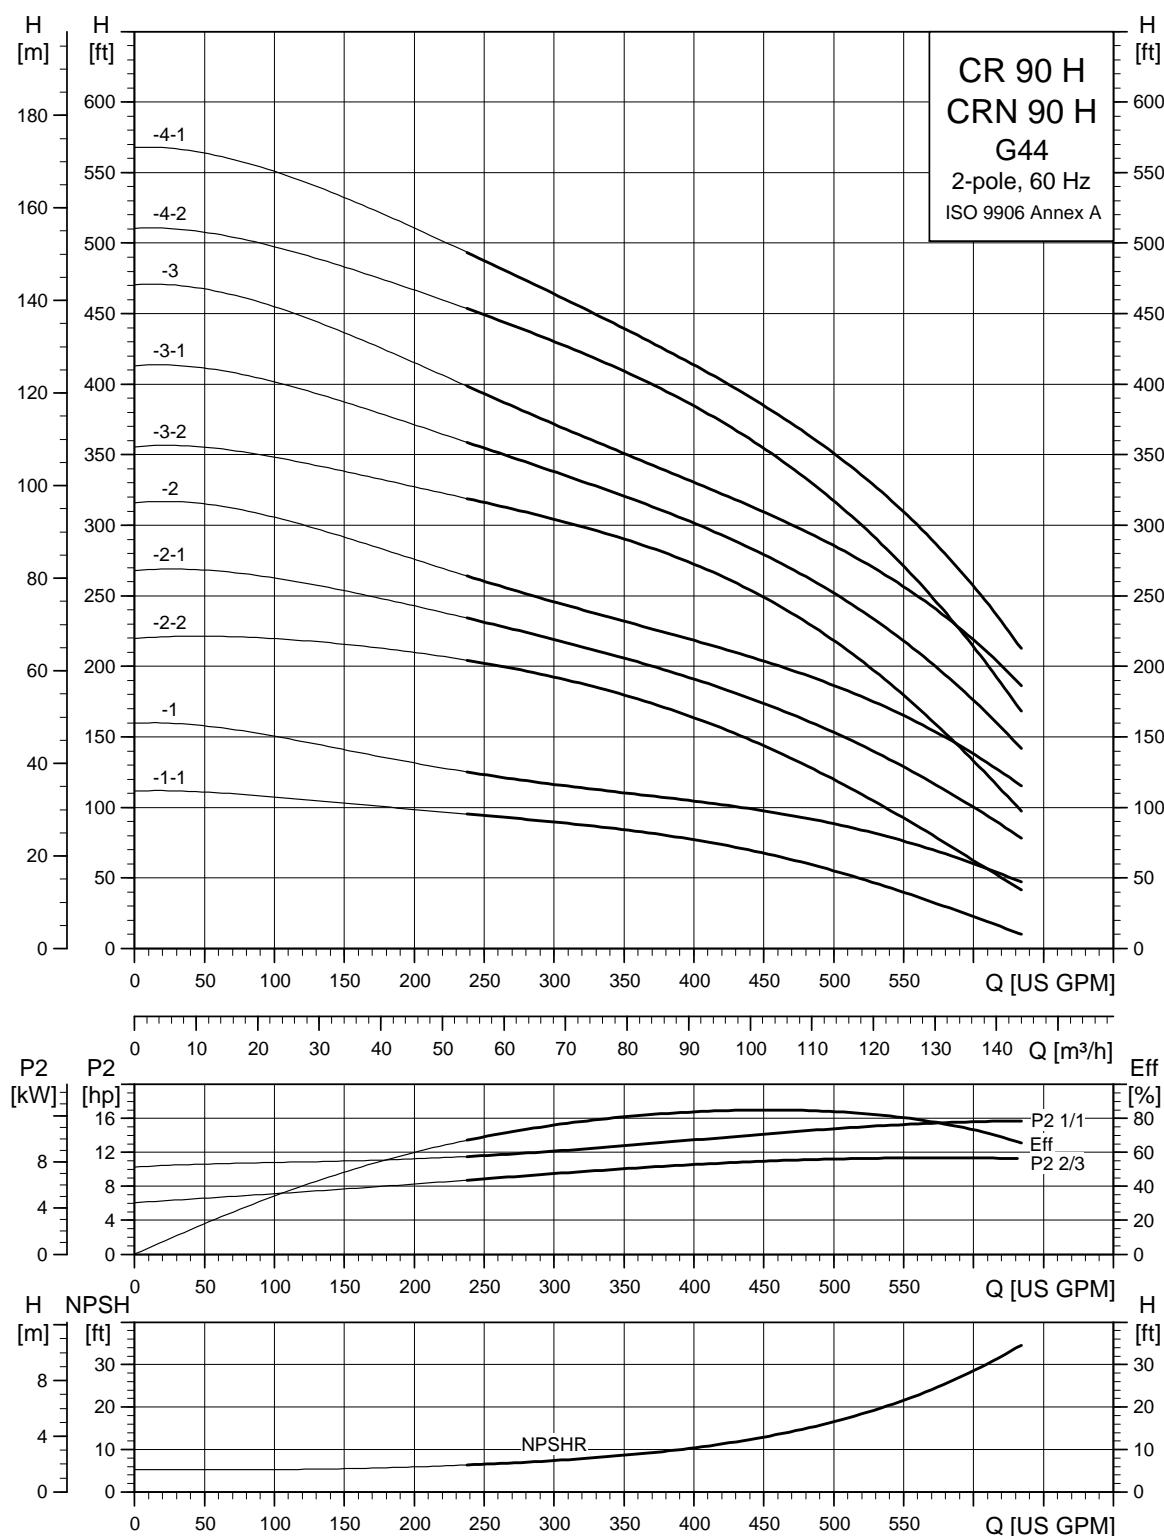CR, CRN 90 H G44

TM04 6306 0912

Dimensions and weights G44 (4" x 4")

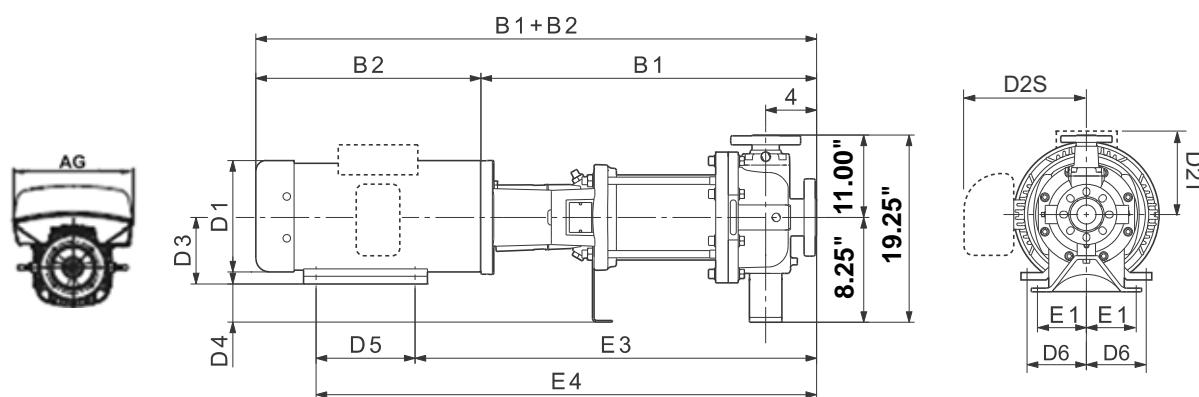


TM06 9699 1014 - TM06 1063 1514

Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
			B1	B1+ B2	E1	E3	E4	D1	D2T	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2			
CR(N) 90-1-1 H	15	3	27.25	45.75	4.88	32.25	40.50	12.38	8.00	-	6.25	2.00	8.25	5.00	554	10.63	8.00	45.38	10.04	9.33	13.62	43.23	508
CR(N) 90-1 H	20	3	27.25	45.75	4.88	32.25	42.25	12.38	8.00	-	6.25	2.00	10.00	5.00	548	11.50	9.00	45.13	13.39	12.13	16.54	46.03	658
CR(N) 90-2-2 H	25	3	30.88	53.25	4.88	35.88	45.38	12.38	8.00	-	7.00	1.25	9.50	5.50	586	11.50	11.38	49.88	13.39	12.13	16.54	53.60	698
CR(N) 90-2-1 H	30	3	30.88	53.25	4.88	35.88	46.88	12.38	8.00	-	7.00	1.25	11.00	5.50	612	11.50	11.38	51.38	13.39	12.13	16.54	53.60	727
CR(N) 90-2 H	40	3	30.88	54.00	4.88	35.88	46.88	15.00	-	13.13	7.00	1.25	11.00	5.50	863	13.25	12.25	52.00	-	-	-	-	-
CR(N) 90-3-2 H	40	3	34.50	57.63	4.88	39.50	50.50	15.00	-	13.13	7.00	1.25	11.00	5.50	914	13.25	12.25	55.63	-	-	-	-	-
CR(N) 90-3-1 H	50	3	34.50	59.88	4.88	40.00	52.00	16.88	-	14.50	8.00	0.25	12.00	6.25	954	13.25	12.25	56.63	-	-	-	-	-
CR(N) 90-3 H	50	3	34.50	59.88	4.88	40.00	52.00	16.88	-	14.50	8.00	0.25	12.00	6.25	954	13.25	12.25	56.63	-	-	-	-	-
CR(N) 90-4-2 H	60	3	38.13	65.50	4.88	44.25	56.50	16.88	-	14.63	9.00	-0.75	12.25	7.00	1252	15.13	13.25	62.13	-	-	-	-	-
CR(N) 90-4-1 H	60	3	38.13	65.50	4.88	44.25	56.50	16.88	-	14.63	9.00	-0.75	12.25	7.00	1252	15.13	13.25	62.13	-	-	-	-	-


Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

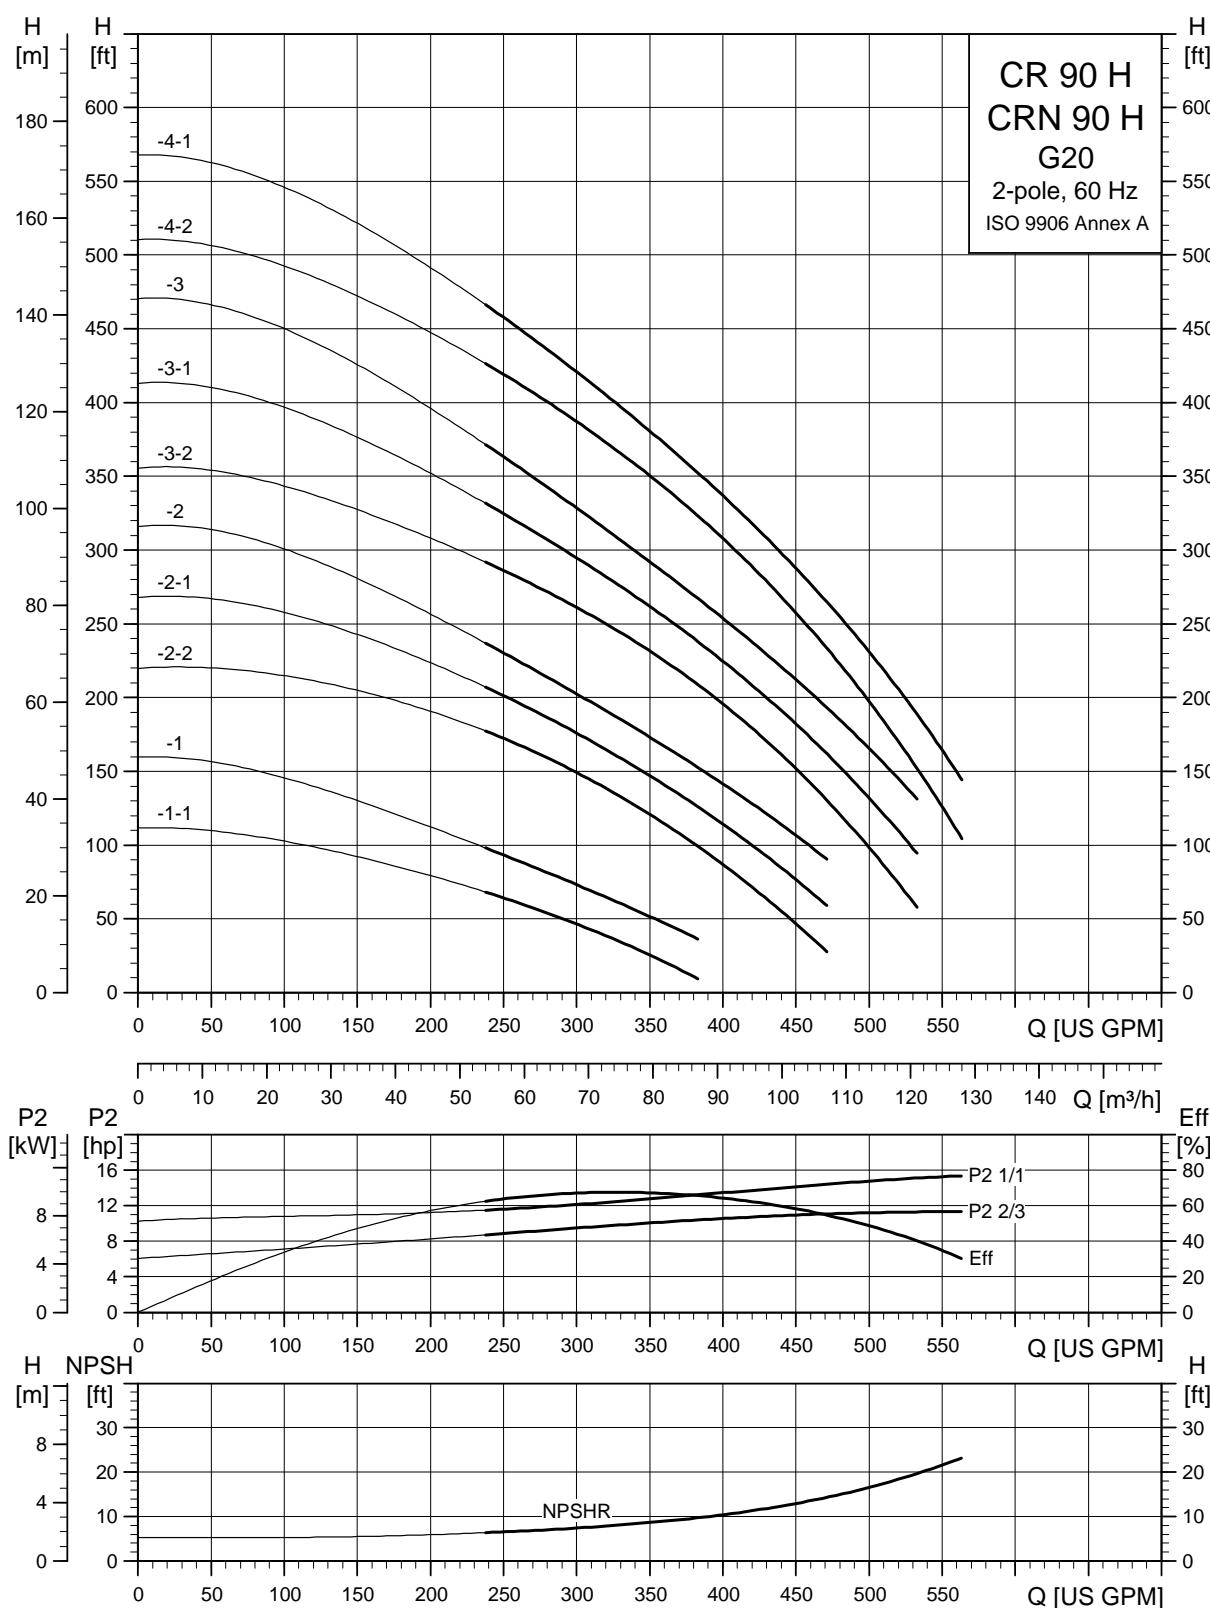CR, CRN 90 H G20

TM04 6303 4610

Dimensions and weights G20 (3" x 1.5" x 13")

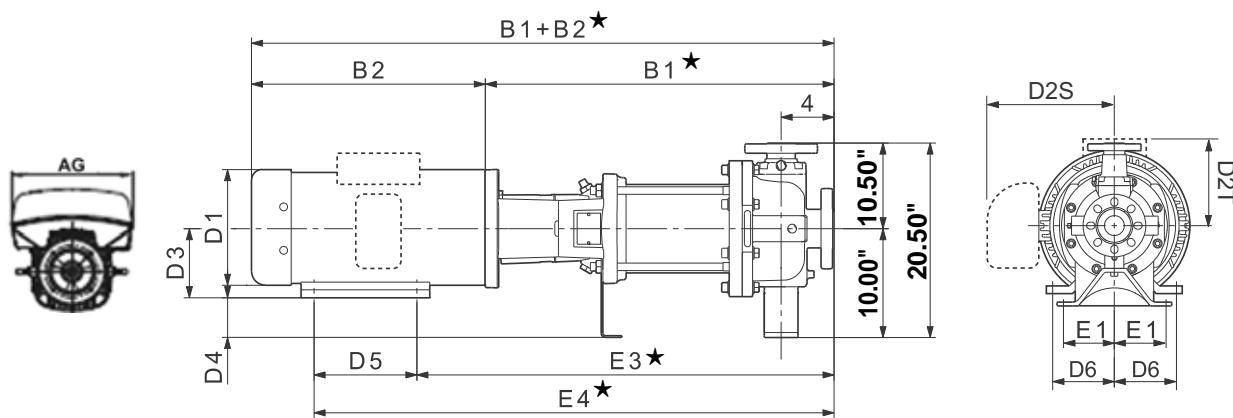


Pump type	HP	PH	Dimensions [in] TEFC									Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]				
			B1 ★	B1+ B2 ★	E1	E3 ★	E4 ★	D1	D2T	D3	D4	D5	D6	D1	D2	AG	B1+ B2 ★						
CR(N) 90-1-1 H	15	3	26.00	44.63	4.88	31.00	39.25	12.38	8.00	-	6.25	3.75	8.25	5.00	527	10.63	8.00	44.25	10.04	9.33	13.62	41.98	482
CR(N) 90-1 H	20	3	26.00	44.63	4.88	31.00	41.00	12.38	8.00	-	6.25	3.75	10.00	5.00	522	11.50	9.00	44.00	13.39	12.13	16.54	44.78	632
CR(N) 90-2-2 H	25	3	29.63	52.00	4.88	34.63	44.13	12.38	8.00	-	7.00	3.00	9.50	5.50	550	11.50	11.38	48.75	13.39	12.13	16.54	52.35	663
CR(N) 90-2-1 H	30	3	29.63	52.00	4.88	34.63	45.63	12.38	8.00	-	7.00	3.00	11.00	5.50	577	11.50	11.38	50.25	13.39	12.13	16.54	52.34	692
CR(N) 90-2 H	40	3	29.63	52.88	4.88	34.63	45.63	15.00	-	13.13	7.00	3.00	11.00	5.50	828	13.25	12.25	50.88	-	-	-	-	-
CR(N) 90-3-2 H	40	3	33.25	56.50	4.88	38.25	49.25	15.00	-	13.13	7.00	3.00	11.00	5.50	887	13.25	12.25	54.50	-	-	-	-	-
CR(N) 90-3-1 H	50	3	33.25	58.75	4.88	38.75	50.75	16.88	-	14.50	8.00	2.00	12.00	6.25	927	13.25	12.25	55.50	-	-	-	-	-
CR(N) 90-3 H	50	3	33.25	58.75	4.88	38.75	50.75	16.88	-	14.50	8.00	2.00	12.00	6.25	927	13.25	12.25	55.50	-	-	-	-	-
CR(N) 90-4-2 H	60	3	36.88	64.38	4.88	43.00	55.25	16.88	-	14.63	9.00	1.00	12.25	7.00	1219	15.13	13.25	61.00	-	-	-	-	-
CR(N) 90-4-1 H	60	3	36.88	64.38	4.88	43.00	55.25	16.88	-	14.63	9.00	1.00	12.25	7.00	1219	15.13	13.25	61.00	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension. Weights are based on pump with TEFC motor.


* Dimensions shown for three-phase MLE motors are for 460 V versions.

★ Add 0.67 inches for CRN-H dimensions.

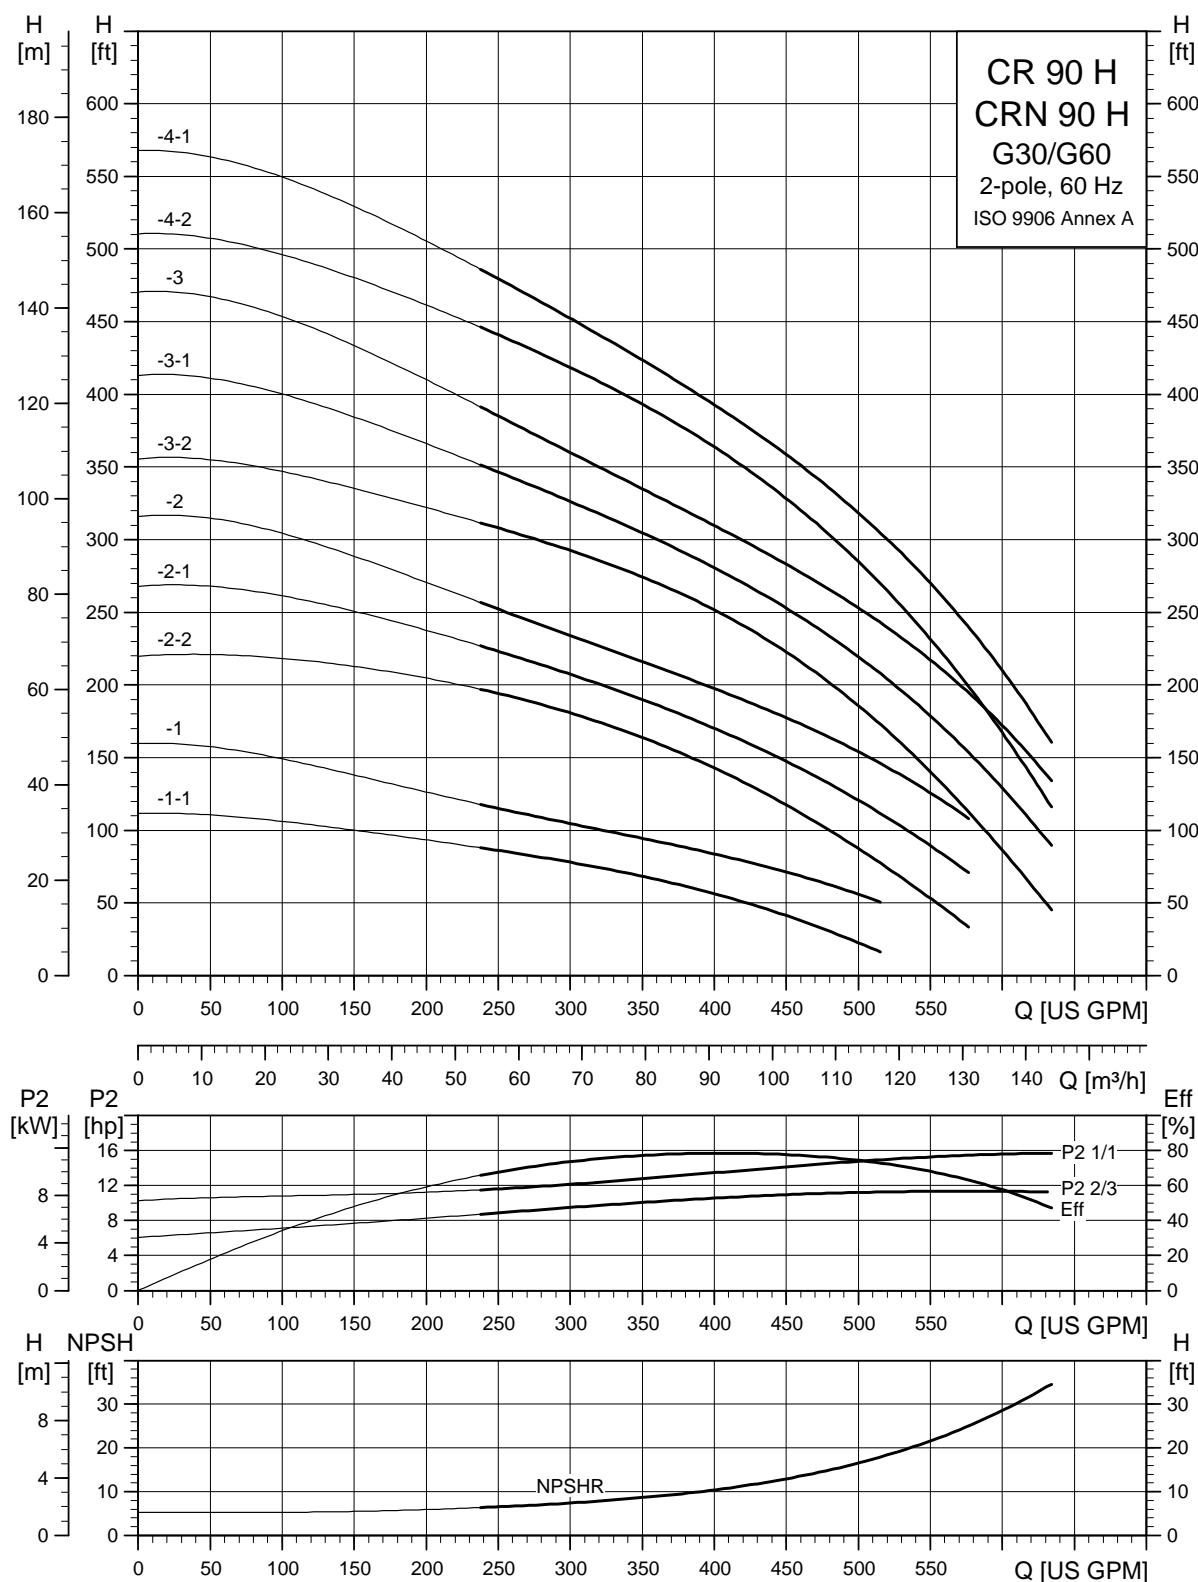CR, CRN 90 H G30/G60

TM04 6304 4610

Dimensions and weights G30 (3" x 2" x 13")

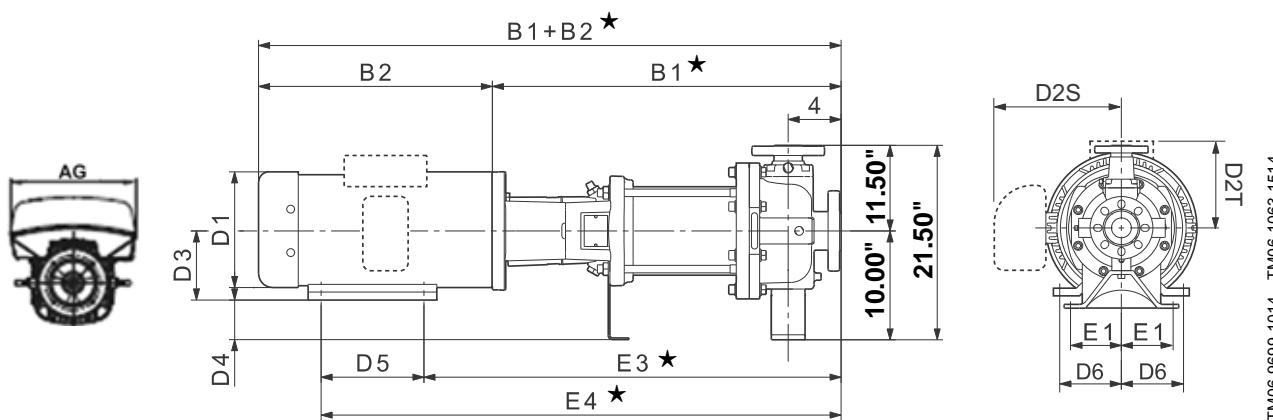


Pump type	HP	PH	Dimensions [in] TEFC										Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]			
			B1*	B1+ B2*	E1	E3*	E4*	D1	D2T	D3	D4	D5	D6	D1	D2	B1+ B2*	D1	D2					
CR(N) 90-1-1 H	15	3	26.00	44.63	4.88	31.00	39.25	12.38	8.00	-	6.25	3.75	8.25	5.00	554	10.63	8.00	44.25	10.04	9.33	13.62	41.98	508
CR(N) 90-1 H	20	3	26.00	44.63	4.88	31.00	41.00	12.38	8.00	-	6.25	3.75	10.00	5.00	548	11.50	9.00	44.00	13.39	12.13	16.54	44.78	658
CR(N) 90-2-2 H	25	3	29.63	52.00	4.88	34.63	44.13	12.38	8.00	-	7.00	3.00	9.50	5.50	586	11.50	11.38	48.75	13.39	12.13	16.54	52.35	698
CR(N) 90-2-1 H	30	3	29.63	52.00	4.88	34.63	45.63	12.38	8.00	-	7.00	3.00	11.00	5.50	612	11.50	11.38	50.25	13.39	12.13	16.54	52.35	727
CR(N) 90-2 H	40	3	29.63	52.88	4.88	34.63	45.63	15.00	-	13.13	7.00	3.00	11.00	5.50	863	13.25	12.25	50.88	-	-	-	-	-
CR(N) 90-3-2 H	40	3	33.25	56.50	4.88	38.25	49.25	15.00	-	13.13	7.00	3.00	11.00	5.50	890	13.25	12.25	54.50	-	-	-	-	-
CR(N) 90-3-1 H	50	3	33.25	58.75	4.88	38.75	50.75	16.88	-	14.50	8.00	2.00	12.00	6.25	930	13.25	12.25	55.50	-	-	-	-	-
CR(N) 90-3 H	50	3	33.25	58.75	4.88	38.75	50.75	16.88	-	14.50	8.00	2.00	12.00	6.25	930	13.25	12.25	55.50	-	-	-	-	-
CR(N) 90-4-2 H	60	3	36.88	64.38	4.88	43.00	55.25	16.88	-	14.63	9.00	1.00	12.25	7.00	1219	15.13	13.25	61.00	-	-	-	-	-
CR(N) 90-4-1 H	60	3	36.88	64.38	4.88	43.00	55.25	16.88	-	14.63	9.00	1.00	12.25	7.00	1219	15.13	13.25	61.00	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

★ Add 0.67 inches for CRN-H dimensions.

Dimensions and weights G60 (3" x 2" x 8", 3" x 2" x 10")

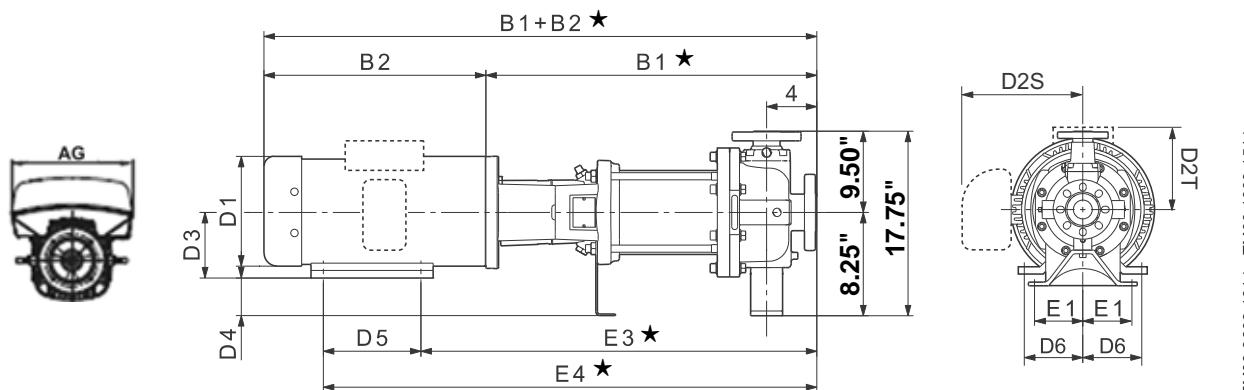


Pump type	HP PH	Dimensions [in] TEFC								Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]						
		B1★	B1+B2★	E1	E3★	E4★	D1	D2T	D2S	D3	D4	D5	D6	D1	D2	B1+B2★	D1	D2	AG	B1+B2★			
CR(N) 90-1.1 H	15	3	26.00	44.63	4.88	31.00	39.25	12.38	8.00	-	6.25	2.00	8.25	5.00	536	10.63	8.00	44.25	10.04	9.33	13.62	41.98	491
CR(N) 90-1 H	20	3	26.00	44.63	4.88	31.00	41.00	12.38	8.00	-	6.25	2.00	10.00	5.00	531	11.50	9.00	44.00	13.39	12.13	16.54	44.78	641
CR(N) 90-2-2 H	25	3	29.63	52.00	4.88	34.63	44.13	12.38	8.00	-	7.00	1.25	9.50	5.50	568	11.50	11.38	48.75	13.39	12.13	16.54	52.35	681
CR(N) 90-2-1 H	30	3	29.63	52.00	4.88	34.63	45.63	12.38	8.00	-	7.00	1.25	11.00	5.50	594	11.50	11.38	50.25	13.39	12.13	16.54	52.35	710
CR(N) 90-2 H	40	3	29.63	52.88	4.88	34.63	45.63	15.00	-	13.13	7.00	1.25	11.00	5.50	846	13.25	12.25	50.88	-	-	-	-	-
CR(N) 90-3-2 H	40	3	33.25	56.50	4.88	38.25	49.25	15.00	-	13.13	7.00	1.25	11.00	5.50	898	13.25	12.25	54.50	-	-	-	-	-
CR(N) 90-3-1 H	50	3	33.25	58.75	4.88	38.75	50.75	16.88	-	14.50	8.00	0.25	12.00	6.25	938	13.25	12.25	55.50	-	-	-	-	-
CR(N) 90-3 H	50	3	33.25	58.75	4.88	38.75	50.75	16.88	-	14.50	8.00	0.25	12.00	6.25	938	13.25	12.25	55.50	-	-	-	-	-
CR(N) 90-4-2 H	60	3	36.88	64.38	4.88	43.00	55.25	16.88	-	14.63	9.00	-0.75	12.25	7.00	1226	15.13	13.25	61.00	-	-	-	-	-
CR(N) 90-4-1 H	60	3	36.88	64.38	4.88	43.00	55.25	16.88	-	14.63	9.00	-0.75	12.25	7.00	1226	15.13	13.25	61.00	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.
Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.


★ Add 0.67 inches for CRN-H dimensions.

CR, CRN 90 H G40/G70

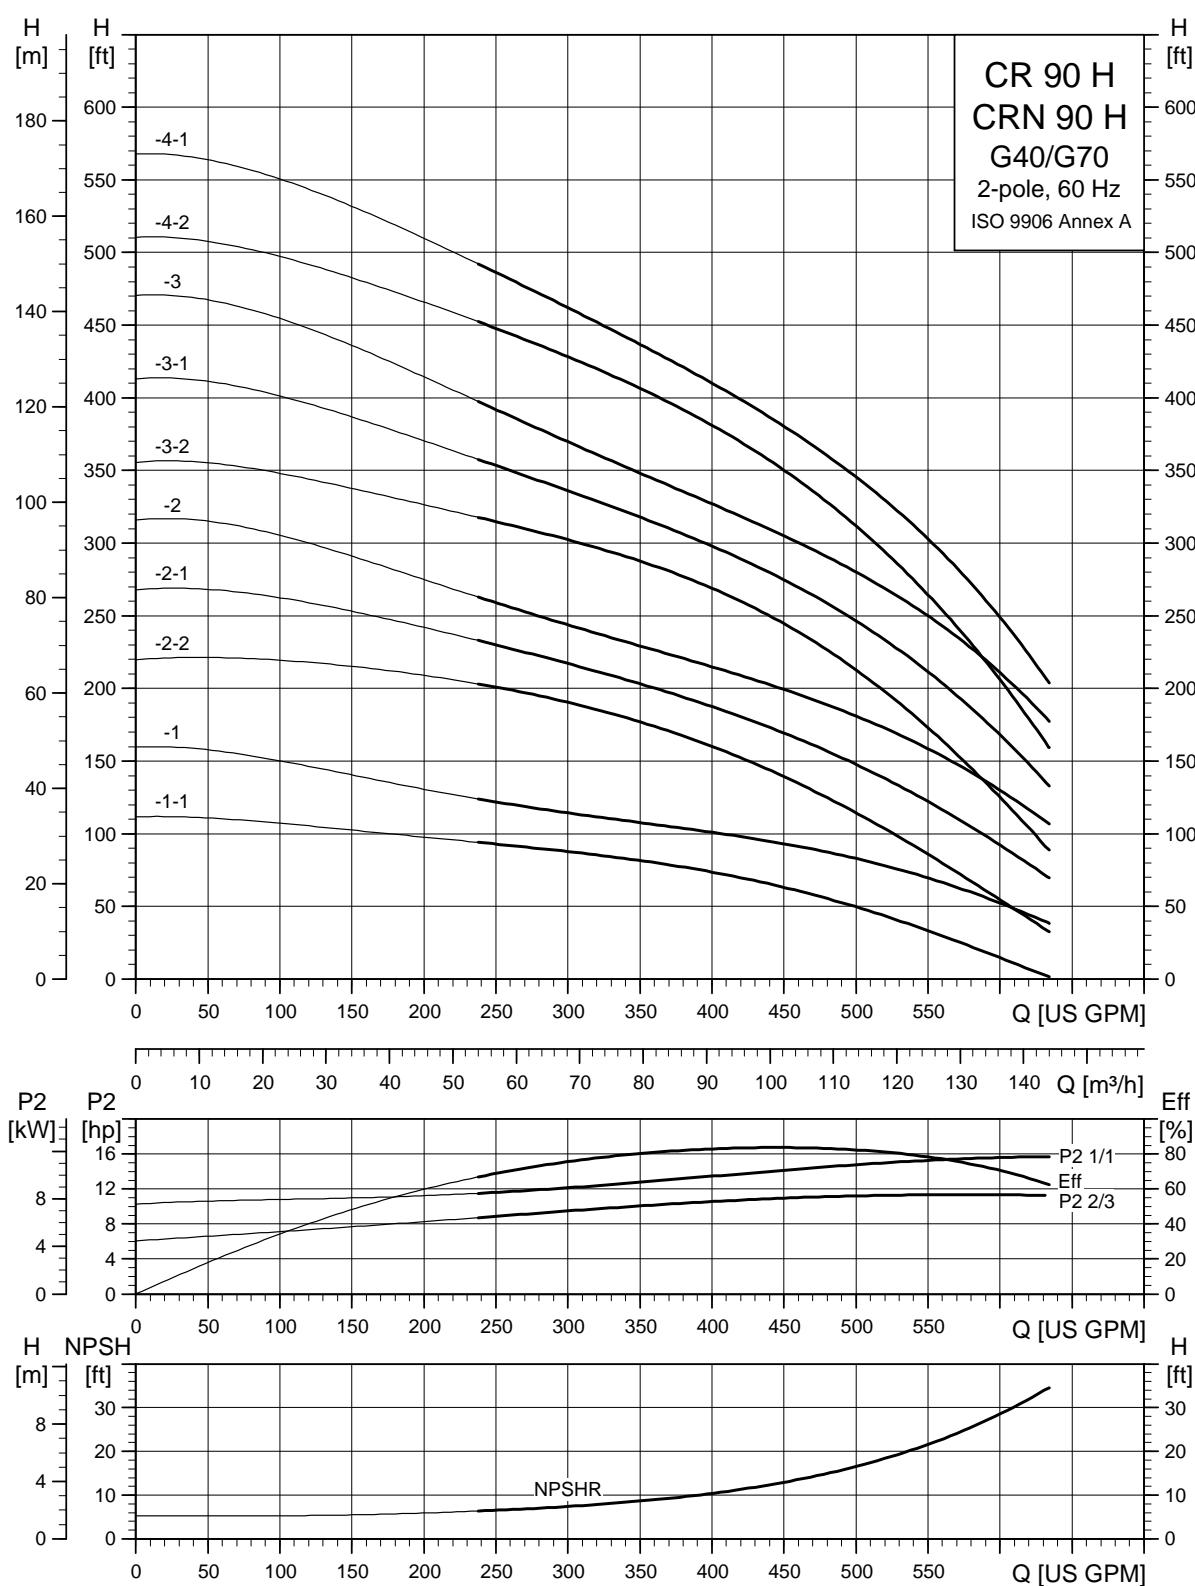

TM046063 0194

Dimensions and weights G40 (4" x 3" x 10", 4" x 3" x 13")

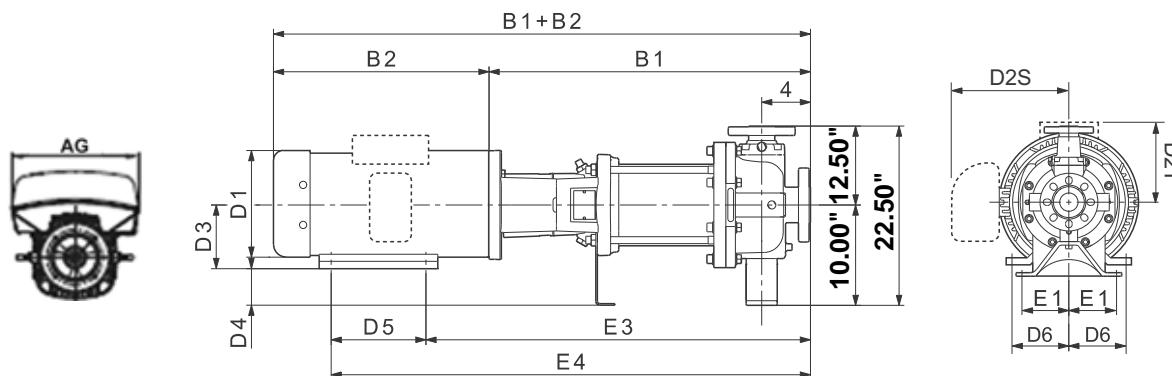

TM06 9699 1014 - TM06 1063 1514


Pump type	HP	PH	Dimensions [in] TEFC									Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*				Ship. wt. [lbs]			
			B1	B1+ B2	E1	E3	E4	D1	D2T	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2			
CR(N) 90-1-1 H	15	3	27.25	45.75	4.88	32.25	40.50	12.38	8.00	-	6.25	3.75	8.25	5.00	591	10.63	8.00	45.38	10.04	9.33	13.62	43.23	546
CR(N) 90-1 H	20	3	27.25	45.75	4.88	32.25	42.25	12.38	8.00	-	6.25	3.75	10.00	5.00	586	11.50	9.00	45.13	13.39	12.13	16.54	46.03	696
CR(N) 90-2-2 H	25	3	30.88	53.25	4.88	35.88	45.38	12.38	8.00	-	7.00	3.00	9.50	5.50	623	11.50	11.38	49.88	13.39	12.13	16.54	53.60	736
CR(N) 90-2-1 H	30	3	30.88	53.25	4.88	35.88	46.88	12.38	8.00	-	7.00	3.00	11.00	5.50	649	11.50	11.38	51.38	13.39	12.13	16.54	53.60	765
CR(N) 90-2 H	40	3	30.88	54.00	4.88	35.88	46.88	15.00	-	13.13	7.00	3.00	11.00	5.50	901	13.25	12.25	52.00	-	-	-	-	-
CR(N) 90-3-2 H	40	3	34.50	57.63	4.88	39.50	50.50	15.00	-	13.13	7.00	3.00	11.00	5.50	925	13.25	12.25	55.63	-	-	-	-	-
CR(N) 90-3-1 H	50	3	34.50	59.88	4.88	40.00	52.00	16.88	-	14.50	8.00	2.00	12.00	6.25	965	13.25	12.25	56.63	-	-	-	-	-
CR(N) 90-3 H	50	3	34.50	59.88	4.88	40.00	52.00	16.88	-	14.50	8.00	2.00	12.00	6.25	965	13.25	12.25	56.63	-	-	-	-	-
CR(N) 90-4-2 H	60	3	38.13	65.50	4.88	44.25	56.50	16.88	-	14.63	9.00	1.00	12.25	7.00	1261	15.13	13.25	62.13	-	-	-	-	-
CR(N) 90-4-1 H	60	3	38.13	65.50	4.88	44.25	56.50	16.88	-	14.63	9.00	1.00	12.25	7.00	1261	15.13	13.25	62.13	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.

Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

Dimensions and weights G70 (4" x 3" x 8", 4" x 3" x 10")

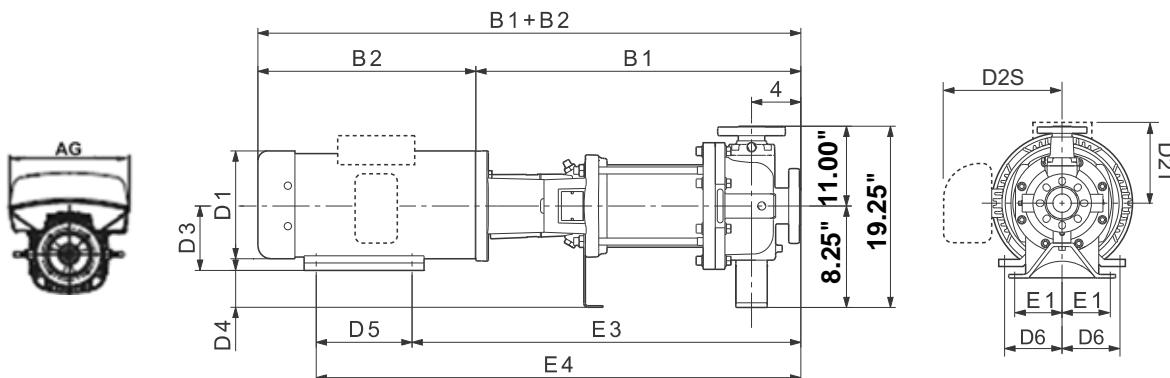

TM06 9699 1014 - TM06 1063 1514

Pump type	HP	PH	Dimensions [in] TEFC								Ship. wt. [lbs]	Dimensions [in] ODP			Dimensions [in] MLE*			Ship. wt. [lbs]					
			B1	B1+ B2	E1	E3	E4	D1	D2T	D3	D4	D5	D6	D1	D2	B1+ B2	D1	D2	AG	B1+ B2			
CR(N) 90-1-1 H	15	3	27.25	45.75	4.88	32.25	40.50	12.38	8.00	-	6.25	2.00	8.25	5.00	448	10.63	8.00	45.38	10.04	9.33	13.62	43.23	403
CR(N) 90-1 H	20	3	27.25	45.75	4.88	32.25	42.25	12.38	8.00	-	6.25	2.00	10.00	5.00	443	11.50	9.00	45.13	13.39	12.13	16.54	46.03	553
CR(N) 90-2-2 H	25	3	30.88	53.25	4.88	35.88	45.38	12.38	8.00	-	7.00	1.25	9.50	5.50	480	11.50	11.38	49.88	13.39	12.13	16.54	53.60	593
CR(N) 90-2-1 H	30	3	30.88	53.25	4.88	35.88	46.88	12.38	8.00	-	7.00	1.25	11.00	5.50	506	11.50	11.38	51.38	13.39	12.13	16.54	53.60	622
CR(N) 90-2 H	40	3	30.88	54.00	4.88	35.88	46.88	15.00	-	13.13	7.00	1.25	11.00	5.50	758	13.25	12.25	52.00	-	-	-	-	-
CR(N) 90-3-2 H	40	3	34.50	57.63	4.88	39.50	50.50	15.00	-	13.13	7.00	1.25	11.00	5.50	808	13.25	12.25	55.63	-	-	-	-	-
CR(N) 90-3-1 H	50	3	34.50	59.88	4.88	40.00	52.00	16.88	-	14.50	8.00	0.25	12.00	6.25	848	13.25	12.25	56.63	-	-	-	-	-
CR(N) 90-3 H	50	3	34.50	59.88	4.88	40.00	52.00	16.88	-	14.50	8.00	0.25	12.00	6.25	848	13.25	12.25	56.63	-	-	-	-	-
CR(N) 90-4-2 H	60	3	38.13	65.50	4.88	44.25	56.50	16.88	-	14.63	9.00	-0.75	12.25	7.00	1133	15.13	13.25	62.13	-	-	-	-	-
CR(N) 90-4-1 H	60	3	38.13	65.50	4.88	44.25	56.50	16.88	-	14.63	9.00	-0.75	12.25	7.00	1133	15.13	13.25	62.13	-	-	-	-	-

Note: Terminal box is on top of ML motors (through 30 HP). Baldor motors have terminal box on the side (40 HP and larger). Reference D2 dimension.

Weights are based on pump with TEFC motor.

* Dimensions shown for three-phase MLE motors are for 460 V versions.

14. Motor data

Motors for CR(E)-H, CRN(E)-H

Motors used in the CR(E)-H, CRN(E)-H pump range are:

- Grundfos ML or MLE motors
- Grundfos-specified **Baldor® motors**

The information in the tables below applies to the following motors type and size:

Type	PH	Motor range [HP]	Cooling
ML	3	1/3 - 30	TEFC
	1	1/3 - 10	TEFC
	3	40-60	TEFC
Baldor	3	15-60	ODP
MLE	1	1/2 - 2	TEFC
	3	1-30	TEFC

Grundfos CR(E)-H, CRN(E)-H pumps are supplied with 2-pole, NEMA C-frame motors built or selected to our rigid specifications. All CR(E)-H, CRN(E)-H pump motors have heavy-duty bearings for maximum thrust requirements.

We do not recommend that an off-the-shelf standard Baldor motor is used on a Grundfos pump. Ideally, the best motor choice would be the Grundfos-specified motor.

Other motor types are available (i.e. explosion-proof, Mill and Chem Duty, high efficiency, etc.); consult your local Grundfos company for more information.

Pumps supplied by Grundfos Canada are normally supplied with motors from other manufacturers. The 575 V motors also meet NEMA Premium efficiency standards. Dimensions and data will vary; contact your local Grundfos company for more information.

All values are subject to change without notice.

Grundfos ML motor



GR 7845

Baldor motor



Grundfos MLE motor



GR 8972_P

TEFC motors (totally enclosed fan cooled, constant speed)

Product number	HP	PH	Frame size	SF	Supply voltage [V]	Eff. [%]	Efficiency rating	Temp class	KVA	FLA	SFA	LRA	Motor
84Z04526	1/3	1	56C	1.35	115/230	55	Not defined	B	K	6/3	7.6 / 3.8	28/14	Baldor
97567717	1/3	3	56C	1.35	208-230/460	78.5	Not defined	F	A	1.12 - 1.1 / 0.55	1.5 - 1.45 / 0.75	7.1 - 7.7 / 3.9	ML
84Z04527	1/2	1	56C	1.60	115/208-230	62	Not defined	B	K	7.4 / 4.1 - 3.7	9.8 / 5.2 - 4.9	39 / 21.6 - 19.5	Baldor
97568081	1/2	3	56C	1.25	208-230/460	78.5	Not defined	F	K	1.64 - 1.55 / 0.78	2.0 - 1.9 / 0.95	9.7 - 10.1 / 5.1	ML
84Z04528	3/4	1	56C	1.25	115/230	66	Not defined	B	K	9.6 / 4.8	11.4 / 6	56 / 31-28	Baldor
97678090	3/4	3	56C	1.25	208-230/460	80	Not defined	F	J	2.4 - 2.3 / 1.2	2.9 - 2.75 / 1.4	14.2 - 15.0 / 7.8	ML
84Z04529	1	1	56C	1.25	115/230	66	Not defined	B	K	12 / 6	14.4 / 7.2	77 / 38.5	Baldor
97568102	1	3	56C	1.25	208-230/460	80	NEMA Premium	F	K	3.25 - 3.35 / 1.68	4.0 - 3.9 / 1.95	19.2 - 21.8 / 11.0	ML
84Z04530	1 1/2	1	56C	1.30	115/208-230	71	Not defined	B	K	17 / 9.5 - 8.6	20.4 / 11.3 - 10.2	106 / 58.6 - 53	Baldor
97568103	1 1/2	3	56C	1.15	208-230/460	84	NEMA Premium	F	L	4.7 - 4.6 / 2.3	5.2 - 5.1 / 2.55	33.9 - 36.8 / 18.4	ML
84Z04531	2	1	56C	1.15	115/208-230	74	Not defined	B	K	23 / 12.7 - 11.5	25.4 / 12.7 - 12.7	156/78	Baldor
97568104	2	3	56C	1.15	208-230/460	85.5	NEMA Premium	F	M	5.7 - 5.4 / 2.7	6.55 - 6.1 / 3.05	46.2 - 48.6 / 24.3	ML
84Z04532	3	1	182TC	1.15	115/208-230	75	Not defined	F	H	29 / 16 - 14.5	31.8 / 18 - 15.9	172/95-86	Baldor
97568105	3	3	182TC	1.15	208-230/460	86.5	NEMA Premium	F	M	8.4 - 7.7 / 3.9	9.5 - 8.6 / 4.3	79.0 - 80.1 / 40.6	ML
84Z04533	5	1	213TC	1.15	230	80	Not defined	F	J	22	25	170	Baldor
97568106	5	3	182TC	1.15	208-230/460	88.5	NEMA Premium	F	M	13.8 - 13.0 / 6.5	15.6 - 14.6 / 7.3	124.2 - 128.7 / 64.4	ML
84Z04534	7 1/2	1	213TC	1.15	208-230	82	Not defined	F	F	33.8 - 31	35.5 - 33.8	244-220	Baldor
97568109	7 1/2	3	213TC	1.15	208-230/460	90	NEMA Premium	F	N	20.4 - 19.4 / 9.7	23 - 21.5 / 10.8	191.8 - 201.8 / 100.9	ML
84Z04535	10	1	213TC	1.15	230	85.5	Not defined	F	F	40	46	284	Baldor
97568110	10	3	213TC	1.15	208-230/460	90.2	NEMA Premium	F	M	26.5 - 25.5 / 12.8	30.5 - 28.5 / 14.5	238.5 - 252.5 / 126.8	ML
84Z04951	15	3	254TCZ	1.15	230/460	91	NEMA Premium	F	K	34.4 / 17.2	40/20	336-304/152	Baldor
84Z04952	20	3	256TCZ	1.15	230/460	91	NEMA Premium	F	H	46/23	52/26	412/206	Baldor
84Z04953	25	3	284TSCZ	1.15	230/460	93	NEMA Premium	F	J	56/28	63/31.5	502-454/227	Baldor
84Z04954	30	3	286TSCZ	1.15	230/460	93	NEMA Premium	F	J	66/33	76/38	495-448/224	Baldor
84Z04955	40	3	286TSCZ	1.15	230/460	93.6	NEMA Premium	F	L	90/45	104/52	728-658/329	Baldor
84Z04957	50	3	326TSCZ	1.15	230/460	93	NEMA Premium	F	H	112/56	128/64	810/405	Baldor
84Z04958	60	3	364TSCZ	1.15	230/460	93.6	NEMA Premium	F	J	136/68	154/77	950/475	Baldor

We recommend that you verify all electrical data for motors on the motor nameplate.

ODP Motors (open drip proof, constant speed)														
Product number	Power [HP]	PH	Frame size	SF	Supply voltage [V]	Eff. [%]	Efficiency rating	Temp. class	KVA	FLA	SFA	LRA	Motor	
84Z04963	15	3	254TCZ	1.15	230/460	91	NEMA Premium	F	J	34/17	39.8 / 18.9	272/136	Baldor	
84Z04964	20	3	254TCZ	1.15	230/460	91	NEMA Premium	F	G	48/24	54/27	306/153	Baldor	
84Z04965	25	3	286TSCZ	1.15	230/460	91.7	NEMA Premium	F	G	56/28	34/32	374/187	Baldor	
84Z04966	30	3	284TSCZ	1.15	230/460	91.7	NEMA Premium	F	F	66/33	76/38	480/240	Baldor	
84Z04967	40	3	286TSCZ	1.15	230/460	94.1	NEMA Premium	F	H	90/45	104/52	542/271	Baldor	
84Z04968	50	3	324TSCZ	1.15	230/460	94.5	NEMA Premium	F	J	108/54	124/62	542/271	Baldor	
84Z04969	60	3	326TSCZ	1.15	230/460	94.5	NEMA Premium	F	H	130/165	148/74	542/271	Baldor	

MLE Motors (integrated variable frequency drive)

HP	Voltage [V]	PH	NEMA frame Size	Service factor	Motor full load efficiency [%]	Full load current amps** [A]	Service factor current amps [A]	Power factor	Full load speed [rpm]	Sound pressure level [dB(A)]
1/2 ¹⁾	200-240	1	56C	1	84*	2.40 - 2.10	-	0.96	3400	58
3/4 ¹⁾	200-240	1	56C	1	85.3*	3.45 - 2.90	-	0.98	3400	58
1 ¹⁾	200-240	1	56C	1	85.2*	4.70 - 3.90	-	0.99	3400	58
1 ¹⁾	440-480	3	56C	1.25	86.4*	1.65	2.10	0.73	3480	58
1 1/2 ¹⁾	200-240	1	56C	1	86.9*	6.70 - 5.60	-	0.99	3400	58
1 1/2 ¹⁾	200-240	3	56C	1.15	89.3*	4.00 - 3.40	4.60 - 3.90	0.91	3480	55
1 1/2 ¹⁾	440-480	3	56C	1.15	89.6*	2.05	2.40	0.84	3480	58
2 ¹⁾	200-240	1	56C	1	87.4*	9.10 - 7.60	-	0.99	3400	64
2 ¹⁾	200-240	3	56C	1.00	88.90*	5.40 - 4.50	-	0.92	3480	55
2 ¹⁾	440-480	3	56C	1.15	89.4*	2.65	3.00	0.87	3480	64
3 ¹⁾	200-240	3	182TC	1.15	88.70*	7.90 - 6.60	9.10 - 7.60	0.94	3480	62
3 ¹⁾	440-480	3	182TC	1.15	90.7*	3.8	4.30	0.89	3480	64
5 ¹⁾	200-240	3	182TC	1.15	90.90*	13.2 - 10.9	14.90 - 12.40	0.94	3480	66
5 ¹⁾	440-480	3	182TC	1.15	92.5*	6.20 - 5.80	7.00 - 6.60	0.90	3500	60
7 1/2 ¹⁾	200-240	3	213TC	1.15	90.20 *	20.0 - 16.6	23.0 - 19.3	0.94	3480	70
7 1/2 ¹⁾	440-480	3	213TC	1.15	92.4*	9.10 - 8.50	10.4 - 9.70	0.91	3500	60
10 ¹⁾	440-480	3	213TC	1.15	92.5*	12.4 - 11.5	14.2 - 13.0	0.91	3500	65
15 ¹⁾	440-480	3	254TC	1.15	93.2*	17.9 - 16.6	20.5 - 19.0	0.92	3500	65
20 ²⁾	460-480	3	256TC	1.15	91	24.00	27.50	0.89	3540	68
25 ²⁾	460-480	3	284TC	1.15	91.7	30.50	35.00	0.88	3540	70
30 ²⁾	460-480	3	286TC	1.15	91.7	36.50	42.00	0.88	3540	70

¹⁾ Permanent-magnet motor²⁾ Asynchronous motor

* Efficiency of motor and VFD

** At 460 volts for 460-480 volt motors


15. Accessories

Baseplate

Grundfos CR(E)-H, CRN(E)-H baseplates can be selected by using the information on the following pages. Once you have selected your pump you can use the pump data to select the proper baseplate and motor mounting kit. You will need to know the flange connection code, motor frame size and the E4 pump length.


Based on this information you can select your baseplate and motor mounting kit number.

Baseplate dimensional sketch, CR(E), CRN(E) 1s, 1, 3, 5 H

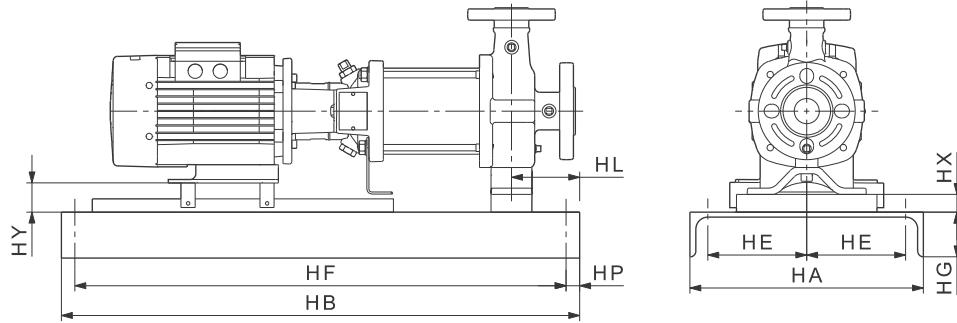


TM04 4639 1809

Baseplate dimensional sketch, CR(E), CRN(E) 10, 15, 20 H

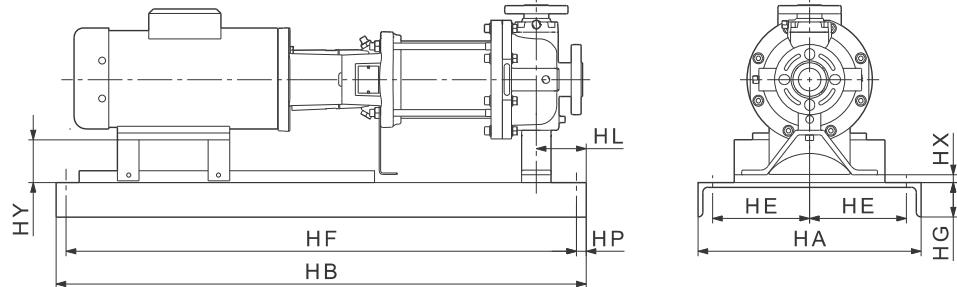

TM04 4640 1809

Baseplate dimensional sketch, CR(E), CRN(E) 32, 45, 64, 90 H

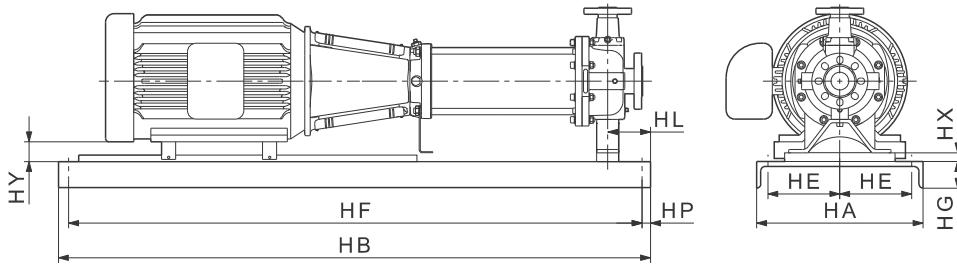

TM04 4641 1809

You will need to make sure that your pump length will fit on the standard baseplate by comparing the E4 - 4" dimension to the maximum pump length. If it will not, you can select the long baseplate (XLBP). The XLBP baseplates are longer than ANSI B73.1 baseplates but have floor mounting holes at the standard lengths.

XLBP baseplates also have additional holes near the end as shown in the dimensional table.

The baseplates are constructed from ASTM A36 steel alloy.

Baseplate selection

Baseplate number	NEMA frame	Flange size	CR(E), CRN(E) 1s H to CR 20 H max. pump length (E4 is the inlet flange to rear motor foot line) ¹⁾ [inches]	CR(E), CRN(E) 32 H to 64 H, CR 90 H max. pump length (foot to rear motor hole) ¹⁾ [inches]
			[inches]	[inches]
139	56T-182T	GA, GB, GC	27.5	23.5
148	213T-256T	GA, GB, GC	37	33
153	286T-364T	GA, GB, GC	42	38
245	56T-182T	G05-G70	34.5	30.5
252	213T	G05-G70	40.5	36.5
258	254T-286T	G05-G70	46.5	42.5
264	324T-364T	G05-G70	53	49
XLBP1 ^{2, 3)}	56T-182T	139, 245 BP	4)	4)
XLBP2 ^{2, 3)}	213T-256T	148, 252 BP	4)	4)
XLBP3 ^{2, 3)}	254T-364T	258, 264 BP	4)	4)
XLBP4 ^{2, 3)}	284T-364T	153 BP	4)	4)

Notes

1. If E4 - 4" > maximum pump length, select XLBP (dimensions are in inches).
2. XLBP1 = longer version of 139 and 245 baseplate
 XLBP2 = longer version of 148 and 252 baseplate
 XLBP3 = longer version of 258 and 264 baseplate
 XLBP4 = longer version of 153 baseplate
3. HF on long baseplate versions has bolt holes to use existing ANSI anchor bolts as well as additional bolt holes 1 1/4" from the end.
4. These long baseplates will accommodate all oversize pumps as listed.

Baseplate dimensions and weight

Baseplate number	NEMA	Flange size	HA	HB	HE	HF ³⁾	HG	Bolt hole diameter	HL	HP	HX NEMA	HY NEMA
139	56T	GA, GB, GC	12	39	4.5	36.5	3	0.75	4.5	1.25	0.75	2.50
	182T	GA, GB, GC	12	39	4.5	36.5	3	0.75	4.5	1.25	0.75	1.50
148	213T	GA, GB, GC	15	48	6	45.5	3.5	0.75	4.5	1.25	0.88	0.88
	256T	GA, GB, GC	15	48	6	45.5	3.5	0.75	4.5	1.25	1.88	0.88
153	286T	GA, GB, GC	18	53	7.5	50.5	4	0.75	4.5	1.25	3.63	1.88
	324T	GA, GB, GC	18	53	7.5	50.5	4	0.75	4.5	1.25	3.63	0.88
	364T	GA, GB, GC	18	53	7.5	50.5	4	0.75	4.5	1.25	5.06	1.31
245	56T	G05, G10, G50, G60, G70, G22, G33, G44	12	45	4.5	42.5	3	0.75	4.5	1.25	0.75	5.50
	56T	G20, G30, G40	12	45	4.5	42.5	3	0.75	4.5	1.25	0.75	7.25
	182T	G05, G10, G50, G60, G70, G22, G33, G44	12	45	4.5	42.5	3	0.75	4.5	1.25	0.75	4.50
	182T	G20, G30, G40	12	45	4.5	42.5	3	0.75	4.5	1.25	0.75	6.25
252	213T	G05, G10, G50, G60, G70, G22, G33, G44	15	52	6	49.5	3.5	0.75	4.5	1.25	0.88	3.88
	213T	G20, G30, G40	15	52	6	49.5	3.5	0.75	4.5	1.25	0.88	5.63
258	254T	G05, G10, G50, G60, G70, G22, G33, G44	18	58	7.5	55.5	4	1	4.5	1.25	0.69	2.69
	254T	G20, G30, G40	18	58	7.5	55.5	4	1	4.5	1.25	0.69	4.44
	286T	G05, G10, G50, G60, G70, G22, G33, G44	18	58	7.5	55.5	4	1	4.5	1.25	0.69	1.94
	286T	G20, G30, G40	18	58	7.5	55.5	4	1	4.5	1.25	0.69	3.69
264	324T	G05, G10, G50, G60, G70, G22, G33, G44	18	64	7.5	61.5	4	1	4.5	1.25	1.31	1.56
	324T	G20, G30, G40	18	64	7.5	61.5	4	1	4.5	1.25	1.31	3.31
	364T	G05, G10, G50, G60, G70, G22, G33, G44	18	64	7.5	61.5	4	1	4.5	1.25	2.31	2.56
	364T	G20, G30, G40	18	64	7.5	61.5	4	1	4.5	1.25	1.31	2.31
XLBP1	56-182T	139, 245 BP	12	59	These dimensions will be the same as the baseplate number they are replacing above.							
XLBP2	213-256T	148, 252 BP	15	70	The overall length is longer to accommodate longer pumps.							
XLBP3	254T-364T	258, 264 BP	18	94.75	See notes 1 to 4 below.							
XLBP4	284T-364T	153 BP	18	94.75								


All dimensions are in inches.

Notes

- If E4 - 4" > maximum pump length, select XLBP (dimensions are in inches).
- XLBP1 = longer version of 139 and 245 baseplate
XLBP2 = longer version of 148 and 252 baseplate
XLBP3 = longer version of 258 and 264 baseplate
XLBP4 = longer version of 153 baseplate
- HF on long baseplate versions has bolt holes to use existing ANSI anchor bolts as well as additional bolt holes 1 1/4" from the end.
- These long baseplates will accommodate all oversize pumps as listed.

Baseplate and motor mounting kits

Baseplate	Kit description	Product number	Ship weight [lbs]
BP 139	Kit, BP139 56T GA/B/C	97534517	122
	Kit, BP139 182T GA/B/C	97534518	118
BP 148	Kit, BP148 213T GA/B/C	97534520	190
	Kit, BP148 254T GA/B/C	97534531	200
BP 153	Kit, BP153 284T GA/B/C	97534532	272
	Kit, BP153 324T GA/B/C	97534533	264
	Kit, BP153 364T GA/B/C	97534534	284
BP 245	Kit, BP245 56T G05/10/50/60/ 70/22/33/44	97534535	152
	Kit, BP245 182T G05/10/50/60/ 70/22/33/44	97534536	150
	Kit, BP245 56T G20/30/40	97534537	162
	Kit, BP245 182T G20/30/40	97534538	160
BP 252	Kit, BP252 213T G05/10/50/60/ 70/22/33/44	97534539	222
	Kit, BP252 213T G20/30/40	97534540	228
BP 258	Kit, BP258 254T G05/10/50/60/ 70/22/33/44	97534543	299
	Kit, BP258 284T G05/10/50/60/ 70/22/33/44	97534544	287
	Kit, BP258 254T G20/30/40	97534545	307
	Kit, BP258 284T G20/30/40	97534546	307
BP 264	Kit, BP264 324T G05/10/50/60/ 70/22/33/44	97534548	332
	Kit, BP264 364T G05/10/50/60/ 70/22/33/44	97534550	356
	Kit, BP264 324T G20/30/40	97534571	332
	Kit, BP264 364T G20/30/40	97534572	334
XLBP1	Kit, BP139 56T GA/B/C	97534573	167
	Kit, BP139 182T GA/B/C	97534574	163
	Kit, BP245 56T G05/10/50/60/ 70/22/33/44	97534575	180
	Kit, BP245 182T G05/10/50/60/ 70/22/33/44	97534576	178
	Kit, BP245 56T G20/30/40	97534577	190
	Kit, BP245 182T G20/30/40	97534578	188
XLBP2	Kit, BP148 213T GA/B/C	97573875	262
	Kit, BP148/252 254T GA/B/C	97534579	275
	Kit, BP252 213T G05/10/50/60/ 70/22/33/44	97573873	278
XLBP3	Kit, BP252 213T G20/30/40	97573874	284
	Kit, BP258/264 254T G05/10/ 50/60/70/22/33/44	97573876	461
	Kit, BP258/264 284T G05/10/ 50/60/70/22/33/44	97573877	449
	Kit, BP258/264 254T G20/30/40	97573878	469
	Kit, BP258/264 284T G20/30/40	97573879	469
	Kit, BP258/264 324T G05/10/ 50/60/70/22/33/44	97534580	461
XLBP4	Kit, BP258/264 364T G05/10/ 50/60/70/22/33/44	97534591	470
	Kit, BP258/264 324T G20/30/40	97534592	476
	Kit, BP258/264 364T G20/30/40	97534593	463
	Kit, BP153 284T GA/B/C	97534594	453
XLBP4	Kit, BP153 324T GA/B/C	97534595	445
	Kit, BP153 364T GA/B/C	97534596	465

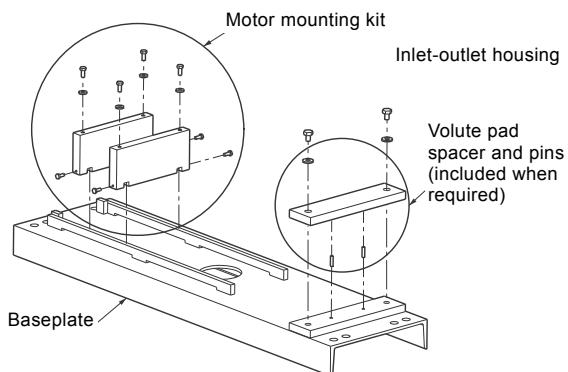

TM04 4605 2109

Fig. 63 Baseplate and motor mounting kit

Pipe connection

Various sets of counterflanges are available for pipe connection.

Counterflanges for CR(E)-H, CRN(E)-H

A set consists of two counterflanges, two gaskets, bolts and nuts.

Pump type	Pipe connection (inlet and outlet)	Cast iron press. class	Product number	AISI 316 SS Press. class	Product number
GA	1.5" x 1" NPT	Threaded ANSI 125 lb.	97642565	Threaded ANSI 150 lb.	97698645
G05	2" x 1" NPT		97642567		97698647
GB, G50, G20	3" x 1.5" NPT		97642571		97698649
GC, G10, G60, G30	3" x 2" NPT		97642574		97698651
G70, G40	4" x 3" NPT		97642576		97698653
G22	2" x 2" NPT		97642568		97743809
G33	3" x 3" NPT		559601		91121953
G44	4" x 4" NPT		579801		0ID00148
GA	1.5" x 1" NPT		96967594		97698646
G05	2" x 1" NPT		96967595		97698648
GB, G50, G20	3" x 1.5" NPT	Threaded ANSI 250 lb.	97658571	Threaded ANSI 300 lb.	97698650
GC, G10, G60, G30	3" x 2" NPT		97658572		97698652
G70, G40	4" x 3" NPT		97658574		97698654
G22	2" x 2" NPT		97757976		97743810
G33	3" x 3" NPT		97658573		97743812
G44	4" x 4" NPT		360028		97822330

The 3" and 4" 125/150 lb. flanges and the 4" 250/300 lb. flanges on the pumps are standard through-hole ANSI flanges. All other CR(E)-H, CRN(E)-H pump flanges are threaded and will require shorter than standard bolts. Recommended bolt sizes are shown below.

Press. class	Flange size	Qty. bolts	Required bolts	Standard hardware
125/150 lb	1"	4	1/2-13 x 2	
	1.5"	4	1/2-13 x 2	
	2"	4	5/8-11 x 2.5	
	3"	4	5/8-11 x 3	•
	4"	8	5/8-11 x 3	•
250/300 lb.	1"	4	5/8-11 x 2.25	
	1.5"	4	3/4-10 x 2.5	
	2"	8	5/8x11 x 2.5	
	3"	8	3/4-10 x 3.25	
	4"	8	3/4-10 x 3.75	•

Potentiometer for CRE, CRIE, CRNE

Potentiometer for setpoint setting and start/stop of the CRE, CRIE, CRNE pump.

Product	Product number
External potentiometer with cabinet for wall mounting	625468

LiqTec

Description

LiqTec features:

- Protects the pump against dry-running.
- Protects the pump against too high liquid temperature (+266 °F ± 9 °F (130 °C ± 5 °C)).
- Has a fail-safe design. If the sensor, sensor cable, electronic unit or power supply fails, the pump stops immediately.
- The LiqTec is **not** to be used with the MGFlex motor.

Mounting the LiqTec sensor

The LiqTec can be fitted to a DIN rail to be incorporated in a control cabinet.

Electrical connection

Example of electrical connection, see page 129.

Calibration of sensor and controller

Follow the procedure on the next page.

Functions

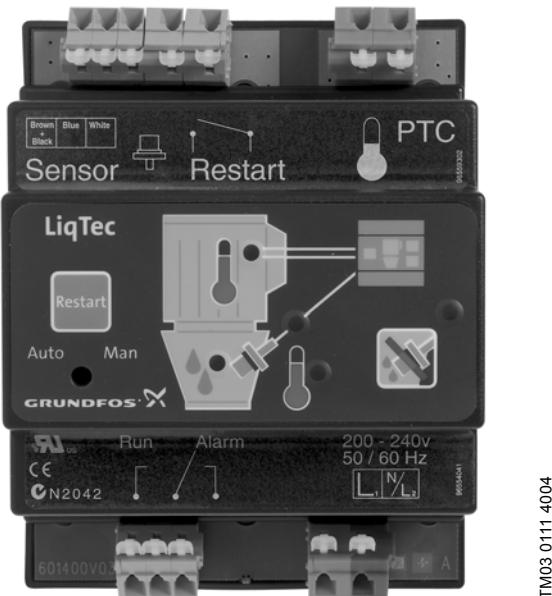


Fig. 64 LiqTec functions

1. **Connection for dry-running sensor**
2. **Connection for external restarting**
3. **Motor PTC**
Green light indicates OK or short-circuited terminals.
Red light indicates too high motor temperature. The alarm relay is activated.

4. Connection for PTC sensor

This input is not used in connection with E-pumps as the variable frequency drive protects the motor against overload.

5. Sensor indicator light

Red light indicates defective sensor or cable. The alarm relay is activated.

6. Deactivation of the dry-running monitoring function

Press the button to deactivate the dry-running monitoring function. Red flashing light. The PTC monitoring function is still active.

Press [Restart] to reactivate the dry-running monitoring function.

7. High liquid temperature indicator light

Red light indicates too high liquid temperature (+266 °F ± 9 °F (130 °C ± 5 °C)). The alarm relay is activated.

8. Supply voltage

200-240 VAC, 50/60 Hz and 80-130 VAC 50/60 Hz.

9. Dry-running indicator light

Green light indicates OK (liquid in pump).

Red light indicates dry running (no liquid in pump). The alarm relay is activated.

10. Alarm/Run relay output

Potential-free changeover contact.

Maximum contact load: 250 V, 1 A, AC (inductive load).

11. Auto/Man

Changeover between automatic and manual restarting.

The default setting is "Man".

Changeover is carried out by means of a small screwdriver.

When "Auto" has been selected, the alarm indication will automatically be reset 10 to 20 seconds after detection of liquid.

12. Restart

Press [Restart] to restart the pump. The button has no influence on the PTC monitoring.

Calibration of sensor and controller

Step	Action	Result
1	Connect the sensor to pos. 1 on the controller and connect the power supply to pos. 8 on the controller. See page 130.	
2	Submerge the sensor into the pumped liquid. The pumped liquid and the air temperature are to be +70 °F. Note: It is important that the pumped liquid is stagnant as the calibration will be misleading if the sensor is cooled by flowing water.	
3	Press the buttons at pos. 6 and pos. 12 on the controller for approximately 20 seconds.	All red indicator lights (except pos. 7) start flashing.
4	When the green indicator lights at pos. 3 and pos. 9 on the controller are constantly on, release the buttons at pos. 6 and pos. 12.	The calibration is completed.

Further information

Information related to IEC 60730-1:

- Software class A
- Pollution degree 2
- Type 1.

The LiqTec has been cURus-approved according to UL 508.

Maximum pressure: 580 psi (40 bar).

Maximum liquid temperature: (+266 °F ± 9 °F (130 °C ± 5 °C)).

Maximum ambient temperature: +131 °F (+55 °C).

Power consumption: 5 Watt.

Enclosure class: IPX0.

Maximum cable length: 65.6 ft (20 meters).

Standard cable: 16.4 ft (5 meters).


Extension cable: 49.2 ft (15 meters).

Note:

The LiqTec is not be connected to the PTC sensor. Assemble a jumper wire between the two terminals at pos. 4 on the controller.


The MLE motor software provides protection against high motor temperature.

The LiqTec is designed for DIN rail mounting in a control cabinet.



Dry-running protection	Single phase power supply	LiqTec	Sensor 1/2"	Cable 16.4 ft (5 m)	Extension cable 49.2 ft (15 m)	Product number
	200-240 VAC	•	•	•	-	96556429
	80-130 VAC	•	•	•	-	96556430
	-	-	-	-	•	96443676
	-	-	•	•	-	96556427

Connection of E-pump to LiqTec

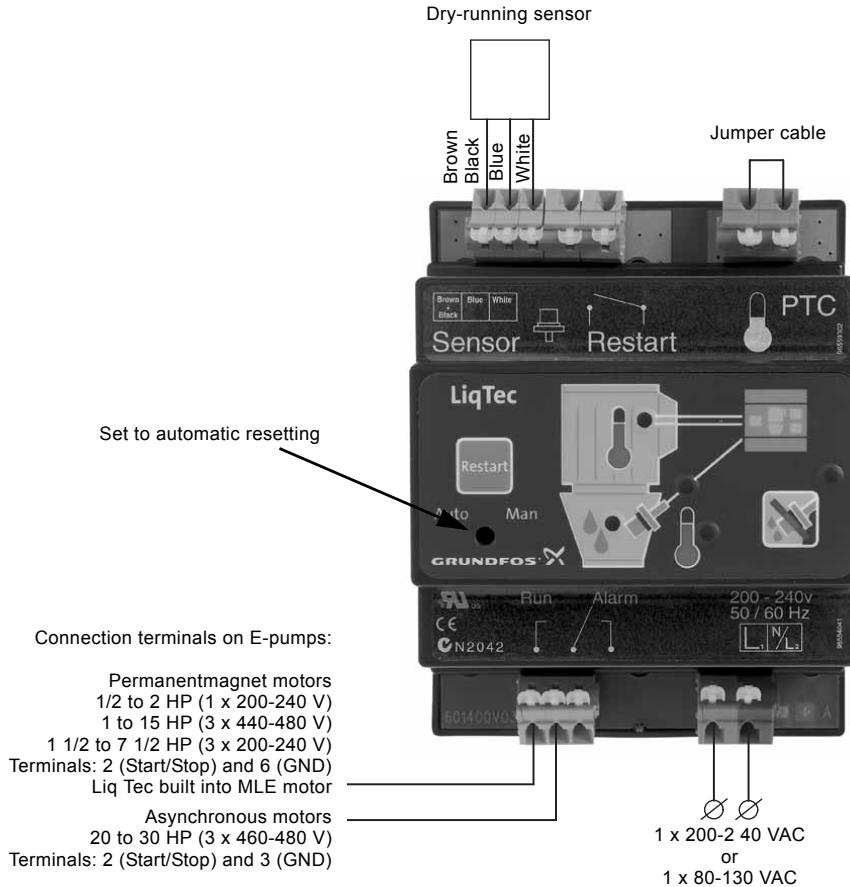

TM03 0437 5104

Fig. 65 Connection of E-pump to LiqTec

Setting the digital input

The digital input must be set to "External fault" via R100.



Note: After dry-running fault, the E-pump must be restarted manually.

Disposal

This product or parts of it must be disposed of in an environmentally sound way:

1. Use the public or private waste collection service.
2. If this is not possible, contact the nearest Grundfos company or service workshop.

Pressure sensor

Accessory	Supplier	Type	Pressure range [psi (bar)]	Product number EPDM	Product number FKM
Pressure sensors			0-87 (0-6)	97748922	97748953
Pressure transmitter with 6 ft screened cable	Grundfos	RPI	0-145 (0-10)	97748923	97748954
Connection: 1/4" - 18 NPT			0-232 (0-16)	97748924	97748955
			0-362 (0-25)	97748925	97748956




TM04 7865 2510

Technical data

Pressure sensor				
Product number	97748922	97748923	97748924	97748925
	97748953	97748954	97748955	97748956
Pressure range [psi (bar)]	0-87 (0-6)	0-145 (0-10)	0-232 (0-16)	0-362 (0-25)
Maximum operating pressure [psi (bar)]		870 (60)		
Supply voltage		12.5 - 30 VDC		
Output signal [mA]		4-20		
Load impedance		60 Ω at 12.5 VDC		
		100 Ω at 13.3 V		
		Max 900 Ω at 30 VDC		
Response time		100 ms typical 50 ms		
		1/1000 FS		
Resolution		+32 to +176 °F +/- 2.0 % FS		
Accuracy		-22 to +212 °F +/- 2.5 % FS		
Operation temperature		-22 to +212 °F (-30 to +100 °C)		
Ambient temperature		-13 to +140 °F (-25 to 60 °C)		
Wetted parts material		AISI 316 L		
Housing material		AISI 316 L		
Enclosure		IP 67		
Weight [lb (kg)]		0.3 (14)		
EMC -		EN 61326-1		
Pressure - mechanical connection		Adaptor solution for 1/2" and 1/4" NPT		
Markings				

Dimensions

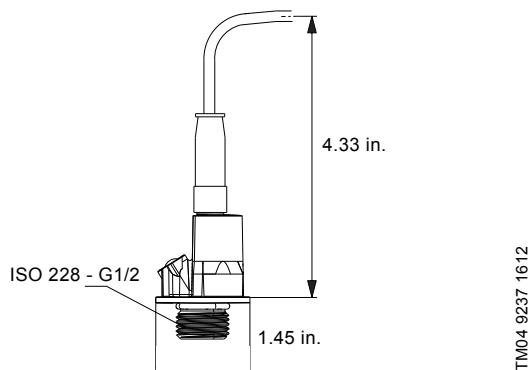

TM04 9237 1612

Fig. 66 Dimensions RPI transmitter

Pressure sensor

Accessory	Supplier	Type	Pressure range [psi (bar)]	Product number
			0-87 (0-6)	91136169
			0-145 (0-10)	91136170
Pressure sensors			0-232 (0-16)	91136171
Pressure transmitter with 6 ft screened cable Connection: 1/4" - 18 NPT	Danfoss	MBS3000	0-362 (0-25)	91136172
			0-580 (0-40)	91136173
			0-870 (0-60)	91136174



Technical data

Pressure sensor	91136169	91136170	91136171	91136172	91136173	91136174
Product number	91136169	91136170	91136171	91136172	91136173	91136174
Pressure range [psi (bar)]	0-87 (0-6)	0-145 (0-10)	0-232 (0-16)	0-362 (0-25)	0-580 (0-40)	0-870 (0-60)
Maximum operating pressure [psi (bar)]	300 (20.1)	300 (20.1)	750 (51.7)	1450 (100)	2900 (200)	2900 (200)
Supply voltage			9-32 VDC			
Output signal [mA]			4-20			
Insulation resistance			> 100 MΩ at 100 V			
Accuracy, typical +/- FS [%]			0.5 %			
Response time, maximum [ms]			4 ms			
Medium temperature range [°F (°C)]			-40 °F to +185 °F (-40 °C to +85 °C)			
Ambient temperature range [°F (°C)]			-40 °F to +185 °F (-40 °C to +85 °C)			
Wetted parts, material			AISI 316L			
Housing material			AISI 316L			
Enclosure rating			IP65			
Weight [lb (kg)]			0.3 (0.14)			
EMC - Emission			EN 61000-6-3			
EMC Immunity			EN 61000-6-2			
Pressure connection			NPT 1/4-18			
CE-marked			EMC protected in accordance with EU EMC Directive			

Dimensions

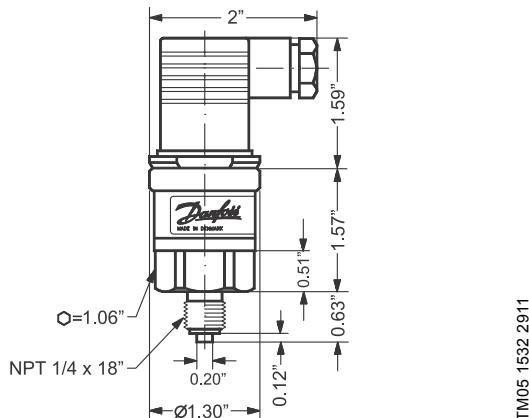


Fig. 67 Dimensional sketch

Grundfos differential-pressure sensor, DPI



Grundfos differential-pressure sensor, DPI	Pressure range [psi (bar)]	Product number
• 1 sensor incl. 0.9 m screened cable (7/16" connections)	0 - 8.7 (0 - 0.6)	96611522
• 1 original DPI bracket (for wall mounting)	0 - 14.5 (0 - 1.0)	96611523
• 1 Grundfos bracket (for mounting on motor)	0-23 (0 - 1.6)	96611524
• 2 M4 screws for mounting of sensor on bracket	0-36 (0 - 2.5)	96611525
• 1 M6 screw (self-cutting) for mounting on 3 HP and smaller	0-58 (0 - 4.0)	96611526
• 1 M8 screw (self-cutting) for mounting on 5-10 HP	0-87 (0 - 6.0)	96611527
• 1 M10 screw (self-cutting) for mounting on 15-25 HP		
• 1 M12 screw (self-cutting) for mounting on 30 HP	0-145 (0-10)	96611550
• 3 capillary tubes (short/long)		
• 2 fittings (1/4" - 7/16")		
• 5 cable clips (black)		
• Installation and operating instructions		


Select the differential-pressure sensor so that the maximum pressure of the sensor is higher than the maximum differential pressure of the pump.

The sensor housing and parts in contact with the liquid are made of Inox DIN 1.4305 (3) with composite PA top (2). The connections (4) are DIN 1.4305, 7/16" UNF connection and gaskets are FKM.

A black and screened cable (1) goes through a screwed connection PG with M 12 x 1.5 connection.

The sensor is supplied with angular bracket for mounting on motor or bracket for wall mounting.

A specially coated silicon chip is used for greater accuracy.

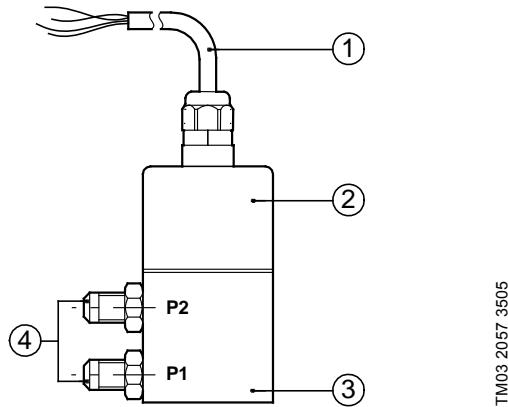

TM03 2057 3505

Fig. 68 DPI sensor

Technical data

Grundfos differential-pressure sensor, DPI

Product number	96611522	96611523	96611524	96611525	96611526	96611527	96611550
Pressure ranges, differential pressure [psi (bar)]	0 - 8.7 (0 - 0.6)	0 - 14.5 (0 - 1.0)	0-23 (0 - 1.6)	0-36 (0 - 2.5)	0-58 (0 - 4.0)	0-87 (0 - 6.0)	0-145 (0-10)
Supply voltage					12-30 VDC		
Output signal					4-20 mA		
Load [Ω]				24 V: max. 500 [Ω], 16 V: max. 200 [Ω], 12 V: max. 100 [Ω]			
Maximum system pressure, P1 and P2 simultaneously [psi (bar)]					232 (16)		
Rupture pressure [bar]					1.5 x system pressure		
Measuring accuracy					2.5 % BFSL		
Response time					< 0.5 seconds		
Liquid temperature range					+14 °F to +158 °F (-10 °C to +70 °C)		
Storage temperature range					-40 °F to +176 °F (-40 °C to +80 °C)		
Electrical connection					26 GA, 3 ft cable - M12 x 1.5 in sensor top		
Short circuit-proof					Yes		
Protected against reverse polarity					Yes		
Over supply voltage					Yes		
Materials in contact with liquid					DIN 1.4305 FKM and PPS		
Enclosure class					IP55		
Weight [lb]					1.2		
EMC (electromagnetic compatibility)					According to EN 60335-1		
Emission/immunity					According to EN 61800-3		
Connections					7/16"-UNF		
Sealing material					FKM		

Dimensions

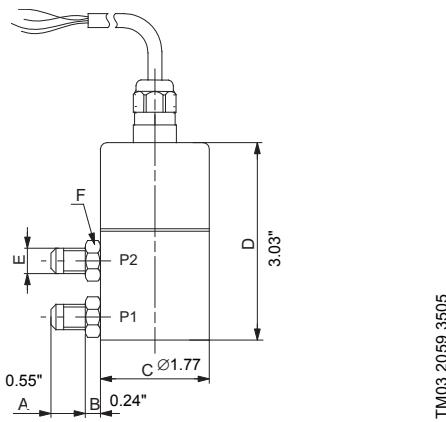


Fig. 69 Dimensional sketch

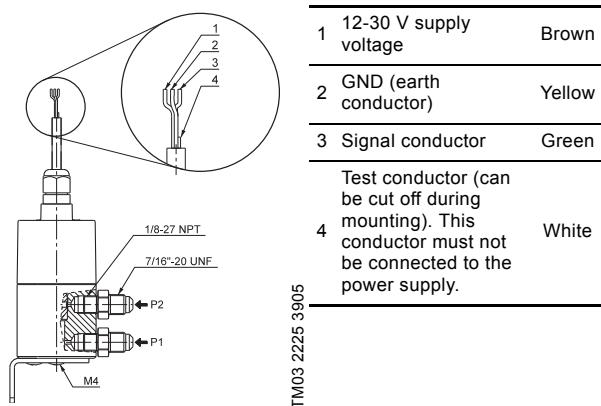


Fig. 70 Wiring

Grundfos differential-pressure sensor, DPI g.2 version



Grundfos differential-pressure sensor, DPI g.2 version	Pressure range [psi (bar)]	Product number
	0 - 8.7 (0 - 0.6)	97747194
	0 - 14.5 (0 - 1.0)	97747195
	0-23 (0 - 1.6)	97747196
	0-36 (0 - 2.5)	97747197
	0-58 (0 - 4.0)	97747198
	0-87 (0 - 6.0)	97747199
	0-145 (0-10)	97747200

- TM04 7866 2410
- 1 sensor
 - 1 capillary tube short version
 - 1 fitting for capillary tube
 - 6 ft (1.8 m) cable
 - 1 installation and operation instructions

Select the differential-pressure sensor so that the maximum pressure of the sensor is higher than the maximum differential pressure of the pump.

All materials used for DPI 2 are 316 L.

Fitting connection for capillary tube is 7/16" UNF.

Cable with M12 x 4 connector.

Sensor is supplied with fitting for capillary tubing.

Measuring technology is based on Coated Silicon Chip.

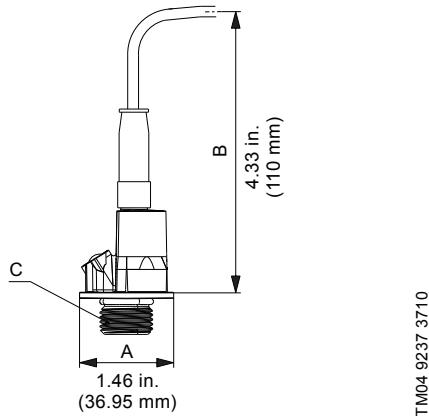


Fig. 71 DPI sensor g.2 version

Technical data

Grundfos differential-pressure sensor, DPI g.2 version

Product number	97747194	97747195	97747196	97747197	97747198	97747199	97747200
Pressure ranges, differential pressure [psi (bar)]	0 - 8.7 (0 - 0.6)	0 - 14.5 (0 - 1.0)	0-23 (0 - 1.6)	0-36 (0 - 2.5)	0-58 (0 - 4.0)	0-87 (0 - 6.0)	0-145 (0-10)
Supply voltage					12-30 VDC		
Output signal					4-20 mA		
Load [Ω]			30 V DC: max. 900 ohms [Ω], 1.3 V: max. 100 [Ω], 12.5 V: max. 60 [Ω]				
Maximum system pressure, P1 and P2 simultaneously [psi (bar)]					870 (60)		
Rupture pressure [bar]				1.5 x system pressure			
Measuring accuracy				2.0 % FS			
Response time				< 100 ms (typical 50 ms)			
Liquid temperature range				-22 to +212 °F (-30 to +100 °C)			
Storage temperature range				-67 to +158 °F (-55 to +70 °C)			
Electrical connection				27 ga, 6 ft (1.8) cable M 12 x 4			
Short circuit-proof				Yes			
Protected against reverse polarity				Yes			
Over supply voltage				Yes			
Materials in contact with liquid				AISI 316 L			
Enclosure class				IP67			
Weight [lb]				1.2			
EMC (electromagnetic compatibility)				According to EN 61326-1			
Connections				7/16"-UNF			
Sealing material				EPDM			

Dimensions


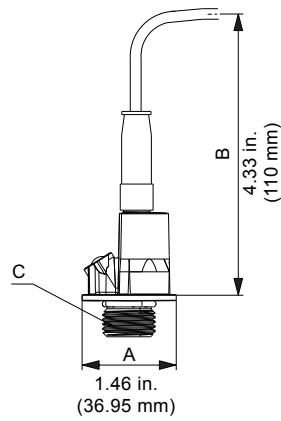


Fig. 72 DPI sensor g.2 version

TM04 9237 3710

Electrical connections

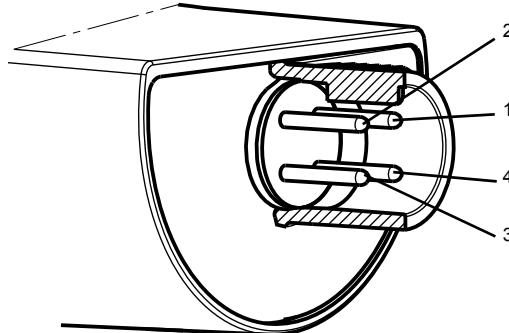

TM04 7156 1610

Fig. 73 Electrical connections

PIN	1	2	3	4
Wire color	Brown	Grey	Blue	Black
Output 4-20 mA	+	Not used	-	Not used
Output 2 x 0-10 V	+	Pressure signal	-*	Temperature signal

* Common ground for both pressure and temperature signal.

* Power supply (screened cable): SELV or PELV.

Flow transmitters

- Flow tube in AISI 316 mounted with transmitter
- Transmitter AISI 316 L
- 4-20 mA output signal
- 2 x flanges
- 15 ft cable free ends
- quick guide.



TM04 7362 2210

Type	Flow range [gpm]	Connection	O-ring		Flange material		Product number
			EPDM	FKM	Cast iron	Stainless	
VFI 0.3-6	1.3 - 26	3/4"	●		●		97686127
	1.3 - 2.6	3/4"	●			●	97688293
VFI 0.6-12	2.6 - 53	1"	●		●		97686129
	2.6 - 53	1"	●			●	97688295
VFI 1.3-25	5.7 - 110	1 1/4"	●		●		97686141
	5.7 - 110	1 1/4"	●			●	97688297
VFI 2-40	8.8 - 176	1 3/4"	●		●		97686143
	8.8 - 176	1 3/4"	●			●	97688299
VFI 3.2-64	14-282	2"	●		●		97686145
	14-282	2"	●			●	97688301
VFI 5.2-104	23-458	2 1/2"	●		●		96788476
VFI 8-160	35-704	3"	●		●		97788478
VFI 8-160	53-1060	4"	●		●		97788492

For more information about the VFI sensor, see the Grundfos Direct Sensors data booklet, publication number 97790189, at www.grundfos.com (Grundfos Product Center).

Gauges for CRE, CRIE, CRNE

Accessory	Measuring range	Product number
Liquid filled pressure gauge	30" Hg - 30 psi	91123566
• AISI 304/Copper	0-60 psi	00ID8562
	0-100 psi	00ID8563
	0-160 psi	00ID8564
	0-200 psi	00ID8565
	0-300 psi	00ID8566
	0-400 psi	00ID8567
	0-600 psi	00ID8568
Liquid filled pressure gauge	30" Hg - 30 psi	91130835
• AISI 316	0-60 psi	00ID8569
	0-100 psi	00ID8570
	0-160 psi	00ID8571
	0-200 psi	00ID8572
	0-300 psi	00ID8573
	0-400 psi	00ID8574
	0-600 psi	00ID8575
	0-200 psi	00ID8576

Remote controls

Grundfos GO Remote

Grundfos GO Remote is used for wireless infrared or radio communication with the pumps.

Various Grundfos GO Remote variants are available. The variants are described in the following.

MI 202 and MI 204

The MI 202 and MI 204 are add-on modules with built-in infrared and radio communication. The MI 202 can be used in conjunction with an Apple iPhone or iPod with 30-pin connector and iOS. 5.0 or later, e.g. fourth generation iPhone or iPod.

The MI 204 can be used in conjunction with an Apple iPhone or iPod with Lightning connector, e.g. fifth generation iPhone or iPod.

(The MI 204 is also available together with an Apple iPod touch and a cover.)



Fig. 74 MI 202 and MI 204

Supplied with the product:

- Grundfos MI 202 or MI 204
- sleeve
- quick guide
- charger cable.

TM05 3887 1612 - TM05 7704 1513

MI 301

The MI 301 is a module with built-in infrared and radio communication. The MI 301 can be used in conjunction with Android or iOS-based smart devices with a Bluetooth connection. The MI 301 has rechargeable Li-ion battery and must be charged separately.



TM05 3890 1712

Fig. 75 MI 301

Supplied with the product:

- Grundfos MI 301
- sleeve
- battery charger
- quick guide.

Product numbers

Grundfos GO Remote variant	Product number
Grundfos MI 202	98046376
Grundfos MI 204	98424092
Grundfos MI 204 including iPod touch	98612711
Grundfos MI 301	98046408

CIU communication interface units



GIA 6118

Fig. 76 Grundfos CIU communication interface unit

The CIU units enable communication of operating data, such as measured values and setpoints, between CRE, CRIE, CRNE pumps and a building management system. The CIU unit incorporates a 24-240 VAC/VDC power supply module and a CIM module. It can either be mounted on a DIN rail or on a wall.

We offer the following CIU units:

CIU 100

For communication via LonWorks.

CIU 150

For communication via PROFIBUS DP.

CIU 200

For communication via Modbus RTU.

CIU 250

For wireless communication via GSM/GPRS.

CIU 271

For communication via Grundfos Remote Management (GRM).

CIU 300

For communication via BACnet MS/TP.

Description	Fieldbus protocol	Product number
CIU 100	LonWorks	96753735
CIU 150	PROFIBUS DP	96753081
CIU 200	Modbus RTU	96753082
CIU 250*	GSM/GPRS	96787106
CIU 271*	GRM	96898819
CIU 300	BACnet MS/TP	Contact Grundfos


* Antenna not included. See below.

Antennas for CIU 250 and 270

Description	Product number
Antenna for roof	97631956
Antenna for desk	97631957

For further information about data communication via CIU units and fieldbus protocols, see the CIU documentation available at www.grundfos.com (Grundfos Product Center).

CIM communication interface modules



GIA 6121

Fig. 77 Grundfos CIM communication interface module

The CIM modules enable communication of operating data, such as measured values and setpoints, between CRE, CRIE or CRNE pumps of 11-22 kW and a building management system. The CIM modules are add-on communication modules which are fitted in the terminal box of CRE, CRIE, CRNE pumps of 11-22 kW.

Note: CIM modules must be fitted by authorised persons.

We offer the following CIM modules:

CIM 100

For communication via LonWorks.

CIM 150

For communication via PROFIBUS DP.

CIM 200

For communication via Modbus RTU.

CIM 250

For wireless communication via GSM/GPRS.

CIM 271

For communication via Grundfos Remote Management (GRM).

CIM 300

For communication via BACnet MS/TP.

Description	Fieldbus protocol	Product number
CIM 100	LonWorks	96824797
CIM 150	PROFIBUS DP	96824793
CIM 200	Modbus RTU	96824796
CIM 250*	GSM/GPRS	96824795
CIM 271*	GRM	96898815
CIM 300	BACnet MS/TP	Contact Grundfos

* Antenna not included. See below.

Antennas for CIM 250 and 270

Description	Product number
Antenna for roof	97631956
Antenna for desk	97631957

For further information about data communication via CIM modules and fieldbus protocols, see the CIM documentation available at www.grundfos.com (Grundfos Product Center).

MP 204 motor protector



TM03 1471 2205

Fig. 78 MP 204

The MP 204 is an electronic motor protector and data collecting unit. Apart from protecting the motor, it can also send information to a control unit via GENIbus, like for instance:

- trip
- warning
- energy consumption
- input power
- motor temperature.

The MP 204 protects the motor primarily by measuring the motor current by means of a true RMS measurement.

The pump is protected secondarily by measuring the temperature with a Tempcon sensor, a Pt100/Pt1000 sensor and a PTC sensor/thermal switch.

The MP 204 is designed for single- and three-phase motors.

Note: The MP 204 must not be used together with frequency converters.

Features

- Phase-sequence monitoring
- indication of current or temperature
- input for PTC sensor/thermal switch
- indication of temperature in °C or °F
- 4-digit, 7-segment display
- setting and status reading with the Grundfos R100 remote control
- setting and status reading via the Grundfos GENIbus fieldbus.

Tripping conditions

- Overload
- underload (dry running)
- temperature
- missing phase
- phase sequence
- overvoltage
- undervoltage
- power factor ($\cos \varphi$)
- current unbalance.

Warnings

- Overload
- underload
- temperature
- overvoltage
- undervoltage
- power factor ($\cos \varphi$)
- run capacitor (single-phase operation)
- starting capacitor (single-phase operation)
- loss of communication in network
- harmonic distortion.

Learning function

- Phase sequence (three-phase operation)
- run capacitor (single-phase operation)
- starting capacitor (single-phase operation)
- identification and measurement of Pt100/Pt1000 sensor circuit.

Product number

Description	Product number
MP 204 motor protection	96079927

16. Variants

Lists of variants on request

Although the Grundfos CR(E)-H, CRN(E)-H product range offers a number of pumps for different applications, customers require specific pump solutions to satisfy their needs.

Below please find the range of options available for customizing the CR(E)-H, CRN(E)-H pumps to meet the customers' demands. Contact Grundfos for further information or for requests other than the ones mentioned below.

Motors

Variant	Description
Explosion-proof motors	For operation in hazardous atmospheres, explosion-proof or dust-ignition-proof motors may be required.
Motors with anti-condensation heating unit	For operation in humid environments motors with built-in anti-condensation heating may be required.
Different motor brand	If technically possible, Grundfos can fit the pump with a motor of a brand other than the standard. This will normally increase the time of delivery. Alternatively, the pump can be supplied without a motor (motor thrust rating must be checked).
Oversized motor	Ambient temperatures above 104 °F or installation at altitudes of more than 3280 ft above sea level require the use of an oversized motor (i.e. derating).
4-pole motors	Grundfos offers standard motors fitted with 4-poles.

Connections and other variants

Variant	Description
Pipe connections	In addition to the wide range of standard flange connections, DIN standard flanges are available. Customized flanges are available according to specifications.
Electropolished pumps	To substantially reduce the risk of corrosion of the materials. For use in the pharmaceutical/food industry.

Shaft seals

Variant	Description
Shaft seal with FFKM O-ring material	We recommend shaft seals with FFKM or FXM o-ring material for applications where the pumped liquid may damage the standard O-ring material.
Seal with flush, quench seal	Recommended for applications involving crystallizing, hardening or sticky liquids.
Cool-Top® shaft seal system	Recommended for applications involving extremely high temperatures. No conventional mechanical shaft seal can withstand liquid temperatures of up to 356 °F for any length of time. For that type of application, we recommend Grundfos' unique air-cooled shaft seal system. In order to ensure a low liquid temperature around the standard shaft seal, the pump is fitted with a special air-cooled shaft seal chamber. No separate cooling is required.
Double shaft seal with pressure chamber	Recommended for applications involving poisonous or explosive liquids. Protects the surrounding environment and the people working in the vicinity of the pump. Consists of two seals mounted in a "back-to-back" arrangement inside a separate pressure seal chamber. As the pressure in the chamber is higher than the pump pressure, leakage is prevented. A dosing pump or a special pressure-intensifier generates the seal chamber pressure.
CRN MAGdrive	Magnetically driven pumps for industrial applications. Key applications are industrial processes involving the handling of aggressive, environmental, dangerous or volatile liquids, e.g. organic compounds, solvents, etc.

Pumps

Variant	Description
Low-temperature pump to -4 °F	Exposed to temperatures down to -40 °F, coolant pumps may require neck-rings with a different diameter in order to prevent impeller drag.
Low-NPSH pump (improved suction)	Recommended for boiler-feed applications where cavitation may occur due to poor inlet conditions.
Belt-driven pumps	Belt-driven pumps designed to operate in places with limited space or where no electrical power is available.
Pumps for pharmaceutical and biotechnological applications	CRN(E) pumps designed for applications requiring the sterilization and CIP capability of pipes, valves and pumps. (CIP = Cleaning-In-Place).

17. Grundfos Product Center

Online search and sizing tool to help you make the right choice.

<http://product-selection.grundfos.com>



"SIZING" enables you to size a pump based on entered data and selection choices.

"REPLACEMENT" enables you to find a replacement product. Search results will include information on

- the lowest purchase price
- the lowest energy consumption
- the lowest total life cycle cost.

www.grundfos.us

GRUNDFOS PRODUCT CENTER

HOME FIND PRODUCT COMPARE YOUR PROJECTS SAVED ITEMS HELP 1.5.29

FIND PRODUCTS AND SOLUTIONS

Input product number or a whole or partial product name

SIZING Enter pump sizing **CATALOG** Product and services **REPLACEMENT** Replace an old pump with a new **LIQUIDS** Find liquid pump

QUICK SIZING

Enter duty point:

Flow (Q)*	US gpm	ft
	in	m

Select what to size by:

Size by application
 Size by pump design
 Size by pump family

START SIZING

ADVANCED SIZING: Advanced sizing by application Guided selection

"CATALOG" gives you access to the Grundfos product catalog.

"LIQUIDS" enables you to find pumps designed for aggressive, flammable or other special liquids.

All the information you need in one place

Performance curves, technical specifications, pictures, dimensional drawings, motor curves, wiring diagrams, spare parts, service kits, 3D drawings, documents, system parts. The Product Center displays any recent and saved items - including complete projects - right on the main page.

Downloads

On the product pages, you can download Installation and Operating Instructions, Data Booklets, Service Instructions, etc. in PDF format.

Grundfos GO



Mobile solution for professionals on the GO!

Grundfos GO is the mobile tool box for professional users on the go. It is the most comprehensive platform for mobile pump control and pump selection including sizing, replacement and documentation. It offers intuitive, handheld assistance and access to Grundfos online tools, and it saves valuable time for reporting and data collection.



GET IT ON
Google play

Available on the
App Store



18. Submittal data

Client information

Project title:	Client name:
Reference number:	Client number:
Client contact:	Client phone number: ()

Location information

For:	Unit:		
Site:	Service:		
Address:	City:	State:	Zip code:

Application information

Operating conditions			Pumped fluid			
	Max.	Norm.	Min.	Rated	Max.	Norm.
Capacity (gpm)				Fluid temperature (°F) at designated temperature		
Inlet pressure (psig)				Specific gravity		
Outlet pressure (psig)				Vapor pressure (psia)		
Differential head (ft)				Viscosity (cp)		
Hydraulic power at designated capacity				Fluid ph:		Chlorides (ppm):
NPSH available (ft)				Hazardous:		Corrosion/erosion caused by:
Service				Flammable:		
Continuous				Other:		
Intermittent (starts/day):						

Pump information

Model information from Type Key and Codes:

Quantity required:

Minimum required flow:

NPSH required at duty point:

Product Guide additional information pages

Materials page number:

Performance curve page number:

Technical data page number:

Motor data page number:

Motor information

Hp:	Phase:	Voltage:	Enclosure:
-----	--------	----------	------------

Custom-built pump information (optional):

Additional information

19. Quotation text

CR-H, CRN-H, CRE-H, CRNE-H

Horizontal, non-self-priming, multistage, end-suction, centrifugal pump for installation in pipe systems and mounting on a foundation.

The pump has the following characteristics:

- impellers and intermediate chambers are made of AISI _____ stainless steel
- pump head and volute are made of _____
- power transmission is via cast iron split coupling.
- pipe connection is via _____

The motor is a _____ -phase AC motor.

Technical

Rated flow: _____ gpm

Rated head: _____ ft

Minimum liquid temperature: _____ °F

Maximum liquid temperature: _____ °F

Type of shaft seal: _____

Materials

Material, pump housing: _____

Material, shaft: AISI _____ stainless steel

Material, impeller: AISI _____ stainless steel

Material, sleeve: AISI _____ stainless steel

Material, seal metal: AISI _____ stainless steel

- seal face: _____
- seal face: _____
- seal elastomer: _____

Installation

Maximum ambient temperature: _____ °F

Maximum pressure at stated temp.: _____ psi / °F

Standard, pipe connection: _____

Size, pipe connection: _____

Rated pressure, pipe connection: _____ psi

Frame size for motor: _____ NEMA

Electrical data

Motor type: _____

Rated power (P2): _____ Hp

Frequency: _____ Hz

Rated voltage: _____ V

Rated current: _____ A

Service factor: _____

Starting current: _____ A

Rated speed: _____ rpm

Full load motor efficiency: _____ %

Insulation class: _____

Additional

Gross weight: _____ lbs.

Shipping volume: _____ ft³

Model: _____

98665987 0518

ECM: 1233699

Grundfos Kansas City
17100 West 118th Terrace
Olathe, Kansas 66061
Phone: 913-227-3400
Fax: 913-227-3500
www.grundfos.us

Grundfos Canada
2941 Brighton Road
Oakville, Ontario L6H 6C9 Canada
Phone: +1-905-829-9533
Fax: +1-905-829-9512
www.grundfos.ca

Grundfos México
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
C.P. 66600 Apodaca, N.L. Mexico
Phone: 011-52-81-8144 4000
Fax: 011-52-81-8144 4010
www.grundfos.mx